

PAPER

## Sawtooth control using electron cyclotron current drive in the presence of energetic particles in high performance ASDEX Upgrade plasmas

To cite this article: I T Chapman *et al* 2013 *Plasma Phys. Control. Fusion* **55** 065009


View the [article online](#) for updates and enhancements.

### Related content

- [Sawtooth control using electron cyclotron current drive in ITER demonstration plasmas in DIII-D](#)  
I.T. Chapman, R.J. La Haye, R.J. Buttery et al.
- [Topical Review](#)  
I T Chapman
- [Power requirements for electron cyclotron current drive and ion cyclotron resonance heating for sawtooth control in ITER](#)  
I.T. Chapman, J.P. Graves, O. Sauter et al.

### Recent citations

- [Non-linear MHD simulations of sawteeth and their control by current and power depositions](#)  
O. Février *et al*
- [A model-based, multichannel, real-time capable sawtooth crash detector](#)  
H van den Brand *et al*
- [Interplay between central ECRH and saturated  \$\(m, n\) = \(1, 1\)\$  MHD activity in mitigating tungsten accumulation at ASDEX Upgrade](#)  
M. Sertoli *et al*

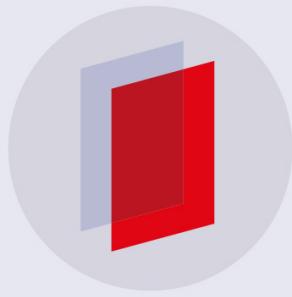

**IOP | ebooks™**

Bringing you innovative digital publishing with leading voices to create your essential collection of books in STEM research.

Start exploring the collection - download the first chapter of every title for free.

# Sawtooth control using electron cyclotron current drive in the presence of energetic particles in high performance ASDEX Upgrade plasmas

I T Chapman<sup>1</sup>, V Igochine<sup>2</sup>, M Maraschek<sup>2</sup>, P J McCarthy<sup>3</sup>, G Tardini<sup>2</sup>,  
the ASDEX Upgrade ECRH Group and the ASDEX Upgrade Team

<sup>1</sup> Euratom/CCFE Fusion Association, Culham Science Centre, Abingdon, OX14 3DB, UK

<sup>2</sup> Max-Planck Institut für Plasmaphysik, Euratom-Association, D-85748 Garching, Germany

<sup>3</sup> Department of Physics, University College Cork, EURATOM-Association DCU, Cork, Ireland

E-mail: [ian.chapman@ccfe.ac.uk](mailto:ian.chapman@ccfe.ac.uk)

Received 4 February 2013, in final form 4 April 2013

Published 14 May 2013

Online at [stacks.iop.org/PPCF/55/065009](http://stacks.iop.org/PPCF/55/065009)

## Abstract

Sawtooth control using steerable electron cyclotron current drive (ECCD) has been demonstrated in ASDEX Upgrade plasmas with a significant population of energetic ions in the plasma core and long uncontrolled sawtooth periods. The sawtooth period is found to be minimized when the ECCD resonance is swept to just inside the  $q = 1$  surface. By utilizing ECCD inside  $q = 1$  for sawtooth control, it is possible to avoid the triggering of neoclassical tearing modes (NTMs), even at significantly higher pressure than anticipated in the ITER baseline scenario. Operation at 25% higher normalized pressure has been achieved when only modest ECCD power is used for sawtooth control compared to identical discharges without sawtooth control when NTMs are triggered by the sawteeth. Modelling suggests that the destabilization arising from the change in the local magnetic shear caused by the ECCD is able to compete with the stabilizing influence of the energetic particles inside the  $q = 1$  surface.

(Some figures may appear in colour only in the online journal)

## 1. Introduction

Sawtooth oscillations in tokamak plasmas are characterized by quasi-periodic collapses in the temperature and density in the plasma core [1]. The drop in fusion performance caused by sawteeth is not of significant concern for ITER; however, the triggering of more deleterious instabilities, such as neoclassical tearing modes (NTMs), means that sawtooth control remains an important issue. A typical sawtooth cycle exhibits three phases: (i) the sawtooth ramp phase during which the plasma density and temperature increase approximately linearly with respect to time; (ii) the precursor phase, during which a helical magnetic perturbation grows until (iii) the fast collapse phase, when the density and temperature drop rapidly. In order to control sawteeth one must use actuators which can affect the second phase in the cycle—the trigger of the instability growth. The sawtooth is thought to be caused

by the growth of a  $n = m = 1$  internal kink mode—a fundamental magnetohydrodynamic (MHD) oscillation of the form  $\xi \sim \exp(im\theta - in\phi)$  where  $m$  and  $n$  are the poloidal and toroidal mode number respectively,  $\xi$  is the perturbation to the plasma and  $\theta$  and  $\phi$  are the poloidal and toroidal angles.

Minority populations of super thermal ions are predicted analytically and demonstrated experimentally to delay the onset of the  $n/m = 1/1$  internal kink mode, thereby increasing the period between sawtooth crashes. The presence of fusion-born alpha particles in ITER is predicted to significantly lengthen the sawtooth period [2–5], which has been shown empirically to result in an increased likelihood of triggering NTMs [6, 7]. Consequently a control scheme which can maintain small, frequent sawtooth crashes which avoid seeding deleterious NTMs whilst still flushing irradiating impurities from the plasma core is necessary in ITER.

The fundamental trigger of the sawtooth crash is thought to be the onset of an  $m = n = 1$  mode, although the dynamics of this instability are constrained by many factors including not only the macroscopic drive from ideal MHD, but collisionless kinetic effects related to high energy particles [8–10] and thermal particles [11, 12], as well as non-ideal effects localized in the narrow layer around  $q = 1$ . Here, the safety factor is  $q = d\psi_\phi/d\psi_\theta$  and the magnetic shear is  $s = (r/q)dq/dr$  with  $\psi_\theta$  and  $\psi_\phi$  the poloidal and toroidal magnetic fluxes respectively. A heuristic model predicts that a sawtooth crash will occur in the presence of energetic ions when various criteria are met [2, 13, 14], with the defining one usually given in terms of a critical magnetic shear determined either by the pressure gradient,  $s_1 > s_{\text{crit}}(\omega_{*i})$ , or by the mode potential energy, written as:

$$s_1 > \max\left(\frac{4\delta W}{\xi_0^2 \epsilon_1^2 R B^2 c_\rho \hat{\rho}}, s_{\text{crit}}(\omega_{*i})\right) \quad (1)$$

where  $c_\rho$  is a normalization coefficient of the order of unity,  $\hat{\rho} = \rho_i/r_1$ ,  $\rho_i$  is the ion Larmor radius,  $R$  is the major radius,  $B$  is the toroidal field,  $\epsilon_1 = r_1/R$ ,  $r_1$  is the radial position of the  $q = 1$  surface,  $\omega_{*i}$  is the ion diamagnetic frequency and  $\xi_0$  is the magnetic perturbation at the magnetic axis. The change in the kink mode potential energy is defined such that  $\delta W = \delta W_{\text{core}} + \delta W_h$  and  $\delta W_{\text{core}} = \delta W_f + \delta W_{\text{KO}}$  where  $\delta W_{\text{KO}}$  is the change in the mode energy due to the collisionless thermal ions [11],  $\delta W_h$  is the change in energy due to the fast ions and  $\delta W_f$  is the ideal fluid mode drive [15]. It is clear that, if this model for sawtooth onset is correct, the sawteeth can be deliberately stimulated by increasing the local magnetic shear at  $q = 1$ ,  $s_1$ . A more recent model [14] also captures this  $s_1$  dependence.

When electron cyclotron resonance heating (ECRH) is applied to the plasma, the local current density changes because the temperature also changes, and subsequently causes a change in the conductivity. Adding a toroidal component to the wave vector of the launched EC waves results in an electron cyclotron driven current either parallel (co-ECCD) or anti-parallel (counter-ECCD) to the ohmic current. When applied near the  $q = 1$  surface, the radius of the  $q = 1$  surface,  $r_1$ , is moved and the magnetic shear at  $q = 1$ ,  $s_1$ , is changed, thus affecting the likelihood of a sawtooth crash according to equation (1).

Control of the sawtooth period with ECCD has been demonstrated on a number of tokamaks [16–22], and consequently has been included in the design of the sawtooth control system for ITER [23, 24]. The history of sawtooth control using current drive is reviewed in [25]. The suppression of sawteeth for NTM prevention using ECCD has been demonstrated directly at high pressure on ASDEX Upgrade by using co-ECCD just outside the  $q = 1$  surface [26]. At the end of the gyrotron pulse, a sawtooth crash occurred and an NTM was triggered, resulting in substantial degradation of the plasma performance. That said, it is widely accepted that sawteeth are unlikely to be avoided throughout an ITER discharge, and so a similar demonstration of avoidance of NTMs in high performance plasmas with deliberately paced frequent sawteeth is required. An additional benefit of using


ECCD for sawtooth control to avoid NTMs is that the electron cyclotron heating (ECH) is directed well inside  $q = 1$  and so is usefully heating the core of the plasma. Conversely if the ECCD is used to suppress NTMs at higher rational surfaces, notably at  $q = 2$ , the power is not used for heating and so significantly reduces the fusion yield,  $Q$  [27].

The remaining concern about sawtooth control achieved by current drive is whether changes in  $s_1$  can overcome the stabilization due to energetic particles. In ITER, there is likely to be a large stabilizing potential energy contribution,  $\delta W_h$  in equation (1) due to the fusion-born  $\alpha$  particles. Combining this with the small  $\hat{\rho}$  in the denominator means that the critical shear at which the internal kink mode becomes unstable is increased. Consequently, recent experiments have focussed on destabilizing sawteeth when there is a significant population of energetic particles in the plasma core. Sawtooth destabilization of long period sawteeth caused by fast ions with energies  $\geq 0.5$  MeV arising from ion cyclotron resonance heating (ICRH) was achieved in Tore Supra, even with a modest level of ECCD power [29, 30]. Similarly, ECCD destabilization has also been achieved despite ICRH-accelerated neutral beam injection (NBI) ions in the core of ASDEX Upgrade [31] as well as with normal NBI fast ions in DIII-D [32], ASDEX Upgrade [17] and JT-60U [33]. Despite these promising results, demonstration of NTM avoidance through sawtooth control in the presence of energetic particles with steerable ECCD has yet to be demonstrated in ITER-like conditions; this is what is addressed in this paper. In section 2 sawtooth control in high performance ASDEX Upgrade plasmas is shown in the presence of energetic NBI ions and the optimal resonance position to minimize the sawtooth period is found by sweeping the EC launching mirrors. After demonstrating the optimal deposition for ECCD in order to destabilize the sawteeth, the improvement in fusion performance with sawtooth control is discussed in section 3. In section 4 the effect of changing the magnetic shear is compared to the stabilizing drive from the fast ions using numerical simulation, before the implications of this work are discussed in section 5.

## 2. Sawtooth control using ECCD in the presence of energetic ions

In order to replicate typical ITER operational conditions with a significant population of energetic ions in the plasma core, ASDEX Upgrade [34] plasmas can be heated with NBI and ICRH. Figure 1 shows a typical ASDEX Upgrade discharge with 2 MW of ICRH combined with 12 MW of NBI operating at  $\beta_N \sim 2$  just above the target normalized pressure for ITER baseline plasmas (where  $\beta_N \sim 1.8$ ) and  $H_{98,y2} = 0.9$ . Here  $H_{98,y2}$  is the energy confinement enhancement factor,  $\beta_N = \beta a B_0/I_p$  where  $a$  is the minor radius,  $I_p$  (MA) is the plasma current,  $\beta = 2\mu_0 \langle p \rangle / B_0^2$  and  $\langle \dots \rangle$  represents a volume average and  $p$  is the plasma pressure. The magnetic field ( $B_T = 2.5$  T) and current ( $I_p = 1.1$  MA) mean that the safety factor at the 95% flux surface is  $q_{95} = 3.9$ . This is above the ITER design value of 3.0, but this was necessary in order to have the ICRH resonance position in the plasma core and the ECRH resonance off-axis. Nonetheless, the  $q$ -profile


28169

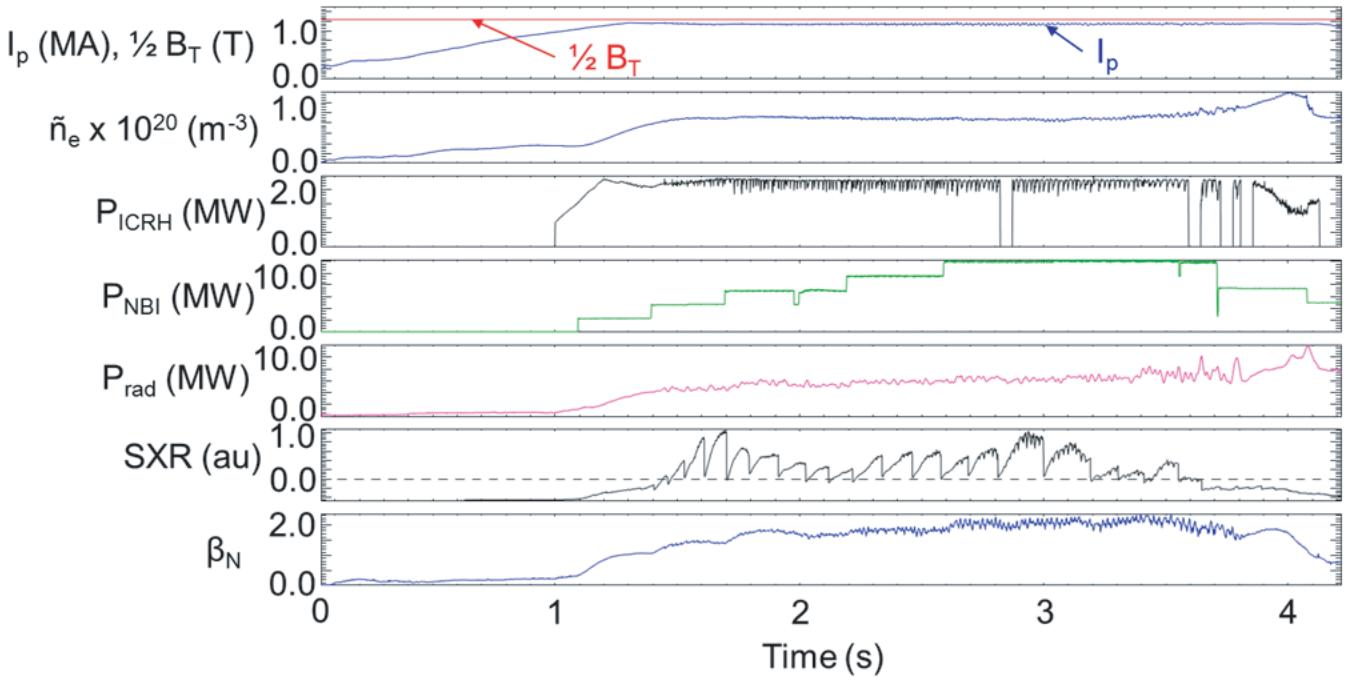

**Figure 1.** Time traces for a typical high performance ASDEX Upgrade plasma—discharge 28169—showing: the plasma current and half of the toroidal field; the line averaged density which is relatively constant over the sawtooth period; the ICRH heating power; the NBI heating power; the radiated power; the soft x-ray emission from a central channel; and the normalized plasma pressure,  $\beta_N$  which fractionally exceeds the ITER target value of 1.8.

has a broad low-shear region with the radial position of the  $q = 1$  surface is  $\rho_1 > 0.3$ , which is approaching the value of  $\rho_1 = 0.45$  expected in ITER. The plasma illustrated in figure 1 experiences long period sawteeth throughout  $\tau_{\text{saw}} \approx 150$  ms compared with an energy confinement time of  $\tau_E \approx 80$  ms. Scaling the sawtooth period by the resistive diffusion time [35] and  $r_1$ , this period is roughly equivalent to 45 s in ITER, which is approaching the expected critical sawtooth period likely to seed NTMs [6]. It should be noted that with 12 MW of uni-directional neutral beam heating, there is significant NBI-induced torque leading to a much faster toroidal rotation frequency than anticipated in ITER. This differential rotation is likely to inhibit the triggering of NTMs by 1/1 internal kinks. Finally, an important difference between these plasmas and the ITER baseline scenario is the fraction of fast ions: the NBI and ICRH induced fast ions in these ASDEX Upgrade plasmas constitute approximately 20% of the stored energy, whilst the fusion-born alphas and heating-induced fast ions in ITER result in a fast ion fraction,  $\langle \beta_h \rangle / \langle \beta \rangle$ , approaching 45% ( $\beta_\alpha$ ) from [36],  $\beta_{\text{NBI}}$  from [37].


The plasma performance in discharge 28169 shown in figure 1 is limited by the appearance of an  $m/n = 2/1$  tearing mode, triggered by a long sawtooth period at 2.3 s. Whilst this NTM is not disruptive, it means that the increments in NBI power at both 2.2 and 2.5 s lead to little improvement in the normalized pressure as the NTM progressively degrades the confinement, giving rise to the confinement enhancement factor of  $H_{98,y2} = 0.9$  below the ITER baseline assumption of  $H_{98,y2} = 1.0$ . It is exactly this situation—the lengthening of the sawtooth period

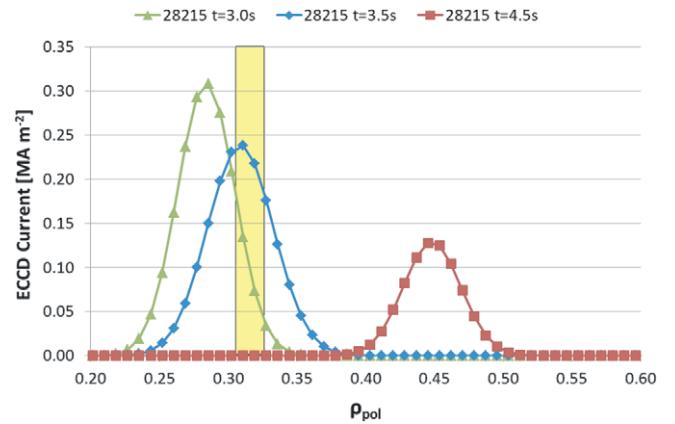

**Figure 2.** The ECCD driven current profile for ASDEX Upgrade discharge 28215 predicted by the TORBEAM code [38] when the resonance is inside, around and well outside the inversion radius found from the soft x-ray emission, marked by the shaded region.

by the presence of fast particles, leading to the triggering of NTMs which persistently degrade performance—which sawtooth control with ECCD aims to avoid, permitting higher performance and confinement improvement.

In order to find the optimal position for driven current to change the local magnetic shear and so destabilize the sawteeth, a sweep of the ECCD was performed using the steerable EC mirrors. A sweep was performed moving the EC resonance from  $\rho_{\text{dep}} = 0.2$  to  $\rho_{\text{dep}} = 0.45$  in 2.5 s to cross the  $q = 1$  surface, which was at  $\rho_1 \approx 0.32$ . Figure 2 shows the EC driven current profile predicted by the TORBEAM code [38] when the resonance is inside, around and well outside

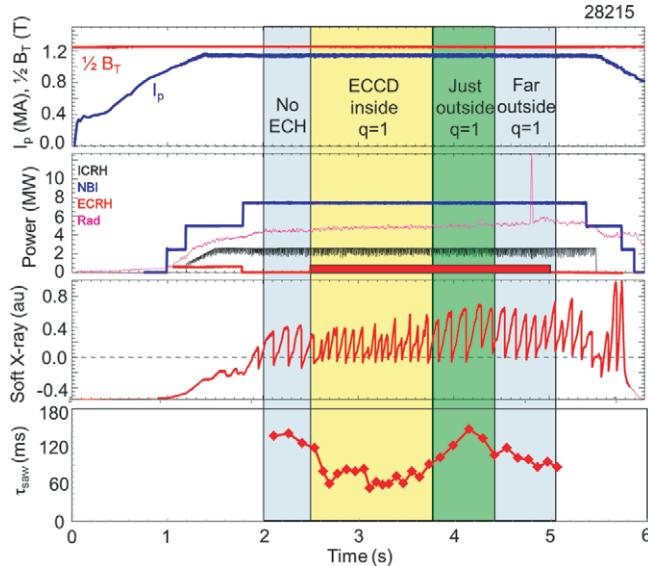

**Figure 3.** Time traces for ASDEX Upgrade discharge 28215 as the ECCD is swept from inside to outside the  $q = 1$  surface, showing: the plasma current and half the toroidal field; the ICRH, NBI, ECRH and radiated power; the soft x-ray emission from a central channel; and the sawtooth period as a function of time. The coloured bands indicate the position of the EC resonance predicted by the TORBEAM code with respect to the inversion radius found from the soft x-ray emission. The sawtooth period is minimized when the ECCD is inside  $q = 1$ .


the inversion radius found from the soft x-ray emission. In all cases, the toroidal component to the wave vector is such that the ECCD is reasonably narrow and affects only a small region of the current density profile. Previously it was shown that ECCD is more effective for sawtooth control than ECH in ASDEX Upgrade [17], so we concentrate on the effects of ECCD in this paper. The sawtooth behaviour during this ECCD sweep is shown in figure 3. The plasma is heated with 2 MW of core ICRH and only 7 MW of NBI so that the pressure is lower than in typical high-performance plasmas (such as that shown in figure 1). This facilitates a full sweep of the EC deposition to outside  $q = 1$ , which would almost certainly incur triggering of NTMs at higher pressure as it leads to longer sawtooth periods. The sawtooth period is clearly minimised when the EC deposition is inside  $q = 1$ , as expected [18, 25]. As the resonance is swept across  $\rho_1$  the sawtooth period lengthens above the level before the ECCD was applied, before returning to approximately the pre-ECCD level once more when the driven current is well outside  $\rho_1$  and no longer affecting the local magnetic shear,  $s_1$ . The fact that the sawtooth period when the ECCD is inside  $q = 1$  is consistently around half the level of that before the ECCD is applied, irrespective of the exact deposition level, means that robust control is likely to be achievable without requiring fine deposition feedback control. This relative insensitivity to the precise EC resonance position is utilized in the next section to optimize performance by applying ECCD optimized from this study, but at higher plasma pressures where the Shafranov shift, and correspondingly the  $q = 1$  radius, are different. The fact that a very marked destabilization of the sawteeth is observed in the presence of a relatively significant fraction of fast ions,

with some very energetic particles born due to RF heating, is encouraging for the applicability of ECCD sawtooth control in ITER.

### 3. Optimizing performance using ECCD sawtooth control in ITER demonstration plasmas

The sweeps of the EC deposition with the steerable mirrors outlined in section 2 allowed the optimal EC resonance location to be inferred. The relative insensitivity of the minimum in sawtooth period to the exact resonance location with respect to  $q = 1$  means that sawtooth control in ASDEX Upgrade can be achieved without real-time steering of the EC launcher mirrors. Indeed, this insensitivity allows the resonance location to be fixed and the pressure to be increased, whilst retaining frequent, controlled sawteeth despite the enhanced Shafranov shift at higher  $\beta$ . The EC mirror settings were fixed such that  $\rho_1 - \rho_{\text{dep}} \approx 0.1$ , then the auxiliary NBI power was incremented step-wise to increase the pressure and examine the efficacy of the sawtooth control for avoiding NTMs. Figure 4 shows two identical ASDEX Upgrade plasmas, one with 1 MW of core ECCD to keep the sawtooth period small (shot 28219), and one without core ECCD (shot 28221). In the absence of sawtooth control, a 2/1 NTM is triggered by a sawtooth crash at  $t = 2.15$  s at  $\beta_N = 2$ , only 10% above the ITER operating normalized pressure. Conversely, in shot 28219, only 1 MW of ECCD inside  $q = 1$  drives the internal kink mode unstable resulting in small, frequent sawteeth and avoiding NTMs throughout the discharge, even as the normalized pressure is increased to  $\beta_N = 3.0$ . The energy confinement enhancement factor reaches  $H_{98,y2}^{28219} = 1.25$  when the sawtooth control is applied, compared to only  $H_{98,y2}^{28221} = 0.95$  without ECCD mode control. Just as in DIII-D [32], a low level of core ECCD allows a sawtooth plasma with a broad low-shear  $q$ -profile to reach much higher normalized pressure than anticipated in ITER without exhibiting tearing modes, although in these ASDEX Upgrade plasmas the fast ion fraction and maximum energy are even higher than in previous results.

Figure 5 shows three very similar ASDEX Upgrade discharges with different core ECCD power levels: 28169 which has no core ECH, 28210 which has 0.8 MW of ECCD inside  $\rho_1$  to control sawteeth and 28208 which has 1.7 MW of ECCD. In the absence of ECCD for sawtooth control, a 2/1 NTM is triggered by a long sawtooth period at  $t = 2.32$  s, limiting the  $\beta_N$  achieved thereafter. In contrast, both plasmas with ECCD achieve short sawtooth periods throughout, consistently less than 100 ms, and as a result avoid NTMs allowing 25% higher normalized pressure to be attained. Whilst the higher ECCD power in shot 28208 does result in the lowest sawtooth period, it does not achieve a higher pressure since the sawteeth themselves do not deleteriously affect performance and one only needs to avoid the triggering of NTMs, which shot 28210 also achieves despite lower ECCD power. It is evident from figures 4 and 5 that sawtooth control with ECCD is effective for the avoidance of NTMs at auxiliary heating levels which would otherwise incur a sawtooth-triggered NTM. The NBI power is increased progressively in both figures to the maximum available power

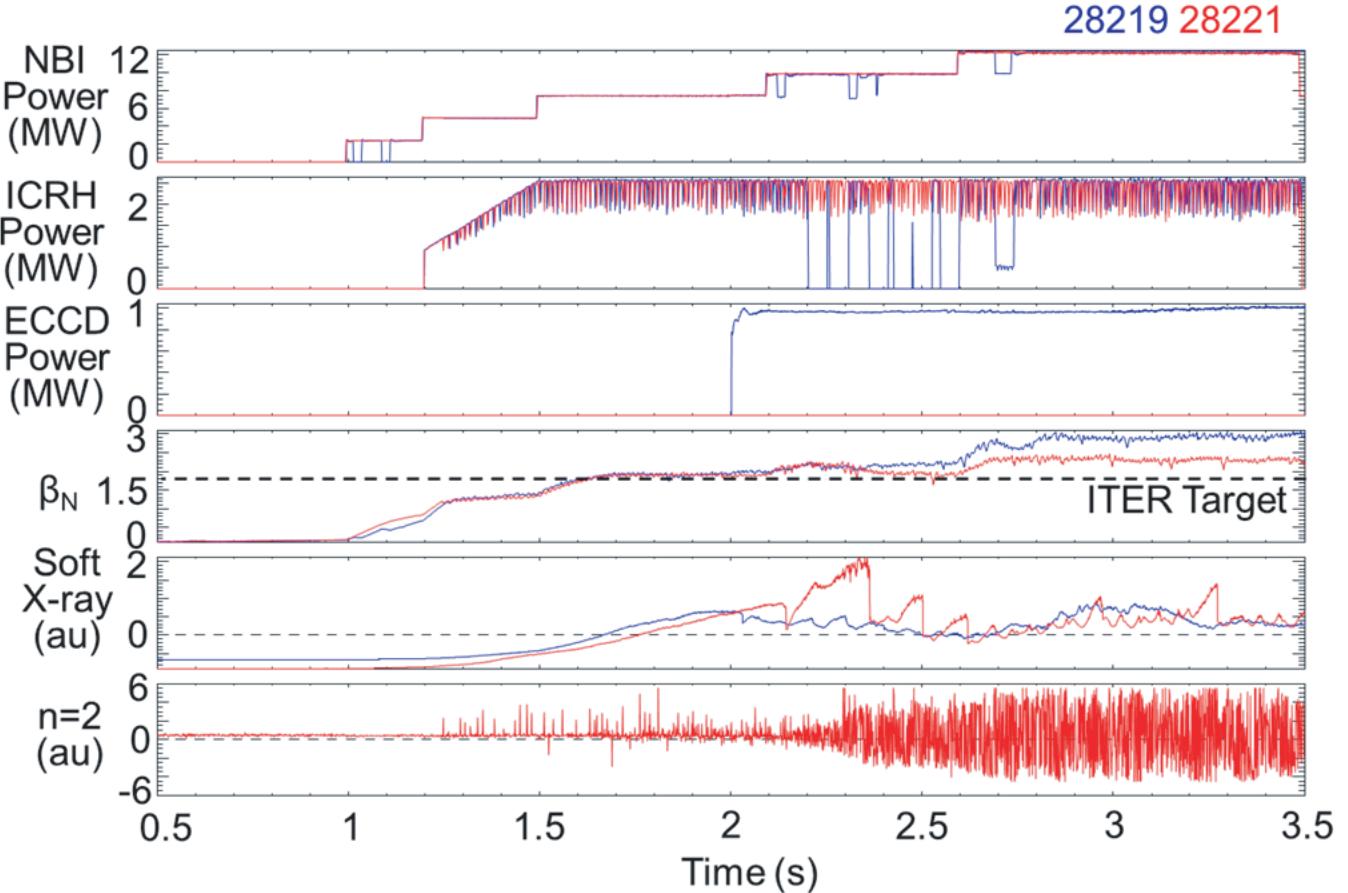

**Figure 4.** A comparison of ASDEX Upgrade discharges 28219 which has ECCD applied for sawtooth control and 28221 which does not. The time traces show the NBI heating power; the ICRH heating power; the ECCD power with the resonance position held fixed inside  $q = 1$ ; the normalized beta compared to the ITER target value; the soft x-ray emission from a central channel; and the  $n = 2$  mode activity measured by magnetic pick-up sensors. In shot 28221 a 3/2 NTM is triggered by a long sawtooth at 2.15 s and results in much lower plasma performance than shot 28219 where the sawtooth period is very short throughout.

in these ASDEX Upgrade plasmas and NTMs are avoided at all levels of heating (and thus fast ion fraction).

#### 4. Modelling the effect of ECCD in high performance, high fast ion fraction plasmas

In order to assess whether the change in the local magnetic shear produced by ECCD drive is responsible for the sawtooth control reported in sections 2 and 3, the linear stability of the internal kink mode has been assessed. Although such linear analysis cannot be used to infer the behaviour of the nonlinear sawtooth period, it is indicative of the sawtooth stability, and has been used to make successful experimental comparisons of sawtooth behaviour in MAST [39], TEXTOR [40], JET [41, 42], DIII-D [32] and ASDEX Upgrade [43, 44].

Fixed-boundary equilibria are reconstructed using the HELENA code [45], taking as input the current density profile from the CLISTE equilibrium code [46], which itself is constrained to include the ECCD profiles predicted by TORBEAM and the  $q = 1$  surface position inferred from the inversion radius found from soft x-ray emission. The ECCD was incorporated in CLISTE reconstruction by adding the ECCD current density profile from TORBEAM to the  $f d f/d\psi(\psi)$  source function which forms part of the interpretive run output.


Subsequently predictive CLISTE runs were made with and without the ECCD-modified  $f d f/d\psi$  profile. The resultant ECCD current density bump can then be back-compared to the TORBEAM prediction with good agreement—for instance at  $t = 3.5$  s the ECCD feature has a peak value of  $0.26 \text{ MA m}^{-2}$ , which is just 5% difference to the peak value of  $0.245 \text{ MA m}^{-2}$  from TORBEAM, as seen in figure 2. This technique produces the safety factor and local magnetic shear profiles illustrated in figure 6. Here the local shear is defined as [47]

$$s_{\text{local}} = -\vec{e}_\perp \cdot \nabla \times \vec{e}_\perp \quad (2)$$


where  $\vec{e}_\perp = \nabla\psi/|\nabla\psi| \times \vec{B}/B$  meaning that in cylindrical limit with circular flux surfaces, this approximates to

$$s_{\text{local}} = \frac{1}{qR} \frac{r}{q} \frac{dq}{dr} \quad (3)$$

and can be re-written to be expressed as variables directly calculated by CLISTE [48]. The increase in the local shear provided by the ECCD is clearly seen in figure 6(b). At  $t = 3.5$  s the ECCD deposition is near the  $\rho_1$  (found from the inversion radius) and as a result the local shear at  $q = 1$  (marked by vertical lines in figure 6(b)) increases by a factor of two compared to the case without ECCD included in the

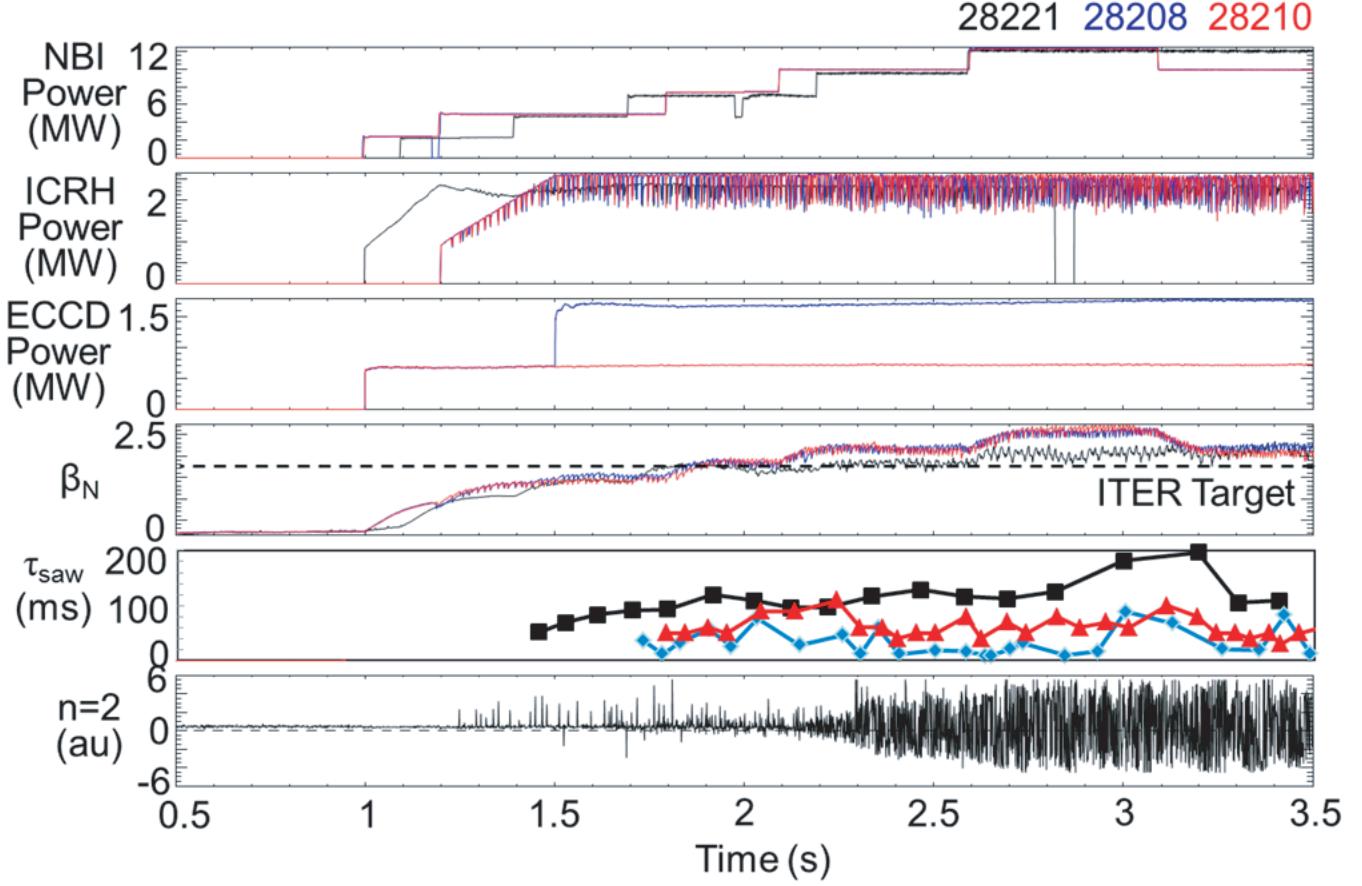

**Figure 5.** A comparison of the efficacy of ECCD sawtooth control at different ECCD power levels. The time traces show the NBI heating power; the ICRH heating power; the ECCD power used for sawtooth control with the resonance position fixed inside  $q = 1$ ; the normalized beta compared to the ITER target value; the sawtooth period found from the soft x-ray emission and the  $n = 1$  mode activity for shot 28221 where a 3/2 tearing mode is triggered by a sawtooth crash. The sawtooth period and achievable pressure are similar in discharges 28208 and 28210 despite different ECCD power levels, indicating that only a small driven current is required for efficient NTM avoidance.

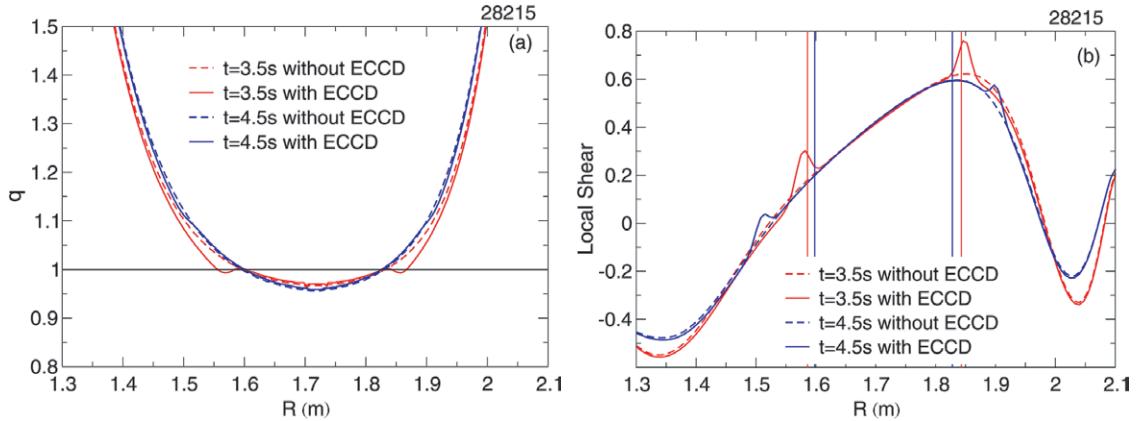


**Figure 6.** The (a)  $q$ -profile and (b) local magnetic shear as a function of major radius as calculated by CLISTE with (solid lines) and without (dashed lines) including the ECCD profile predicted by TORBEAM in the current density for ASDEX Upgrade shot 28215 at  $t = 3.5$  s (ECCD at  $q = 1$  giving optimal sawtooth destabilization) and  $t = 4.5$  s (ECCD well outside  $q = 1$ ). The vertical lines on the local shear profile show the positions of the  $q = 1$  surface. The ECCD only affects the current density,  $q$ , and shear profiles in a narrow local region at the deposition location.

equilibrium reconstruction. Conversely, when the ECCD resonance is outside  $q = 1$  at  $t = 4.5$  s, the local magnetic shear at  $q = 1$  is barely affected.

As well as the change in the magnetic shear, the fast ion distribution is also required to assess the change in the

potential energy of the internal kink mode. In order to retain the complex dependence of the fast ion population upon pitch angle, energy and radius, the full Monte Carlo distribution function is employed in the drift kinetic modelling detailed below. The effect of the fast ions on internal kink stability

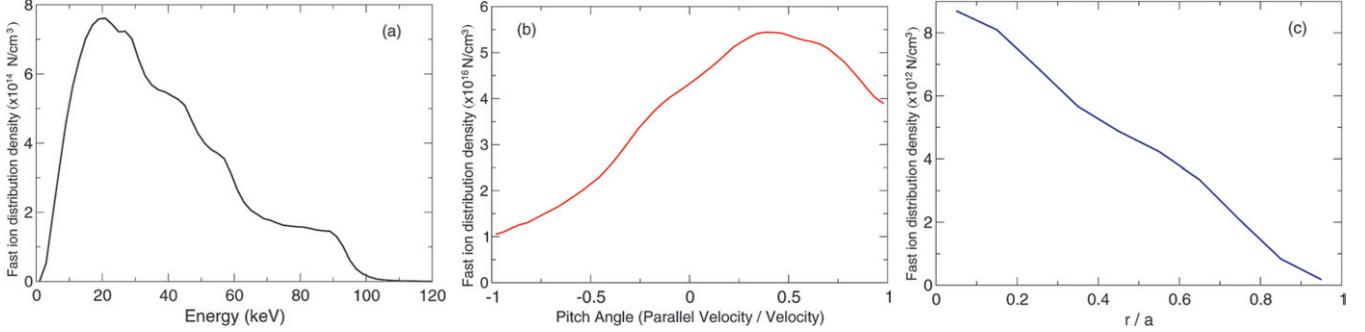


**Figure 7.** The fast ion distribution density for ASDEX Upgrade discharge 28219 as calculated by TRANSP at 3.5 s averaged over 20 ms as a function of (a) particle energy, (b) pitch angle ( $= v_{\parallel}/v$ ) and (c) radius, where for each plotted variable the fast ion density is integrated over the other two variables.

is analysed using the drift kinetic HAGIS code [49]. HAGIS simulates the interaction between the perturbation taken from MISHKA-F [50] and the energetic particle distribution taken from the TRANSP code [51]. Figure 7 shows the neutral beam fast ion density calculated by TRANSP as a function of energy, pitch angle and radius when averaged over the other variables in the poloidal plane (ie the energy dependence is integrated across all pitch angles and radii). The fast ions are peaked near the axis, which is where the NBI is aimed and the ICRH resonance is deposited when  $B_T = 2.5$  T. In the shot considered here, the energetic particle distribution is peaked around  $\lambda = v_{\parallel}/v \sim 0.5$  and is approximately Gaussian with respect to their pitch angle at high energies, although at lower energy, the beam ion population tends to isotropy. The ICRH distribution function is assumed to be bi-Maxwellian in form, as in [52,53]:

$$f_h^{\text{ICRH}} = \left( \frac{m}{2\pi} \right)^{3/2} \frac{n_c(r)}{T_{\perp}(r)T_{\parallel}^{1/2}(r)} \times \exp \left[ -\frac{\mu B_c}{T_{\perp}(r)} - \frac{|\mathcal{E} - \mu B_c|}{T_{\parallel}(r)} \right] \quad (4)$$

where the particle energy  $\mathcal{E} = mv^2/2$ , the magnetic moment  $\mu = mv_{\perp}^2/B$ ,  $\parallel$  and  $\perp$  represent the components parallel and perpendicular to the magnetic field respectively,  $B_c$  is the critical field strength at the resonance and  $n_c$  is the local density evaluated at  $B = B_c$ .

The effect of changing the local magnetic shear is assessed by calculating the change in the potential energy of the  $n = 1$  internal kink mode which enters into the critical magnetic shear required for a sawtooth to occur, as given by equation (1). The fluid drive for the mode,  $\delta W_f$  is calculated by MISHKA-F, whilst the stabilizing effect from the core fast ions,  $\delta W_h$ , resulting from the NBI is calculated using HAGIS. Figure 8 shows the sawtooth period for ASDEX Upgrade discharge 28215 (where the ECCD deposition is swept from inside to outside  $q = 1$  as shown in figure 3) as a function of  $\rho_{\text{res}} - \rho_1$ . This is compared to the change in the potential energy of the kink mode as calculated with MISHKA and HAGIS for the fluid drive and energetic particle response respectively. When the EC is deposited just inside  $\rho_1$ , the fluid drive for the  $n = m = 1$  internal kink is maximized because the EC driven current increases both the magnetic shear and  $r_1$ . As well as driving the internal kink, the stabilizing effect of the fast ions is

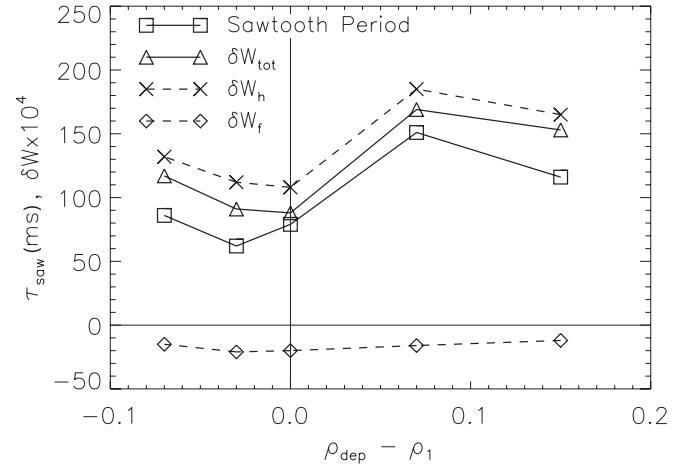

**Figure 8.** The sawtooth period as a function of the peak deposition location of ECCD calculated by TORBEAM with respect to the inversion radius in ASDEX Upgrade shot 28215. The sawtooth period dependence is mirrored by the change in the potential energy of the internal kink mode,  $\delta W_{\text{tot}}$ . This is primarily caused by the change in local shear affecting the potential energy arising from fast ions as calculated by HAGIS,  $\delta W_h$ .

diminished due to the normalization of  $\delta \hat{W}_h$  in equation (1) by the local magnetic shear. Here the  $\delta \hat{W}_h$  is calculated using the fast ion distribution from discharge 28219 throughout, as shown in figure 7. Whilst linear stability calculations cannot be used to infer the sawtooth period, which is naturally dominated by nonlinear processes, it is indicative of sawtooth stability. Furthermore, the fact that the change in potential energy of the internal kink,  $\delta W_{\text{tot}}$ , correlates strongly with the sawtooth period gives confidence that the dominant physics is captured in the modelling. This shows that whilst only a small ECCD power ( $\sim 1$  MW) is applied, this provides a significant change in the local magnetic shear near  $q = 1$  (though a negligible change in the total current), which can counteract the stabilizing influence of the population of energetic particles born as a result of 15 MW of injected power.

## 5. Discussion and conclusions

The ELMy H-mode baseline scenario in ITER is expected to experience sawtooth oscillations, and may even require

such core reconnection events to alleviate core impurity accumulation. The fusion born  $\alpha$  particles together with fast ions arising from the neutral beam injection and ion cyclotron resonance heating are expected to lengthen the sawtooth periods, potentially to the order of 100 s [2, 54, 55]. Empirical scaling suggests that such long sawteeth are likely to trigger deleterious NTMs [6] and therefore active sawtooth control is required. Whilst NTM suppression is planned for ITER, direct avoidance by sawtooth control is preferable in order to optimize the cost of electricity in a steady-state fusion power plant, since as well as heating the core plasma when ECCD is applied inside  $q = 1$  for sawtooth control, the ECCD efficiency is far greater near the core than near the  $q = 2$  surface. The use of current drive for controlling sawtooth periods is robust and widely demonstrated, but there is little evidence of its use in the presence of significant populations of fast ions which result in a large positive  $\delta W_h$ , which coupled with the small ion Larmor radius, makes the criterion for the necessary magnetic shear challenging (see equation (1)). The results presented here show that not only is ECCD control possible using very low levels of driven current in the presence of fast ions, but that it can predicate much higher performance (both in normalized pressure,  $\beta_N$ , and energy confinement enhancement factor,  $H_{98,y_2}$ ) than forecast to achieve  $Q = 10$  in ITER whilst still avoiding NTMs. Furthermore, sawtooth control can be achieved without strong sensitivity to the deposition position of the peak of the ECCD, provided it is inside  $q = 1$ , making the real-time feedback control requirements less stringent than for direct NTM suppression. Only a low level of ECCD power was required to avoid NTMs; in these ASDEX Upgrade plasmas, just 0.8 MW of ECCD was sufficient to avoid NTM triggering up to  $\beta_N = 3.0$  with 14 MW of auxiliary heating power. The fact that a modest level of injected EC power could result in such a dramatic change in the sawtooth behaviour, despite the strong stabilizing contribution of the energetic ions, suggests that the destabilizing effect of increased local magnetic shear may be stronger than [2] suggests; this is the case, for instance, in the stability criteria for the drift tearing mode in [14]. Whilst these energetic particles represent up to approximately 20% of the plasma pressure, this is still much less than expected in ITER, and definitive demonstration of the effectiveness of ECCD does require a larger fast ion fraction in future studies.

## Acknowledgments

The authors would like to thank Dr V Bobkov for operation of the ICRH system. This work was partly funded by the RCUK Energy Programme under grant EP/I501045, the European Communities under the contract of Association between EURATOM and CCFE. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

## References

- [1] Von Goeler S, Stodiek W and Sauthoff N 1974 *Phys. Rev. Lett.* **33** 1201
- [2] Porcelli F, Boucher D and Rosenbluth M 1996 *Plasma Phys. Control. Fusion* **38** 2163
- [3] Chapman I T et al 2007 *Plasma Phys. Control. Fusion* **49** B385
- [4] Hu B, Betti R and Manickam J 2006 *Phys. Plasmas* **13** 112505
- [5] Chapman I T et al 2011 *Plasma Phys. Control. Fusion* **53** 124003
- [6] Chapman I T et al 2010 *Nucl. Fusion* **50** 102001
- [7] Buttery R J et al 2004 *Nucl. Fusion* **44** 678
- [8] Porcelli F 1991 *Plasma Phys. Control. Fusion* **33** 1601
- [9] Graves J P, Chapman I T, Coda S, Eriksson L G and Johnson T 2009 *Phys. Rev. Lett.* **102** 065005
- [10] Graves J P, Sauter O and Gorelenkov N 2003 *Phys. Plasmas* **10** 1034
- [11] Kruskal M and Oberman C 1958 *Phys. Fluids* **1** 275
- [12] Fogaccia G and Romanelli F 1995 *Phys. Plasmas* **2** 227
- [13] Sauter O et al 1998 *Theory of Fusion Plasmas, Proc Joint Varenna-Lausanne International Workshop (Varenna, Italy)* (New York: AIP) p 403
- [14] Zocco A, Connor J W and Hastie R J 2013 Sawtooth period scaling *Plasma Phys. Control. Fusion* in press
- [15] Bussac M N et al 1975 *Phys. Rev. Lett.* **35** 1638
- [16] Ahkaev V V et al 1995 *Nucl. Fusion* **35** 369
- [17] Mück A, Goodman T P, Maraschek M, Pereverzev G, Ryter F and Zohm H 2005 *Plasma Phys. Control. Fusion* **47** 1633
- [18] Angioni C, Goodman T, Henderson M and Sauter O 2003 *Nucl. Fusion* **43** 455
- [19] Ikeda Y et al 2002 *Nucl. Fusion* **42** 375
- [20] Pinsker R I et al 2003 *Bull. Am. Phys. Soc.* **48** 128
- [21] Westerhof E et al 2003 *Nucl. Fusion* **43** 1371
- [22] Lennholm M et al 2007 *17th Topical Conf. on Radio Frequency Power in Plasmas (Clearwater, FL)* vol 933 p 401
- [23] Henderson M et al 2007 *Fusion Eng. Des.* **82** 454
- [24] Darbos C et al 2009 Radio Frequency Power in Plasmas *Proc. 18th Topical Conf. (Gent)* vol 1187 p 531
- [25] Chapman I T 2011 *Plasma Phys. Control. Fusion* **53** 003001
- [26] Maraschek M et al 2005 *Nucl. Fusion* **45** 1369
- [27] Sauter O et al 2010 *Plasma Phys. Control. Fusion* **52** 025002
- [28] Chapman I T et al 2012 Power requirements for electron cyclotron current drive and ion cyclotron resonance heating for sawtooth control in ITER *Nucl. Fusion* in press
- [29] Lennholm M et al 2009 *Phys. Rev. Lett.* **102** 115004
- [30] Lennholm M et al 2009 *Fusion Sci. Technol.* **55** 45
- [31] Iguchi V et al 2011 *Plasma Phys. Control. Fusion* **53** 022002
- [32] Chapman I T et al 2012 *Nucl. Fusion* **52** 063006
- [33] Isayama A et al 2002 *J. Plasma Fusion Res. Ser.* **5** 324
- [34] Herrmann A and Gruber O 2003 *Fusion Sci. Technol.* **44** 569
- [35] Park W and Monticello D 1990 *Nucl. Fusion* **30** 2413
- [36] Budny R V 2002 *Nucl. Fusion* **42** 1383
- [37] Asunta O et al [http://users.tkk.fi/~tkurki/RIPLOS.FR\\_Nov2008.pdf](http://users.tkk.fi/~tkurki/RIPLOS.FR_Nov2008.pdf)
- [38] Poli E, Peeters A G and Pereverzev G V 2001 *Comput. Phys. Commun.* **136** 90
- [39] Chapman I T, Hender T C, Saarelma S, Sharapov S E, Akers R J and Conway N J 2006 *Nucl. Fusion* **46** 1009
- [40] Chapman I T, Pinches S D, Koslowski H R, Liang Y, Kramer-Flecken A and de Bock M 2008 *Nucl. Fusion* **48** 035004
- [41] Chapman I T et al 2007 *Phys. Plasmas* **14** 070703
- [42] Chapman I T et al 2008 *Plasma Phys. Control. Fusion* **50** 045006
- [43] Chapman I T et al 2009 *Nucl. Fusion* **49** 035006
- [44] Chapman I T et al 2009 *Phys. Plasmas* **16** 072506
- [45] Huysmans G T A et al 1991 *Proc. CP90 Conf. on Computer Physics (Amsterdam, The Netherlands)* p 371
- [46] McCarthy P J 2012 *Plasma Phys. Control. Fusion* **54** 015100
- [47] Nadeem S et al 2001 *Phys. Plasmas* **8** 4375
- [48] McCarthy P J and the ASDEX Upgrade Team 2013 Practical

- expressions for local magnetic shear, normal and geodesic curvatures in an axisymmetric plasma equilibrium of arbitrary cross-section *Plasma Phys. Control. Fusion* submitted
- [49] Pinches S D *et al* 1998 *Comput. Phys. Commun.* **111** 133
- [50] Chapman I T, Huysmans G T A, Mikhailovskii A B and Sharapov S E 2006 *Phys. Plasmas* **13** 062511
- [51] Budny R V *et al* 1992 *Nucl. Fusion* **32** 429
- [52] Graves J P, Cooper W A, Coda S, Eriksson L G and Johnson T 2006 *Theory of Fusion Plasmas, Joint Varenna-Lausanne International Workshop* (Varenna) p 350
- [53] Dendy R O *et al* 1995 *Phys. Plasmas* **2** 1623
- [54] Jardin S C, Bell M G and Pomphrey N 1993 *Nucl. Fusion* **33** 371
- [55] Onjun T and Pianroj Y 2009 *Nucl. Fusion* **49** 075003