

UKAEA-CCFE-CP(20)94

Siobhan Smith, Stanislas Pamela, Howard Wilson,
Guido Huijsmans

Numerical Simulations of Edge Localised Modes in MAST-U Plasmas

This document is intended for publication in the open literature. It is made available on the understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the UKAEA Publications Officer, Culham Science Centre, Building K1/O/83, Abingdon, Oxfordshire, OX14 3DB, UK.

Enquiries about copyright and reproduction should in the first instance be addressed to the UKAEA Publications Officer, Culham Science Centre, Building K1/O/83 Abingdon, Oxfordshire, OX14 3DB, UK. The United Kingdom Atomic Energy Authority is the copyright holder.

The contents of this document and all other UKAEA Preprints, Reports and Conference Papers are available to view online free at scientific-publications.ukaea.uk/

Numerical Simulations of Edge Localised Modes in MAST-U Plasmas

Siobhan Smith, Stanislas Pamela, Howard Wilson, Guido
Huijsmans

Numerical simulations of edge localised modes in MAST-U plasmas

S.F. Smith^{1,2}, S.J.P. Pamela¹, A.J. Thornton¹, D. Moulton¹, M. Hölzl³, H.R. Wilson^{1,2},
G.T.A. Huijsmans^{4,5}, MST1 Team*

¹ CCFE, Culham Science Centre, Abingdon, UK

² York Plasma Institute, Department of Physics, University of York, York, U

³ Max-Planck-Institute for Plasmaphysics, EURATOM Association, Garching, Germany

⁴ CEA, IRFM, F-13108 Saint-Paul-lez-Durance, France

⁵ Eindhoven University of Technology, Eindhoven, The Netherlands

* Author list H.Meyer et al, Nucl. Fusion 57 102014 (2017)

Introduction

Edge localised modes (ELMs) are magneto-hydrodynamic (MHD) instabilities that drive filamentary plasma eruptions in high confinement tokamak discharges [1]. In future fusion reactors ELM heat fluxes will be reduced to ensure durability of divertor materials [2]; peak heat fluxes from uncontrolled type-I ELMs are predicted to damage the ITER Tungsten divertor plates so gaining an improved understanding of ELMs is important. The MAST-U tokamak will test a new divertor configuration, the Super-X, as a possible solution to lower the target heat fluxes. Additional PF coils in the divertor region will control the strike point radius length (R), at larger R the contact area of the plasma increases, which decreases the target heat flux. Flux expansion in the chamber is also possible, further increasing the neutral interaction area [3]. The closed divertor design of the Super-X allows for retention of neutrals [3], this is important for attaining detachment whilst keeping impurities low in the core plasma. Plasma detachment can occur as the ion temperature is reduced due to the ion-neutral interaction. The characteristics of ELM divertor heat fluxes in the Super-X are unknown, particularly it is not known if the ELMs will burn through the detachment front. The following presents initial simulation results of ELM dynamics in MAST-U plasmas using the nonlinear MHD code JOREK [4], a brief overview of the model is given. Initial results including the fluid neutrals model are presented.

JOREK and simulation set-up

JOREK, the nonlinear MHD code is being developed to establish quantitative validation against current experiments [5]. JOREK contains a reduced MHD model, the equations for this model are in [5] where physical variables of perpendicular and parallel velocity, poloidal flux, density and temperature are evolved in time. The JOREK model has been extended for neutral fluid simulations, previously used for MGI and disruption simulations [6]. An extra equation

for the neutral density has been included in addition to terms for ionisation and recombination rates and it is assumed the neutrals are only diffusive; equations are in [6]

The MAST-U equilibria are generated using pressure profiles taken from a typical H-mode type-I ELM MAST plasma, these are input to JOREK where a 2-D grid of finite elements is generated. This grid has a higher resolution in the plasma edge where ELMs occur and includes the entire vacuum domain extending to the MAST-U wall, to include wall boundary conditions. A Fourier decomposition is applied in the toroidal direction within JOREK. The boundary conditions set during the simulations are Neumann for density and temperature, Bohm boundary conditions for parallel velocity and Dirichlet for all other variables. The neutrals have reflective boundary conditions set by a coefficient ($C = 0.5$). This boundary condition is defined by the ion flux to the boundary, which is convected with the sound speed, and is reflected back as diffusive neutrals. The MHD parameters used are resistivity ($\eta = 4.0 \times 10^{-6} [\Omega \text{ m}]$), viscosity ($\mu_{\perp} = 4.0 \times 10^{-6}$ and $\mu_{\parallel} = 4.0 \times 10^{-5} [\text{kg m s}^{-1}]$), particle diffusivity ($D_{\perp} = 4.0 [\text{m}^2 \text{ s}^{-1}]$) and thermal diffusivity ($\kappa_{\parallel} = 8.0 \times 10^2$ and $\kappa_{\perp} = 5.0 \times 10^{-8}$). In the simulations where the neutrals model is used $\kappa_{\perp} = 2.0 \times 10^{-7}$ and the neutral diffusivity is $D_n = 2.0 \times 10^2 [\text{m}^2 \text{ s}^{-1}]$, tests will be done for other values of D_n as a realistic value of D_n is unknown [6].

ELM simulations for MAST-U plasmas

Starting with the equilibrium generated in JOREK the simulation is run with equilibrium flows only ($n=0$) until a quasi-steady state is reached, then a perturbation is introduced. In these results a toroidal mode number of $n=20$ has been used, if it is an unstable scenario a linear growth in energy of the system occurs, eventually reaching a nonlinear phase where the ELM crash occurs. During the nonlinear phase the energy and particle losses are determined and the heat flux to the boundary is calculated, these values can be used for future comparisons to experimental data. The aim is to investigate the significance of the Super-X on heat fluxes during an ELM. A scan in radius (R) is done, in fig. 1a) the separatrix for both the Super-X and conventional divertor are shown with connection lengths at 1.5 m and 0.7 m respectively.

The steep pressure profile (fig. 1b)), used as an input for the H-mode plasma, collapses as expected during the Super-X ELM simulation; as this occurs filamentary structures of high density erupt from the plasma edge (fig. 1c)). Particles are lost as the pedestal collapses, the loss is $\sim 17\%$ calculated from volume integrals of the density in the pedestal. The temperature in the divertor increases during the ELM crash as energy is lost, the pedestal energy loss is calculated to be $\sim 24\%$. The heat flux to the lower divertor targets is calculated and the evolution of this is in fig. 2c) and d) for the inner and outer targets respectively. The peak heat flux is 3 MW/m^2 on the inner target (labeled 1 in fig. 1a)) and 0.1 MW/m^2 on the outer extended leg target (labeled

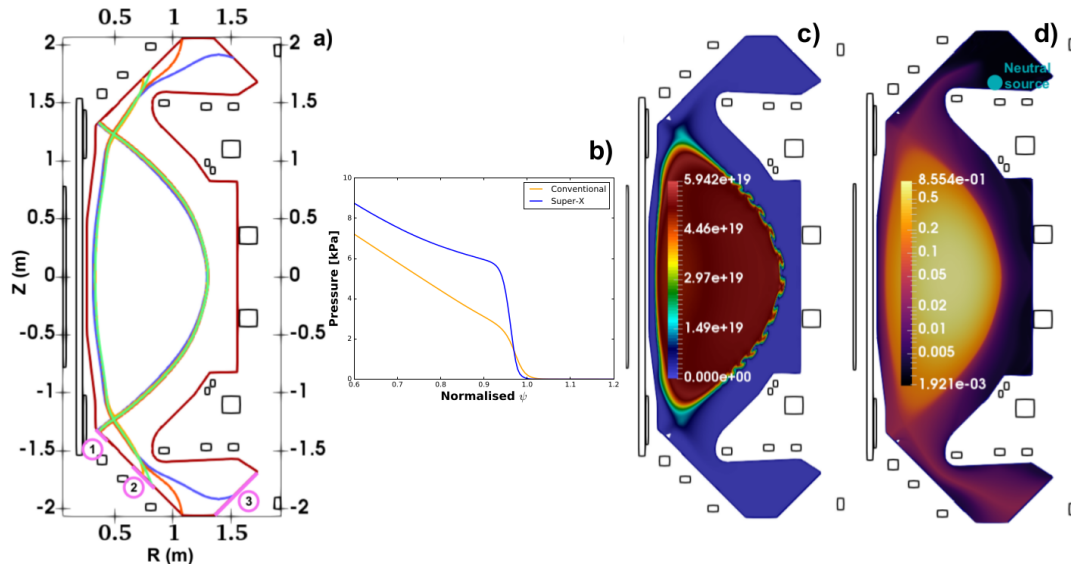


Figure 1: a) The separatrix for the conventional divertor configuration (yellow) to the super-X (blue). b) Pressure profiles for the Super-X and conventional divertor configurations. c) Density (m^{-3}) during an ELM. d) Temperature (keV) during a simulation with neutrals.

3 in fig. 1a)). The peak heat flux to the outer target is an order of magnitude less than the typical peak heat flux obtained from previous MAST experiments with a conventional divertor [7].

Comparisons are made to a simulation of a MAST-U equilibrium with a conventional divertor leg. The initial conventional divertor equilibrium is not the same as the Super-X case, the pressure profiles for each are given in fig.1b). The core pressure and pressure profile are lower with a shallower pedestal for the conventional case indicating a smaller ballooning mode. As expected a smaller ELM crash is observed with a pedestal energy loss of $\sim 18\%$ and a similar particle loss as the Super-X case. The heat flux pattern is in fig.2a) and b) for the inner and outer divertor targets respectively. The peak heat flux to the inner target is similar to the Super-X case and to the outer target (labeled 2 in fig. 1a)) is $\sim 5 \text{ MW/m}^2$. The heat flux results to the outer target are an order of magnitude larger for the conventional divertor compared to the Super-X, even though the plasma pressure and ELM size is larger in the latter case.

The neutral fluid model allows a more thorough investigation of the effect of ELMs in the MAST-U tokamak where neutrals will be important; lowering the target heat flux as detachment is achieved. The simulation runs as previously stated but before the perturbations are introduced $\sim 6 \text{ ms}$ are allowed for the neutrals to diffuse. Fig.1d) is an example of the simulation results from the neutrals model (with $n=0$), neutrals are injected into the upper divertor using a source indicated in the figure. Fig. 1d) indicates detachment is achieved in the upper divertor where the temperature is below 5 eV, whilst the lower divertor is attached. This test shows the model

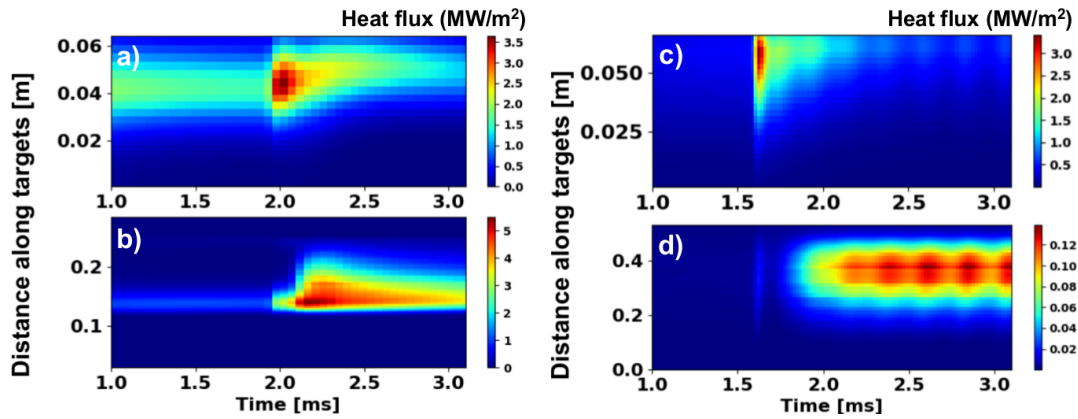


Figure 2: Heat flux on the lower divertor targets during the evolution of an ELM a) inner and b) outer target for the conventional divertor configuration, c) inner and d) outer target for the Super-X configuration.

is capable of achieving detachment when a neutral source is included, further work will include a full ELM simulation with the outer divertors detached, to investigate if the plasma stays detached during the higher parallel flux of energy when an ELM occurs.

Conclusion

Simulations have been achieved investigating the effect of ELMs in the MAST-U Super-X divertor. The initial results show reduced heat fluxes to the extended leg targets, even where the ELM crash is larger, but with a similar size to previous MAST experiments. Further simulations will use the same initial equilibria for the two scenarios where the only difference will be the connection length and flux expansion. Initial simulations with the neutrals model in JOREK show detachment of the plasma in the divertor when neutrals are being injected into the chamber and future work will include full ELM simulations with the neutrals model.

Acknowledgements

Publications with an element of EUROfusion Consortium work have the acknowledgement: "This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014-2018 under grant agreement No 633053 and from the RCUK Energy Programme [grant number EP/P012450/1]. To obtain further information on the data and models underlying this paper please contact PublicationsManager@cfe.ac.uk*. The views and opinions expressed herein do not necessarily reflect those of the European Commission. EPSRC CDT grant number EP/L01663X/1.

References

- [1] A. W. Leonard, Phys. Plasmas 21, 090501 (2014)
- [2] R.A. Pitts et al., Journal of Nuclear Materials 438, S48-S56, (2013)
- [3] I. Katramados et al. Fusion Eng. Des. 86 (2011) 1595-1598
- [4] G. T. A. Huysmans and O. Czarny, Nucl. Fusion 47 659-666 (2007)
- [5] S.J.P. Pamela et al., Plasma Phys. Control. Fusion 53 054014 (2011)
- [6] A. Fil et al., Physics of Plasmas 22, 062509 (2015)
- [7] A.J. Thornton et al. Journal of Nuclear Materials 438 (2013) S199-S202