

UKAEA-CCFE-CP(23)01

The JET contributors* (presented by J. Mailloux)

Overview of JET results for optimising ITER operation

This document is intended for publication in the open literature. It is made available on the understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the UKAEA Publications Officer, Culham Science Centre, Building K1/O/83, Abingdon, Oxfordshire, OX14 3DB, UK.

Enquiries about copyright and reproduction should in the first instance be addressed to the UKAEA Publications Officer, Culham Science Centre, Building K1/O/83 Abingdon, Oxfordshire, OX14 3DB, UK. The United Kingdom Atomic Energy Authority is the copyright holder.

The contents of this document and all other UKAEA Preprints, Reports and Conference Papers are available to view online free at scientific-publications.ukaea.uk/

Overview of JET results for optimising ITER operation

The JET contributors* (presented by J. Mailloux)

Overview of JET results for optimising ITER operation

J. Mailloux⁹³, P. Batistoni^x, M. Rubel^x, L. Horton^x, L. Baylor^x, N. Bonanomi^x,
D. Bonfiglio^x, D. Borodin^x, S. Brezinsek^x, C. D. Challis^x, E. de la Luna^x, T. Dittmar^x,
D. Douai^x, R. Dumont^x, A. Field^x, L. Frassinetti^x, J. Garcia^x, L. Garzotti^x, Z. Ghani^x, C.
Giroud^x, J. Hillesheim^x, A. Huber^x, S. Jachmich^x, Y. Kazakov^x, D. King^x, S. Knipe^x, B.
Lomanowski^x, C. F. Maggi^x, S. Moon^x, E. Nardon^x, F. Nave^x, M. Nocente^x, L. Packer^x,
P. Lomas^x, E. Pawelec^x, A. Peacock^x, F. Rimini^x, U. Sheikh^x, E. Solano^x, T. Tala^x,
D. van Eester^x, T. Wauters^x, N. Abid⁹³, K. Abraham⁹³, P. Abreu⁵⁴, O. Adabonyan⁹³,
P. Adrich⁶⁹, V. Afanasev⁵⁵, M. Afzal⁹³, T. Ahlgren¹⁰⁶, L. Aho-Mantila¹¹⁵, N. Aiba⁷¹, M.
Airila¹¹⁵, M. Akhtar⁹³, R. Albanese¹², M. Alderson-Martin⁹³, D. Alegre⁶⁰, S.
Aleiferis⁷⁴, A.G. Alekseev⁷⁵, E. Alessi⁴⁷, P. Aleynikov⁵⁷, M. Ali⁹³, M. Allinson⁹³, B.
Alper⁹³, E. Alves⁵⁴, G. Ambrosino¹², R. Ambrosino¹², V. Amosov⁹¹, E. Andersson
Sundén¹⁹, P. Andrew⁵⁷, B.M. Angelini²⁴, C. Angioni⁶⁵, I. Antoniou⁹³, L.C. Appel⁹³, C.
Appelbee⁹³, S. Aria⁹³, M. Ariola¹², G. Artaserse²⁴, W. Arter⁹³, V. Artigues⁶⁵, N.
Asakura⁷¹, A. Ash⁹³, N. Ashikawa⁷⁰, V. Aslanyan⁶⁸, M. Astrain⁹⁶, O. Asztalos⁸, D.
Auld⁹³, F. Auriemma¹³, Y. Austin⁹³, L. Avotina¹⁰⁸, E. Aymerich¹⁶, A. Baciero⁶⁰, F.
Bairaktaris⁷³, J. Balbin⁷, L. Balbinot¹³, I. Balboa⁹³, M. Balden⁶⁵, N. Balshaw⁹³, C.
Balshaw⁹³, V.K. Bandaru⁶⁵, J. Banks⁹³, Yu.F. Baranov⁹³, C. Barcellona²⁷, A.
Barnard⁹³, M. Barnard⁹³, R. Barnsley⁵⁷, A. Barth⁹³, M. Baruzzo²⁴, S. Barwell⁹³, M.
Bassan⁵⁷, A. Batista⁵⁴, P. Batistoni²⁴, L. Baumane¹⁰⁸, B. Bauvir⁵⁷, L. Baylor⁷⁶, P.S.
Beaumont⁹³, D. Beckett⁹³, A. Begolli⁹³, M. Beidler⁷⁶, N. Bekris^{32, 58}, M.
Beldishevski⁹³, E. Belli⁴¹, F. Belli²⁴, É. Belonohy⁹³, M. Ben Yaala²², J. Benayas⁹³,
J. Bentley⁹³, H. Bergsäter⁴⁰, J. Bernardo⁵⁴, M. Bernert⁶⁵, M. Berry⁹³, L. Bertalot⁵⁷,
H. Betar⁴⁵, M. Beurskens⁶⁶, S. Bickerton⁹³, B. Bieg⁶⁴, J. Bielecki⁴⁸, A. Bierwage⁷¹,
T. Biewer⁷⁶, R. Bilato⁶⁵, P. Bílková⁵¹, G. Birkenmeier⁶⁵, H. Bishop⁹³, J.P.S. Bizarro⁵⁴,
J. Blackburn⁹³, P. Blanchard²⁹, P. Blatchford⁹³, V. Bobkov⁶⁵, A. Boboc⁹³, P. Bohm⁵¹,
T. Bohm¹¹⁴, I. Bolshakova⁶³, T. Bolzonella¹³, N. Bonanomi⁶⁵, D. BonFiglio¹³,
X. Bonnin⁵⁷, P. BonoFiglio⁷⁹, S. Boock⁹³, A. Booth⁹³, J. Booth⁹³, D. Borba^{32, 54},
D. Borodin³⁷, I. Borodkina^{37, 51}, C. Boulbe¹⁰⁰, C. Bourdelle⁷, M. Bowden⁹³, K. Boyd⁹³,
I. Božičević Mihalić⁸¹, S.C. Bradnam⁹³, V. Braic⁸⁹, L. Brandt⁶⁷, R. Bravanec³⁸,
B. Breizman¹¹¹, A. Brett⁹³, S. Brezinsek³⁷, M. Brix⁹³, K. Bromley⁹³, B. Brown⁹³,
D. Brunetti^{47, 93}, R. Buckingham⁹³, M. Buckley⁹³, R. Budny, J. Buermans⁶¹,
H. Bufferand⁷, P. Buratti²⁴, A. Burgess⁹³, A. Buscarino²⁷, A. Busse⁹³, D. Butcher⁹³,
E. de la Cal⁶⁰, G. Calabrò¹¹³, L. Calacci⁹⁸, R. Calado⁵⁴, Y. Camenen³, G. Canal⁵³,
B. Cannas¹⁶, M. Cappelli²⁴, S. Carcangiu¹⁶, P. Card⁹³, A. Cardinali²⁴, P. Carman⁹³,
D. Carnevale⁹⁸, M. Carr⁹³, D. Carralero⁶⁰, L. Carraro¹³, I.S. Carvalho⁵⁴, P. Carvalho⁵⁴,
I. Casiraghi¹⁰², F.J. Casson⁹³, C. Castaldo²⁴, N. Catarino⁵⁴, F. Causa⁴⁷, M. Cavedon⁶⁵,
M. Cecconello¹⁹, C.D. Challis⁹³, B. Chamberlain⁹³, C.S. Chang⁷⁹, A. Chankin⁶⁵,
B. Chapman^{9, 93}, M. Chernyshova⁵⁰, A. Chiariello¹², P. Chmielewski⁵⁰,
A. Chomiczewska⁵⁰, L. Chone¹, G. Ciruolo⁷, D. Ciric⁹³, J. Citrin³⁶, Ł. Ciupinski¹¹⁶,

M. Clark⁹³, R. Clarkson⁹³, C. Clements⁹³, M. Cleverly⁹³, J.P. Coad⁹³, P. Coates⁹³,
A. Cobalt⁹³, V. Coccorese¹², R. Coelho⁵⁴, J.W. Coenen³⁷, I.H. Coffey⁵, A. Colangeli²⁴,
L. Colas⁷, C. Collins⁷⁶, J. Collins⁹³, S. Collins⁹³, D. Conka¹⁰⁸, S. Conroy¹⁹, B. Conway⁹³,
N.J. Conway⁹³, D. Coombs⁹³, P. Cooper⁹³, S. Cooper⁹³, C. Corradino²⁷,
G. Corrigan⁹³, D. Coster⁶⁵, P. Cox⁹³, T. Craciunescu⁸⁸, S. Cramp⁹³, C. Crapper⁹³,
D. Craven⁹³, R. Craven⁹³, M. Cialesi Esposito⁶⁷, G. Croci¹⁰², D. Croft⁹³, A. Croitoru⁸⁸,
K. Crombé^{15, 61}, T. Cronin⁹³, N. Cruz⁵⁴, C. Crystal⁴¹, G. Cseh⁸, A. Cufar⁸⁴, A. Cullen⁹³,
M. Curuia⁸⁷, T. Czarski⁵⁰, H. Dabirikhah⁹³, A. Dal Molin¹⁰², E. Dale⁹³, P. Dalglish⁹³,
S. Dalley⁹³, J. Dankowski⁴⁸, P. David⁶⁵, S. Davies⁹³, A. Davies⁹³, G. Davis⁹³,
K. Dawson⁹³, S. Dawson⁹³, I.E. Day⁹³, M. De Bock⁵⁷, G. De Temmerman⁵⁷,
G. De Tommasi¹², K. Deakin⁹³, J. Deane⁹³, R. Dejarnac⁵¹, D. Del Sarto⁴⁵, E. Delabie⁷⁶,
D. Del-Castillo-Negrete⁷⁶, A. Dempsey²⁸, R.O. Dendy^{9, 93}, P. Devynck⁷, A. Di Siena⁶⁵,
C. Di Troia²⁴, T. Dickson⁹³, P. Dinca⁸⁸, T. Dittmar³⁷, J. Dobrashian⁹³, R.P. Doerner¹⁰³,
A.J.H. Donne³¹, S. Dorling⁹³, S. Dormido-Canto⁹², D. Douai⁷, S. Dowson⁹³,
R. Doyle²⁸, M. Dreval⁷², P. Drewelow⁶⁶, P. Drews³⁷, G. Drummond⁹³,
Ph. Duckworth⁵⁷, H. Dudding^{93, 117}, R. Dumont⁷, P. Dumortier⁶¹, D. Dunai⁸,
T. Dunatov⁸¹, M. Dunne⁶⁵, I. Đuran⁵¹, F. Durodié⁶¹, R. Dux⁶⁵, A. Dvornova⁷,
R. Eastham⁹³, J. Edwards⁹³, Th. Eich⁶⁵, A. Eichorn⁹³, N. Eidietis⁴¹, A. Eksaeva³⁷,
H. El Haroun⁹³, G. Ellwood⁵⁷, C. Elsmore⁹³, O. Embreus²⁰, S. Emery⁹³, G. Ericsson¹⁹,
B. Eriksson¹⁹, F. Eriksson²³, J. Eriksson¹⁹, L.G. Eriksson³³, S. Ertmer³⁷, S. Esquembri⁹⁶,
A.L. Esquisabel¹¹⁰, T. Estrada⁶⁰, G. Evans⁹³, S. Evans⁹³, E. Fable⁶⁵, D. Fagan⁹³,
M. Faitsch⁶⁵, M. Falessi²⁴, A. Fanni¹⁶, A. Farahani⁹³, I. Farquhar⁹³, A. Fasoli²⁹,
B. Faueras¹⁰⁰, S. Fazinić⁸¹, F. Felici²⁹, R. Felton⁹³, A. Fernades⁵⁴, H. Fernandes⁵⁴,
J. Ferrand⁹³, D.R. Ferreira⁵⁴, J. Ferreira⁵⁴, G. Ferrò⁹⁸, J. Fessey⁹³, O. Ficker⁵¹,
A.R. Field⁹³, A. Figueiredo⁵⁴, J. Figueiredo^{32, 54}, A. Fil⁹³, N. Fil^{68, 93}, P. Finburg⁹³,
D. Fiorucci⁷³, U. Fischer⁵⁸, G. Fishpool⁹³, L. Fittill⁹³, M. Fitzgerald⁹³, D. Flammini²⁴,
J. Flanagan⁹³, K. Flinders⁹³, S. Foley⁹³, N. Fonnesu²⁴, M. Fontana²⁹,
J.M. Fontdecaba⁶⁰, S. Forbes⁹³, A. Formisano¹², T. Fornal⁵⁰, L. Fortuna²⁷,
E. Fortuna-Zalesna¹¹⁶, M. Fortune⁹³, C. Fowler⁹³, E. Fransson²³, L. Frassinetti⁴⁰,
M. Freisinger³⁷, R. Fresa¹², R. Fridström⁴⁰, D. Frigione⁹⁸, T. Fülöp²⁰, M. Furseman⁹³,
V. Fusco²⁴, S. Futatani⁹⁹, D. Gadariya⁶⁰, K. Gál³¹, D. Galassi²⁹, K. Gałazka⁵⁰,
S. Galeani⁹⁸, D. Gallart⁶, R. Galvão⁵³, Y. Gao³⁷, J. Garcia⁷, M. García-Muñoz⁹⁵,
M. Gardener⁹³, L. Garzotti⁹³, J. Gaspar², R. Gatto²⁶, P. Gaudio⁹⁸, D. Gear⁹³,
T. Gebhart⁷⁶, S. Gee⁹³, M. Gelfusa⁹⁸, R. George⁹³, S.N. Gerasimov⁹³, G. Gervasini⁴⁷,
M. Gethins⁹³, Z. Ghani⁹³, M. Gherendi⁸⁸, F. Ghezzi⁴⁷, J.C. Giacalone⁷,
L. Giacomelli⁴⁷, G. Giacometti³, C. Gibson⁹³, L. Gil⁵⁴, A. Gillgren²³, D. Gin⁵⁵,
E. Giovannozzi²⁴, C. Giroud⁹³, R. Glen⁹³, S. Glöggler⁶⁵, J. Goff⁹³, P. Gohil⁴¹,
V. Goloborodko⁴⁶, R. Gomes⁵⁴, B. Gonçalves⁵⁴, M. Goniche⁷, A. Goodyear⁹³,
S. Gore⁹³, G. Gorini¹⁰², T. Görler⁶⁵, N. Gotts⁹³, R. Goulding⁷⁹, E. Gow⁹³, B. Graham⁹³,
J.P. Graves²⁹, H. Greuner⁶⁵, B. Grierson⁷⁹, J. Griffiths⁹³, S. Griph⁹³, D. Grist⁹³,
W. Gromelski⁵⁰, M. Groth¹, R. Grove⁷⁶, M. Gruca⁵⁰, D. Guard⁹³, N. Gupta⁹³,
C. Gurl⁹³, L. Hackett⁹³, S. Hacquin^{7, 32}, R. Hager⁷⁹, L. Hägg¹⁹, A. Hakola¹¹⁵,
M. Halitovs¹⁰⁸, S. Hall⁹³, S.A. Hall⁹³, S. Hallworth-Cook⁹³, C.J. Ham⁹³, D.
Hamaguchi⁷¹, M. Hamed⁷, C. Hamlyn-Harris⁹³, K. Hammond⁹³, E. Harford⁹³,
J.R. Harrison⁹³, D. Harting⁹³, Y. Hatano¹¹², D.R. Hatch¹¹¹, T. Haupt⁹³, J. Hawes⁹³,

N.C. Hawkes⁹³, J. Hawkins⁹³, T. Hayashi⁷¹, S. Hazael⁹³, S. Hazel⁹³, P. Heesterman⁹³,
B. Heidbrink¹⁰⁵, W. Helou⁵⁷, O. Hemming⁹³, S.S. Henderson⁹³, R.B. Henriques⁵⁴,
D. Hepple⁹³, J. Herfindal⁷⁶, G. Hermon⁹³, J. Hill⁹³, J.C. Hillesheim⁹³, K. Hizanidis⁷³,
A. Hjalmarsson¹⁹, A. Ho³⁶, J. Hobirk⁶⁵, O. Hoenen⁵⁷, C. Hogben⁹³,
A. Hollingsworth⁹³, S. Hollis⁹³, E. Hollmann¹⁰³, M. Hölzl⁶⁵, B. Homan¹⁰⁰, M. Hook⁹³,
D. Hopley⁹³, J. Horáček⁵¹, D. Horsley⁹³, N. Horsten¹, A. Horton⁹³, L.D. Horton^{29, 32},
L. Horvath^{93, 117}, S. Hotchin⁹³, R. Howell⁹³, Z. Hu¹⁰², A. Huber³⁷, V. Huber³⁷,
T. Huddleston⁹³, G.T.A. Huijsmans⁵⁷, P. Huynh⁷, A. Hynes⁹³, D. Imrie⁹³,
M. Imrišek⁵¹, J. Ingleby⁹³, P. Innocente¹³, K. Insulander Björk²⁰, N. Isernia¹²,
I. Ivanova-Stanik⁵⁰, E. Ivings⁹³, S. Jablonski⁵⁰, S. Jachmich^{32, 57, 61}, T. Jackson⁹³,
P. Jacquet⁹³, H. Järleblad²¹, F. Jaulmes⁵¹, J. Jenaro Rodriguez⁹³, I. Jepu⁸⁸, E. Joffrin⁷,
T. Johnson⁴⁰, R. Johnson⁹³, J. Johnston⁹³, C. Jones⁹³, G. Jones⁹³, L. Jones⁹³,
N. Jones⁹³, T. Jones⁹³, A. Joyce⁹³, M. Juvonen⁹³, P. Kalniņa¹⁰⁸, T. Kaltiaisenaho¹¹⁵,
J. Kaniewski⁹³, A. Kantor⁹³, A. Kappatou⁶⁵, J. Karhunen¹⁰⁶, D. Karkinsky⁹³,
Yu. Kashchuk⁵², M. Kaufman⁷⁶, G. Kaveney⁹³, Ye.O. Kazakov⁶¹, V. Kazantzidis⁷³,
D.L. Keeling⁹³, R. Kelly⁹³, M. Kempnaars⁵⁷, D. Kennedy⁹³, C. Kennedy⁹³, J. Kent⁹³,
K. Khan⁹³, E. Khilkevich⁵⁵, C. Kiefer⁶⁵, J. Kilpeläinen¹, C. Kim⁴¹, Hyun-Tae Kim^{32, 93},
S.H. Kim⁵⁷, D.B. King⁹³, R. King⁹³, D. Kinna⁹³, V.G. Kiptily⁹³, A. Kirjasuo¹¹⁵,
K.K. Kirov⁹³, A. Kirschner³⁷, T. kiviniemi¹, G. Kizane¹⁰⁸, M. Klas³⁴, C. Klepper⁷⁶,
A. Klix⁵⁸, G. Kneale⁹³, M. Knight⁹³, P. Knight⁹³, R. Knights⁹³, S. Knipe⁹³,
M. Knolker⁴¹, S. Knott¹⁰¹, M. Kocan⁵⁷, F. Köchl⁹³, I. Kodeli⁸⁴, Y. Kolesnichenko⁴⁶,
Y. Kominis⁷³, M. Kong⁹³, V. Korovin⁷², B. Kos⁸⁴, D. Kos⁹³, H.R. Koslowski³⁷,
M. Kotschenreuther¹¹¹, M. Koubiti³, E. Kowalska-Strzęciwilk⁵⁰, K. Koziol⁶⁹,
A. Krasilnikov⁵², V. Krasilnikov^{57, 91}, M. Kresina^{7, 93}, K. Krieger⁶⁵, N. Krishnan⁹³,
A. Krivska⁶¹, U. Kruezi⁵⁷, I. Książek⁴⁹, A.B. Kukushkin⁷⁵, H. Kumpulainen¹, T. Kurki-
Suonio¹, H. Kurotaki⁷¹, S. Kwak⁶⁶, O.J. Kwon¹⁴, L. Laguardia⁴⁷, E. Lagzdina¹⁰⁸,
A. Lahtinen¹⁰⁶, A. Laing⁹³, N. Lam⁹³, H.T. Lambert³⁷, B. Lane⁹³, C. Lane⁹³,
E. Lascas Neto²⁹, E. Łaszyńska⁵⁰, K.D. Lawson⁹³, A. Lazaros⁷³, E. Lazzaro⁴⁷,
G. Learoyd⁹³, Chanyoung Lee¹⁸, S.E. Lee¹¹², S. Leerink¹, T. Leeson⁹³, X. Lefebvre⁹³,
H.J. Leggate²⁸, J. Lehmann⁹³, M. Lehnen⁵⁷, D. Leichtle^{39, 58}, F. Leipold⁵⁷, I. Lengar⁸⁴,
M. Lennholm^{33, 93}, B. Lepiavko⁴⁶, J. Leppänen¹¹⁵, E. Lerche⁶¹, A. Lescinskis¹⁰⁸,
J. Lewis⁹³, L. Li³⁷, Y. Li³⁷, J. Likonen¹¹⁵, Ch. Linsmeier³⁷, B. Lipschultz¹¹⁷,
X. Litaudon^{7, 32}, E. Litherland-Smith⁹³, F. Liu^{7, 32}, T. Loarer⁷, A. Loarte⁵⁷, R. Lobel⁹³,
B. Lomanowski⁷⁶, P.J. Lomas⁹³, J.M. López⁹⁶, R. Lorenzini¹³, S. Loreti²⁴, U. Losada⁶⁰,
V.P. Loschiavo¹², M. Loughlin⁵⁷, Z. Louka⁹³, J. Lovell⁷⁶, T. Lowe⁹³, C. Lowry^{33, 93},
S. Lubbad⁹³, T. Luce⁵⁷, R. Lucock⁹³, A. Lukin⁷⁷, C. Luna⁴, E. de la Luna⁶⁰,
M. Lungaroni⁹⁸, C.P. Lungu⁸⁸, T. Lunt⁶⁵, V. Lutsenko⁴⁶, B. Lyons⁴¹, A. Lysoivan⁶¹,
M. Machielsen²⁹, E. Macusova⁵¹, R. Mäenpää¹, C.F. Maggi⁹³, R. Maggiora⁷⁸,
M. Magness⁹³, S. Mahesan⁹³, H. Maier⁶⁵, R. Maingi⁷⁹, K. Malinowski⁵⁰,
P. Manas^{3, 65}, P. Mantica⁴⁷, M.J. Mantsinen⁴⁴, J. Manyer⁶, A. Manzanares⁹⁴, Ph.
Maquet⁵⁷, G. Marceca²⁹, N. Marcenko⁵², C. Marchetto⁵⁶, O. Marchuk³⁷, A.
Mariani⁴⁷, G. Mariano²⁴, M. Marin³⁶, M. Marinelli⁹⁸, T. Markovič⁵¹, D. Marocco²⁴,
L. Marot²², S. Marsden⁹³, J. Marsh⁹³, R. Marshall⁹³, L. Martellucci⁹⁸, A. Martin⁹³,
A.J. Martin⁹³, R. Martone¹², S. Maruyama⁵⁷, M. Maslov⁹³, S. Masuzaki⁷⁰,
S. Matejčik³⁴, M. Mattei¹², G.F. Matthews⁹³, D. Matveev³⁷, E. Matveeva⁵¹,

A. Mauriya⁵⁴, F. Maviglia¹², M. Mayer⁶⁵, M.L. Mayoral^{31, 93}, S. Mazzi³, C. Mazzotta²⁴,
R. McAdams⁹³, P.J. McCarthy¹⁰¹, K.G. McClements⁹³, J. McClenaghan⁴¹,
P. McCullen⁹³, D.C. McDonald⁹³, D. McGuckin⁹³, D. McHugh⁹³, G. McIntyre⁹³,
R. McKean⁹³, J. McKehon⁹³, B. McMillan⁹, L. McNamee⁹³, A. McShee⁹³,
A. Meakins⁹³, S. Medley⁹³, C.J. Meekes^{30, 36}, K. Meghani⁹³, A.G. Meigs⁹³, G. Meisl⁶⁵,
S. Meitner⁷⁶, S. Menmuir⁹³, K. Mergia⁷⁴, S. Merriman⁹³, Ph. Mertens³⁷,
S. Meshchaninov⁹¹, A. Messiaen⁶¹, R. Michling⁵⁷, P. Middleton⁹³,
D. Middleton Gear⁹³, J. Mietelski⁴⁸, D. Milanesio⁷⁸, E. Milani⁹⁸, F. Militello⁹³,
A. Militello Asp⁹³, J. Milnes⁹³, A. Milocco¹⁰², G. Miloshevsky⁸⁰, C. Minghao⁹³,
S. Minucci¹¹³, I. Miron⁸⁸, M. Miyamoto¹⁷, J. Mlynár^{35, 51}, V. Moiseenko⁷²,
P. Monaghan⁹³, I. Monakhov⁹³, T. Moody⁹³, S. Moon⁴⁰, R. Mooney⁹³, S. Moradi⁶¹,
J. Morales⁷, R.B. Morales⁹³, S. Mordijck¹⁰, L. Moreira⁹³, L. Morgan⁹³, F. Moro²⁴,
J. Morris⁹³, K-M. Morrison⁹³, L. Moser^{22, 57}, D. Moulton⁹³, T. Mrowetz⁹³,
T. Mundy⁹³, M. Muraglia³, A. Murari^{13, 32}, A. Muraro⁴⁷, N. Muthusonai⁹³,
B. N’Konga¹⁰⁰, Yong-Su Na¹⁸, F. Nabais⁵⁴, M. Naden⁹³, J. Naish⁹³, R. Naish⁹³,
F. Napoli²⁴, E. Nardon⁷, V. Naulin²¹, M.F.F. Nave⁵⁴, I. Nedzelskiy⁵⁴, G. Nemtsev⁹¹,
V. Nesenevich⁵⁵, I. Nestoras⁹³, R. Neu⁶⁵, V.S. Neverov⁷⁵, S. Ng⁹³, M. Nicassio⁹³,
A.H. Nielsen²¹, D. Nina⁵⁴, D. Nishijima¹⁰⁴, C. Noble⁹³, C.R. Nobs⁹³, M. Nocente¹⁰²,
D. Nodwell⁹³, K. Nordlund¹⁰⁶, H. Nordman²³, R. Normanton⁹³, J.M. Noterdaeme⁶⁵,
S. Nowak⁴⁷, E. Nunn⁹³, H. Nyström⁴⁰, M. Oberparleiter²³, B. Obryk⁴⁸,
J. O’Callaghan⁹³, T. Odupitan⁹³, H.J.C. Oliver^{93, 111}, R. Olney⁹³, M. O’Mullane¹⁰⁹,
J. Ongena⁶¹, E. Organ⁹³, F. Orsitto¹², J. Orszagh³⁴, T. Osborne⁴¹, R. Otin⁹³,
T. Otsuka⁵⁹, A. Owen⁹³, Y. Oya⁸³, M. Oyaizu⁷¹, R. Paccagnella¹³, N. Pace⁹³,
L.W. Packer⁹³, S. Paige⁹³, E. Pajuste¹⁰⁸, D. Palade⁸⁸, S.J.P. Pamela⁹³, N. Panadero⁶⁰,
E. Panontin¹⁰², A. Papadopoulos⁷³, G. Papp⁶⁵, P. Papp³⁴, V.V. Parail⁹³,
C. Pardanaud³, J. Parisi^{82, 93}, F. Parra Diaz⁸², A. Parsloe⁹³, M. Parsons⁷⁶,
N. Parsons⁹³, M. Passeri⁹⁸, A. Patel⁹³, A. Pau²⁹, G. Pautasso⁶⁵, R. Pavlichenko⁷²,
A. Pavone⁶⁶, E. Pawelec⁴⁹, C. Paz Soldan¹¹, A. Peacock^{33, 93}, M. Pearce⁹³, E. Peluso⁹⁸,
C. Penot⁵⁷, K. Pepperell⁹³, R. Pereira⁵⁴, T. Pereira⁵⁴, E. Perelli Cippo⁴⁷,
P. Pereslavltssev⁵⁸, C. Perez von Thun⁵⁰, V. Pericoli⁵⁰, D. Perry⁹³, M. Peterka⁵¹,
P. Petersson⁴⁰, G. Petravich⁸, N. Petrella⁹³, M. Peyman⁹³, M. Pillon²⁴, S. Pinches⁵⁷,
G. Pintsuk³⁷, W. Pires de Sá⁵³, A. Pires dos Reis⁵³, C. Piron²⁴, L. Piron^{13, 25},
A. Pironti¹², R. Pitts⁵⁷, K.L. van de Plassche³⁶, N. Platt⁹³, V. Plyusnin⁵⁴, M. Podesta⁷⁹,
G. Pokol⁸, F.M. Poli⁷⁹, O.G. Pompilian⁸⁸, S. Popovichev⁹³, M. Poradziński⁵⁰,
M.T. Porfiri²⁴, M. Porkolab⁶⁸, C. Porosnicu⁸⁸, M. Porton⁹³, G. Poulipoulis¹⁰⁷,
I. Predebon¹³, G. Prestopino⁹⁸, C. Price⁹³, D. Price⁹³, M. Price⁹³, D. Primetzhofer¹⁹,
P. Prior⁹³, G. Provas⁸¹, G. Pucella²⁴, P. Puglia²⁹, K. Purahoo⁹³, I. Pusztai²⁰,
O. Putignano¹⁰², T. Pütterich⁶⁵, A. Quercia¹², E. Rachlew²⁰, G. Radulescu⁷⁶,
V. Radulovic⁸⁴, M. Rainford⁹³, P. Raj⁵⁸, G. Ralph⁹³, G. Ramogida²⁴, D. Rasmussen⁷⁶,
J.J. Rasmussen²¹, G. Rattá⁶⁰, S. Ratynskaia⁸⁵, M. Rebai⁴⁷, D. Réfy⁸, R. Reichle⁵⁷,
M. Reinke⁷⁶, D. Reiser³⁷, C. Reux⁷, S. Reynolds⁹³, S. Richyal⁹³, D. Rigamonti⁴⁷,
F.G. Rimini⁹³, J. Risner⁷⁶, M. Riva²⁴, J. Rivero-Rodriguez⁹⁵, C.M. Roach⁹³,
R. Robins⁹³, S. Robinson⁹³, D. Robson⁹³, R. Rodionov⁵², P. Rodrigues⁵⁴,
M. Rodriguez Ramos⁸¹, P. Rodriguez-Fernandez⁶⁸, F. Romanelli²⁴, M. Romanelli⁹³,
S. Romanelli⁹³, J. Romazanov³⁷, R. Rossi⁹⁸, S. Rowe⁹³, D. Rowlands^{32, 93},

M. Rubel⁴⁰, G. Rubinacci¹², G. Rubino¹¹³, L. Ruchko⁵³, M. Ruiz⁹⁶, J. Ruiz Ruiz⁸²,
C. Ruset⁸⁸, J. Rzakiewicz⁶⁹, S. Saarelma⁹³, E. Safi¹⁰⁶, A. Sahlberg¹⁹, M. Salewski²¹,
A. Salmi¹¹⁵, R. Salmon⁹³, F. Salzedas^{54, 97}, I. Sanders⁹³, D. Sandiford⁹³, B. Santos⁵⁴,
A. Santucci²⁴, K. Särkimäki²⁰, R. Sarwar⁹³, I. Sarychev⁹³, O. Sauter²⁹, N. Scapin⁶⁷,
F. Schluck³⁷, K. Schmid⁶⁵, S. Schmuck⁴⁷, M. Schneider⁵⁷, P.A. Schneider⁶⁵,
D. Schwörer²⁸, G. Scott⁹³, M. Scott⁹³, D. Scraggs⁹³, S. Scully⁹³, M. Segato⁹³,
Jaemin Seo¹⁸, G. Sergienko³⁷, M. Sertoli⁹³, S.E. Sharapov⁹³, A. Shaw⁹³, H. Sheikh⁹³,
U. Sheikh²⁹, A. Shepherd⁹³, A. Shevelev⁵⁵, P. Shigin⁵⁷, K. Shinohara⁹⁰, S. Shiraiwa⁷⁹,
D. Shiraki⁷⁶, M. Short⁹³, G. Sias¹⁶, S.A. Silburn⁹³, A. Silva⁵⁴, C. Silva⁵⁴, J. Silva⁹³,
D. Silvagni⁶⁵, D. Simfukwe⁹³, J. Simpson^{1, 93}, D. Sinclair⁹³, S.K. Sipilä¹, A.C.C. Sips³³,
P. Sirén¹⁰⁶, A. Sirinelli⁵⁷, H. Sjöstrand¹⁹, N. Skinner⁹³, J. Slater⁹³, N. Smith⁹³,
P. Smith⁹³, J. Snell⁹³, G. Snoep³⁶, L. Snoj⁸⁴, P. Snyder⁴¹, S. Soare⁸⁷, E.R. Solano⁶⁰,
V. Solokha¹, A. Somers²⁸, C. Sommariva²⁹, K. Soni²², E. Sorokovoy⁷², M. Sos⁵¹,
J. Sousa⁵⁴, C. Sozzi⁴⁷, S. Spagnolo¹³, T. Spelzini⁹³, F. Spineanu⁸⁸, D. Spong⁷⁶,
D. Sprada⁹³, S. Sridhar⁷, C. Srinivasan⁹³, G. Stables⁹³, G. Staebler⁴¹,
I. Stamatelatos⁷⁴, Z. Stancar⁸⁴, P. Staniec⁹³, G. Stankūnas⁶², M. Stead⁹³,
E. Stefanikova⁴⁰, A. Stephen⁹³, J. Stephens⁹³, P. Stevenson⁹³, M. Stojanov⁹³,
P. Strand²³, H.R. Strauss⁴², S. Strikwerda⁹³, P. Ström⁴⁰, C.I. Stuart⁹³,
W. Studholme⁹³, E. Suchkov³⁴, S. Sumida⁷¹, H.J. Sun⁹³, T.E. Susti¹⁰⁸, J. Svensson⁶⁶,
J. Svoboda⁵¹, R. Sweeney⁶⁸, D. Sytnykov⁷², T. Szabolics⁸, G. Szepesi⁹³, B. Tabia⁹³,
T. Tadić⁸¹, B. Tál⁶⁵, T. Tala¹¹⁵, A. Tallargio⁹³, P. Tamain⁷, H. Tan⁹³, K. Tanaka⁷⁰,
W. Tang⁷⁹, M. Tardocchi⁴⁷, D. Taylor⁹³, A.S. Teimane¹⁰⁸, G. Telesca⁵⁰, N. Teplova⁵⁵,
A. Teplukhina⁷⁹, A. Terra³⁷, D. Terranova¹³, N. Terranova²⁴, D. Testa²⁹,
E. Tholerus^{40, 93}, J. Thomas⁹³, E. Thoren⁸⁵, A. Thorman⁹³, W. Tierens⁶⁵,
R.A. Tinguely⁶⁸, A. Tipton⁹³, H. Todd⁹³, M. Tokitani⁷⁰, P. Toliás⁸⁵, M. Tomeš⁵¹,
A. Tookey⁹³, Y. Torikai⁴³, U. von Toussaint⁶⁵, P. Tsavalas⁷⁴, D. Tskhakaya^{51, 86},
I. Turner⁹³, M. Turner⁹³, M.M. Turner²⁸, M. Turnyanskiy³¹, G. Tvalashvili⁹³,
S. Tyrrell⁹³, M. Tyshchenko⁴⁶, A. Uccello⁴⁷, V. Udintsev⁵⁷, G. Urbanczyk⁷,
A. Vadgama⁹³, D. Valcarcel⁹³, M. Valisa¹³, P. Vallejos Olivares⁴⁰, O. Vallhagen²⁰,
M. Valovič⁹³, D. Van Eester⁶¹, J. Varje¹, S. Vartanian⁷, T. Vasilopoulou⁷⁴,
G. Vayakis⁵⁷, M. Vecsei⁸, J. Vega⁶⁰, S. Ventre¹², G. Verdoolaege¹⁵, C. Verona⁹⁸,
G. Verona Rinati⁹⁸, E. Veshchev⁵⁷, N. Vianello¹³, E. Viezzer⁹⁵, L. Vignitchouk⁸⁵,
R. Villari²⁴, F. Villone¹², P. Vincenzi¹³, I. Vinyar⁷⁷, B. Viola²⁴, A.J. Virtanen¹,
A. Vitins¹⁰⁸, Z. Vizvary⁹³, G. Vlad²⁴, M. Vlad⁸⁸, P. Vondráček⁵¹, P. de Vries⁵⁷,
B. Wakeling⁹³, N.R. Walkden⁹³, M. Walker⁹³, R. Walker⁹³, M. Walsh⁵⁷, E. Wang³⁷,
N. Wang⁹³, S. Warder⁹³, R. Warren⁹³, J. Waterhouse⁹³, C. Watts⁵⁷, T. Wauters⁶¹,
A. Weckmann⁴⁰, H. Wedderburn-Maxwell⁹³, M. Weiland⁶⁵, H. Weisen²⁹,
M. Weiszflog¹⁹, P. Welch⁹³, N. Wendler⁵⁰, A. West⁹³, M. Wheatley⁹³, S. Wheeler⁹³,
A. Whitehead⁹³, D. Whittaker⁹³, A. Widdowson⁹³, S. Wiesen³⁷, J. Wilkinson⁹³,
J. Williams⁹³, D. Willoughby⁹³, I. Wilson⁹³, J. Wilson⁹³, T. Wilson⁹³,
M. Wischmeier⁶⁵, P. Wise⁹³, G. Withenshaw⁹³, A. Withycombe⁹³, D. Witts⁹³,
A. Wojcik-Gargula⁴⁸, E. Wolfrum⁶⁵, R. Wood⁹³, C. Woodley⁹³, R. Woodley⁹³,
B. Woods⁹³, J. Wright⁹³, J.C. Wright⁶⁸, T. Xu⁹³, D. Yadikin²³, M. Yajima⁷⁰,
Y. Yakovenko⁴⁶, Y. Yang⁵⁷, W. Yanling³⁷, V. Yanovskiy⁵¹, I. Young⁹³, R. Young⁹³,
R.J. Zabolockis¹⁰⁸, J. Zacks⁹³, R. Zagorski⁶⁹, F.S. Zaitsev³⁴, L. Zakharov¹⁰⁶,

**A. Zarins¹⁰⁸, D. Zarzoso Fernandez³, K-D. Zastrow⁹³, Y. Zayachuk⁹³, M. Zerbini²⁴,
W. Zhang⁶⁵, Y. Zhou⁴⁰, M. Zlobinski³⁷, A. Zocco⁶⁶, A. Zohar⁸⁴, V. Zoita⁸⁸,
S. Zoletnik⁸, V. K. Zotta²⁶, I. Zoulias⁹³, W. Zwingmann⁵⁴ and I. Zychor⁶⁹**

¹ Aalto University, PO Box 14100, FIN-00076 Aalto, Finland

² Aix-Marseille University, CNRS, IUSTI, UMR 7343, 13013 Marseille, France

³ Aix-Marseille University, CNRS, PIIM, UMR 7345, 13013 Marseille, France

⁴ Arizona State University, Tempe, AZ, United States of America

⁵ Astrophysics Research Centre, School of Mathematics and Physics, Queen's University, Belfast, BT7 1NN, United Kingdom of Great Britain and Northern Ireland

⁶ Barcelona Supercomputing Center, Barcelona, Spain

⁷ CEA, IRFM, F-13108 Saint Paul Lez Durance, France

⁸ Centre for Energy Research, POB 49, H-1525 Budapest, Hungary

⁹ Centre for Fusion, Space and Astrophysics, University of Warwick, Coventry, CV4 7AL, United Kingdom of Great Britain and Northern Ireland

¹⁰ College of William and Mary, Williamsburg, VA 23185, United States of America

¹¹ Columbia University, New York, NY 10027, United States of America

¹² Consorzio CREATE, Via Claudio 21, 80125 Napoli, Italy

¹³ Consorzio RFX, Corso Stati Uniti 4, 35127 Padova, Italy

¹⁴ Daegu University, Jillyang, Gyeongsan, Gyeongbuk 712-174, Republic of Korea

¹⁵ Department of Applied Physics, Ghent University, 9000 Ghent, Belgium

¹⁶ Department of Electrical and Electronic Engineering, University of Cagliari, Piazza d'Armi 09123 Cagliari, Italy

¹⁷ Department of Material Science, Shimane University, 1060 Nishikawatsu, Matsue, 690-8504, Japan

¹⁸ Department of Nuclear Engineering, Seoul National University, Seoul, South Korea

¹⁹ Department of Physics and Astronomy, Uppsala University, SE-75120 Uppsala, Sweden

²⁰ Department of Physics, Chalmers University of Technology, SE-41296 Gothenburg, Sweden

²¹ Department of Physics, Technical University of Denmark, Bldg 309, DK-2800 Kgs Lyngby, Denmark

²² Department of Physics, University of Basel, Switzerland

²³ Department of Space, Earth and Environment, Chalmers University of Technology, SE-41296 Gothenburg, Sweden

²⁴ Dip.to Fusione e Tecnologie per la Sicurezza Nucleare, ENEA C. R. Frascati, via E. Fermi 45, 00044 Frascati (Roma), Italy

²⁵ Dipartimento di Fisica "G. Galilei", Università degli Studi di Padova, Padova, Italy

²⁶ Dipartimento di Ingegneria Astronautica, Elettrica ed Energetica, SAPIENZA Università di Roma, Via Eudossiana 18, 00184 Roma, Italy

²⁷ Dipartimento di Ingegneria Elettrica Elettronica e Informatica, Università degli Studi di Catania, 95125 Catania, Italy

²⁸ Dublin City University (DCU), Dublin, Ireland

²⁹ Ecole Polytechnique Fédérale de Lausanne (EPFL), Swiss Plasma Center (SPC), CH-1015 Lausanne, Switzerland

³⁰ Eindhoven University of Technology, Netherlands

³¹ EUROfusion Programme Management Unit, Boltzmannstr. 2, 85748 Garching, Germany

³² EUROfusion Programme Management Unit, Culham Science Centre, Culham, OX14 3DB, United Kingdom of Great Britain and Northern Ireland

³³ European Commission, B-1049 Brussels, Belgium

³⁴ Faculty of Mathematics, Department of Experimental Physics, Physics and Informatics Comenius University Mlynska dolina F2, 84248 Bratislava, Slovakia

³⁵ Faculty of Nuclear Sciences and Physical Engineering, Czech Technical University in Prague, Břehová 78/7, 115 19 Praha 1, Czech Republic

³⁶ FOM Institute DIFFER, Eindhoven, Netherlands

³⁷ Forschungszentrum Jülich GmbH, Institut für Energie- und Klimaforschung, Plasmaphysik, 52425 Jülich, Germany

³⁸ Fourth State Research, 503 Lockhart Dr, Austin, TX, United States of America

³⁹ Fusion for Energy Joint Undertaking, Josep Pl. 2, Torres Diagonal Litoral B3, 08019, Barcelona, Spain

⁴⁰ Fusion Plasma Physics, EECS, KTH, SE-10044 Stockholm, Sweden

⁴¹ General Atomics, PO Box 85608, San Diego, CA 92186-5608, United States of America

- ⁴² HRS Fusion, West Orange, NJ, United States of America
- ⁴³ Ibaraki University Graduate School of Science and Engineering, Mito, Ibaraki 310-8512, Japan
- ⁴⁴ ICREA and Barcelona Supercomputing Center, Barcelona, Spain
- ⁴⁵ Institut Jean Lamour, UMR 7198, CNRS-Université de Lorraine, 54500 Vandoeuvre-lès-Nancy, France
- ⁴⁶ Institute for Nuclear Research, Prospekt Nauky 47, Kyiv 03680, Ukraine
- ⁴⁷ Institute for Plasma Science and Technology, CNR, via R. Cozzi 53, 20125 Milano, Italy
- ⁴⁸ Institute of Nuclear Physics, Radzikowskiego 152, 31-342 Kraków, Poland
- ⁴⁹ Institute of Physics, Opole University, Oleska 48, 45-052 Opole, Poland
- ⁵⁰ Institute of Plasma Physics and Laser Microfusion, Hery 23, 01-497 Warsaw, Poland
- ⁵¹ Institute of Plasma Physics of the CAS, Za Slovankou 1782/3, 182 00 Praha 8, Czech Republic
- ⁵² Institution "Project Center ITER", Moscow, 123182, Russian Federation
- ⁵³ Instituto de Física, Universidade de São Paulo, Rua do Matão Travessa R Nr.187, CEP 05508-090 Cidade Universitária, São Paulo, Brasil
- ⁵⁴ Instituto de Plasmas e Fusão Nuclear, Instituto Superior Técnico, Universidade de Lisboa, 1049-001 Lisboa, Portugal
- ⁵⁵ Ioffe Physico-Technical Institute, 26 Politekhnicheskaya, St Petersburg 194021, Russian Federation
- ⁵⁶ Istituto dei Sistemi Complessi - CNR and Dipartimento di Energia - Politecnico di Torino, C.so Duca degli Abruzzi 24, 10129 Torino, Italy
- ⁵⁷ ITER Organization, Route de Vinon, CS 90 046, 13067 Saint Paul Lez Durance, France
- ⁵⁸ Karlsruhe Institute of Technology, PO Box 3640, D-76021 Karlsruhe, Germany
- ⁵⁹ Kindai University, Higashi-Osaka, 577-8502, Japan
- ⁶⁰ Laboratorio Nacional de Fusión, CIEMAT, Madrid, Spain
- ⁶¹ Laboratory for Plasma Physics LPP-ERM/KMS, B-1000 Brussels, Belgium
- ⁶² Lithuanian Energy Institute, Breslaujos g. 3, LT-44403, Kaunas, Lithuania
- ⁶³ Magnetic Sensor Laboratory, Lviv Polytechnic National University, Lviv, Ukraine
- ⁶⁴ Maritime University of Szczecin Faculty of Marine Engineering, Waly Chrobrego 1-2, 70-500 Szczecin, Poland
- ⁶⁵ Max-Planck-Institut für Plasmaphysik, D-85748 Garching, Germany
- ⁶⁶ Max-Planck-Institut für Plasmaphysik, Teilinstitut Greifswald, D-17491 Greifswald, Germany
- ⁶⁷ Mechanics, SCI, KTH SE-100 44 Stockholm, Sweden
- ⁶⁸ MIT Plasma Science and Fusion Center, Cambridge, MA 02139, United States of America
- ⁶⁹ National Centre for Nuclear Research (NCBJ), 05-400 Otwock-Świerk, Poland
- ⁷⁰ National Institute for Fusion Science, Oroshi, Toki, Gifu 509-5292, Japan
- ⁷¹ National Institutes for Quantum and Radiological Science and Technology, Naka, Ibaraki 311-0193, Japan
- ⁷² National Science Center "Kharkov Institute of Physics and Technology", Akademichna 1, Kharkiv 61108, Ukraine
- ⁷³ National Technical University of Athens, Iroon Politechniou 9, 157 73 Zografou, Athens, Greece
- ⁷⁴ NCSR 'Demokritos' 153 10, Agia Paraskevi Attikis, Greece
- ⁷⁵ NRC Kurchatov Institute, 1 Kurchatov Square, Moscow 123182, Russian Federation
- ⁷⁶ Oak Ridge National Laboratory, Oak Ridge, TN 37831, TN, United States of America
- ⁷⁷ PELIN LLC, 27a, Gzhatskaya Ulitsa, Saint Petersburg, 195220, Russian Federation
- ⁷⁸ Politecnico di Torino, Corso Duca degli Abruzzi 24, I-10129 Torino, Italy
- ⁷⁹ Princeton Plasma Physics Laboratory, James Forrestal Campus, Princeton, NJ 08543, NJ, United States of America
- ⁸⁰ Purdue University, 610 Purdue Mall, West Lafayette, IN 47907, United States of America
- ⁸¹ Ruđer Bošković Institute, Bijenička 54, 10000 Zagreb, Croatia
- ⁸² Rudolf Peierls Centre for Theoretical Physics, University of Oxford, Oxford OX1 3PU, United Kingdom of Great Britain and Northern Ireland
- ⁸³ Shizuoka University, Shizuoka, 422-8529, Japan
- ⁸⁴ Slovenian Fusion Association (SFA), Jozef Stefan Institute, Jamova 39, SI-1000 Ljubljana, Slovenia
- ⁸⁵ Space and Plasma Physics, EECS, KTH SE-100 44 Stockholm, Sweden
- ⁸⁶ Technische Universität Wien, Fusion@ÖAW Österreichische Akademie der Wissenschaften (ÖAW), Austria
- ⁸⁷ The National Institute for Cryogenics and Isotopic Technology, Ramnicu Valcea, Romania
- ⁸⁸ The National Institute for Laser, Plasma and Radiation Physics, Magurele-Bucharest, Romania
- ⁸⁹ The National Institute for Optoelectronics, Magurele-Bucharest, Romania
- ⁹⁰ The University of Tokyo, Kashiwa, Chiba, 277-0882, Japan

- ⁹¹ Troitsk Institute of Innovating and Thermonuclear Research (TRINITI), Troitsk 142190, Moscow Region, Russian Federation
- ⁹² UNED, Dpto. Informática y Automática, Madrid, Spain
- ⁹³ United Kingdom Atomic Energy Authority, Culham Science Centre, Abingdon, Oxon, OX14 3DB, United Kingdom of Great Britain and Northern Ireland
- ⁹⁴ Universidad Complutense de Madrid, Madrid, Spain
- ⁹⁵ Universidad de Sevilla, Sevilla, Spain
- ⁹⁶ Universidad Politécnica de Madrid, Grupo I2A2, Madrid, Spain
- ⁹⁷ Universidade do Porto, Faculdade de Engenharia, 4200-465 Porto, Portugal
- ⁹⁸ Università di Roma Tor Vergata, Via del Politecnico 1, Roma, Italy
- ⁹⁹ Universitat Politècnica de Catalunya, Barcelona, Spain
- ¹⁰⁰ Université Cote d'Azur, CNRS, Inria, LJAD, Parc Valrose, 06108 Nice Cedex 02, France
- ¹⁰¹ University College Cork (UCC), Cork, Ireland
- ¹⁰² University Milano-Bicocca, Piazza della Scienza 3, 20126 Milano, Italy
- ¹⁰³ University of California at San Diego, La Jolla, CA 92093, United States of America
- ¹⁰⁴ University of California, 1111 Franklin St., Oakland, CA 94607, United States of America
- ¹⁰⁵ University of California, Irvine, Irvine, California 92697, United States of America
- ¹⁰⁶ University of Helsinki, PO Box 43, FI-00014 University of Helsinki, Finland
- ¹⁰⁷ University of Ioannina, Panepistimioupoli Ioanninon, PO Box 1186, 45110 Ioannina, Greece
- ¹⁰⁸ University of Latvia, 19 Raina Blvd., Riga, LV 1586, Latvia
- ¹⁰⁹ University of Strathclyde, Glasgow, G4 0NG, United Kingdom of Great Britain and Northern Ireland
- ¹¹⁰ University of Tennessee, Knoxville, TN 37996, TN, United States of America
- ¹¹¹ University of Texas at Austin, Institute for Fusion Studies, Austin, TX 78712, United States of America
- ¹¹² University of Toyama, Toyama, 930-8555, Japan
- ¹¹³ University of Tuscia, DEIM, Via del Paradiso 47, 01100 Viterbo, Italy
- ¹¹⁴ University of Wisconsin-Madison, Madison, WI 53706, United States of America
- ¹¹⁵ VTT Technical Research Centre of Finland, PO Box 1000, FIN-02044 VTT, Finland
- ¹¹⁶ Warsaw University of Technology, 02-507 Warsaw, Poland
- ¹¹⁷ York Plasma Institute, Department of Physics, University of York, York, YO10 5DD, United Kingdom of Great Britain and Northern Ireland

E-mail: joelle.mailloux@ukaea.uk

Received xxxxxx

Accepted for publication xxxxxx

Published xxxxxx

Abstract

The JET 2019-2020 scientific and technological programme exploited the results of years of concerted scientific and engineering work, including the ITER-like wall (ILW: Be wall and W divertor) installed in 2010, improved diagnostic capabilities now fully available, a major Neutral Beam Injection (NBI) upgrade providing record power in 2019-2020, and tested the technical & procedural preparation for safe operation with tritium. Research along three complementary axes yielded a wealth of new results. Firstly, the JET plasma programme delivered scenarios suitable for high fusion power (PFUS) and alpha particle (α) physics in the coming D-T campaign (DTE2), with record sustained neutron rates, as well as plasmas for clarifying the impact of isotope mass on plasma core, edge and plasma-wall interactions, and for ITER pre-fusion power operation. The efficacy of the newly installed Shattered Pellet Injector (SPI) for mitigating disruption forces and runaway electrons was demonstrated. Secondly, research on the consequences of long-term exposure to JET-ILW plasma was completed, with emphasis on wall damage and fuel retention, and with analyses of wall materials and dust particles that will help validate assumptions and codes for design & operation of ITER and DEMO. Thirdly, the nuclear technology programme aiming to deliver maximum technological return from operations in D, T and D-T benefited from the highest

D-D neutron yield in years, securing results for validating radiation transport and activation codes, and nuclear data for ITER.

Keywords: JET, ITER-like wall, D-T, tritium, isotope, scenario development, nuclear technology, plasma facing components

1. Introduction

The JET programme in 2019-2020 focussed on preparing for the exploitation of JET's currently unique capabilities, tritium handling and ITER-like wall (ILW: Be first wall and W divertor [115]), along three complementary axes, reported on here. Firstly, section 2 to 5 summarises the results of the preparation of plasmas for sustained high fusion power (P_{FUS}) and alpha particle (α) physics in DTE2, and for clarifying the impact of isotope and plasma species; the final technical preparations; and the exploitation of the newly installed SPI [1] for mitigating disruption forces and runaway electrons. Section 6 addresses the research on long-term exposure to plasma in JET-ILW, with emphasis on wall damage and fuel retention, and including analyses of wall materials and dust particles. Section 7 summarises results from the nuclear technology programme [2] after exposure to the highest D-D neutron yield obtained in years of JET operation, and the preparation for tests in D-T.

2. Preparation of integrated scenarios for JET's coming D-T campaign (DTE2)

2.1 Scenarios for sustained high fusion power

Plasmas with sustained high P_{FUS} with neutron rate (5s average) up to $3.3 \times 10^{16} \text{ n/s}$ were obtained with tolerable divertor temperatures and controlled high/medium Z impurity for the full pulse duration. The equivalent DT power ($P_{\text{EQ,DT}}$) calculated assuming plasmas and beams composition of 50%/50% D/T far exceeds the sustained D-T fusion power in the 1st JET DT campaign (DTE1) [3] (Fig. 1), thus meeting a key requirement for DTE2. Based on predictions including isotopic and fast particles effects on core transport, these plasmas offer good prospects for reaching D-T fusion power of 11-17 MW [9]. In contrast with the short DTE1 peak performance plasmas, the scenarios prepared for DTE2 are based on H-mode plasmas with steady performance for 5s, corresponding to several thermal energy confinement times ($\tau_{\text{E}} \sim 0.2\text{-}0.3\text{ s}$ for high power hybrid and baseline plasmas), with the pedestal contributing significantly to the improved confinement, and higher overall electron density (n_{e}), but lower core ion and electron temperatures (T_{i} , T_{e}). For example, pulse #42976 in figure 1 and its deuterium counterpart #40305 (not shown) have line average density ($n_{\text{el}} \approx 4 \times 10^{19} \text{ m}^{-3}$, core

$T_{\text{i}} \approx 25 \text{ KeV}$ and $T_{\text{e}} \approx 10 \text{ keV}$ (values are averaged over 0.7s during the period with highest neutron rate). In comparison, the baseline pulse #96994 has $n_{\text{el}} \approx 6 \times 10^{19} \text{ m}^{-3}$ and core T_{i} and $T_{\text{e}} \approx 8.5 \text{ keV}$ and 6.5 keV respectively. Additionally, JET-ILW has significantly enhanced diagnostic capabilities compared to DTE1, including for pedestal measurements, with recent additions (energetic particles (EP) & neutrons, turbulence, main ion CX) [5] fully commissioned and exploited in 2019-2020, ready for the tritium and D-T experiments planned in 2021.

To address what was a challenge in the context of JET-ILW (in particular, impurity control issues and lower confinement compared to equivalent plasmas in JET with C wall [6]), the development of integrated scenarios for sustained high P_{FUS} was a focus of the JET campaigns from 2015 onwards, exploiting the NBI upgrade [7] which provided record power in 2019-2020 (P_{NBI} up to 32MW, with $\geq 30\text{ MW}$ for 3s on a large number of shots). Two routes were pursued to maximise chances of success and to explore complementary physics: Baseline (high current route) and Hybrid (high beta route), both leading to similar average neutron rate in the 2019-2020 campaigns though they had to overcome scenario specific challenges [8], with recent progress reported in [9] and summarised below. Although priority was given to developing sustained performance rather than short very high fusion power, it is worth noting that peak neutron rates of $5.7 \times 10^{16} \text{ n/s}$ were obtained in Hybrid plasmas, matching DD neutrons records in TFTR, JET and JT-60U [4]. These plasmas are likely to provide the highest α power in DT, complementing dedicated studies for clear α effects (see sections 2.2, 2.3).

A key development for sustained performance in JET Hybrid plasmas (tailored q-profile to avoid magnetohydrodynamic (MHD) instabilities, $q_{95} \sim 4.5$, plasma current $I_{\text{p}} \leq 2.7\text{ MA}$, and total normalised & poloidal beta $\beta_{\text{N}} \geq 2.4$, $\beta_{\text{p}} \geq 1$) since last reported in [8] was an improved H-mode entry scenario using low initial gas flow, providing access to high edge and core ion temperature (T_{i}), low plasma radiation and high thermal and total fusion power, sustained for the duration of the high heating phase. The pedestal and core T_{e} and T_{i} , and the peak and average fusion performance are the highest so far in JET-ILW, with normalised electron collisionality ν_{e}^* near that expected in ITER (~ 0.1). After an initial peak in temperature (at the time of the peak in neutron rate in Fig.1 and Fig. 2-a), the plasma evolves to slightly lower T_{i} , T_{e} as

the plasma density (n_e) increases, to sustained high performance until the end of the heating phase, with MHD avoidance obtained by initial q-profile optimisation and ELM frequency (f_{ELM}) controlled with gas in real-time. A crucial ingredient ensuring tolerable W content despite using very low gas dosing is the hot pedestal which provides edge W screening, as predicted for ITER in [10]. This has been demonstrated for the first time, using a method based on a detailed analysis of fast bolometry data to quantify the W flushing by ELMs and inter-ELM W influxes across the pedestal [11]. The analysis shows that during ELMs there is a net influx of W, but that the W is expelled between ELMs. In [116], this analysis method is applied to high power baseline plasmas and shows that, in contrast to the hybrid plasmas, the pedestal acts to draw W into the confined plasma but the ELMs are providing sufficient flushing to maintain a steady W content. Furthermore, the flat core n_e and peaked T_i , T_e profiles result in outward W convection, localising the W to the periphery from where it can be efficiently flushed out by ELMs.

Progress in the baseline scenario ($q_{95} \sim 3$, $I_p \geq 3\text{MA}$, $\beta_N \leq 2.2$) relied on the previously established recipe [8] with D pellets for ensuring sufficiently high f_{ELM} for W flushing, and low total D_2 throughput for good pedestal and core confinement. Compared to plasmas with high gas puffing, these plasmas exhibit higher pedestal T_e ($T_{e,\text{PED}}$) but lower $n_{e,\text{PED}}$, along with higher core T_i/T_e and rotation [8,12], with all of these contributing to the core transport. The evolution of the Baseline shot with best sustained performance is shown in figure 2-b).

This successful recipe (pellets for ELM pacing and low gas dosing for improved pedestal and core confinement) was extended to 3.8MA, with a single shot at 4MA. The highest peak neutron rate in baseline plasmas so far is obtained at 3.5MA, but more time is needed for optimising the performance at 3.8MA & 4MA with $P_{\text{NBI}} > 30\text{MW}$. In contrast to initial results in JET-ILW [13], similar plasma energy to JET with C-wall plasmas are obtained at 3.5MA, and a clear improvement at 3.8MA & 4MA compared to [13], though with higher power to compensate for the impact of gas fuelling for W control. Disruption avoidance was a key part of this scenario development, see section 4.2. During the work to optimise baseline plasmas, a high confinement regime with naturally small ELMs was obtained by reducing gas dosing to zero [14]. Although so far not sustained, this regime highlights physics of interest to ITER: $T_i/T_e > 1$ from the pedestal to the core and (hollow) impurity profile contributing to ITG turbulence stabilisation, and small ELMs at low v^* .

The ‘predict first’ approach applied to predicting D performance when increasing B_T , I_p and power, based on integrated theory-based pedestal-core models, using as a starting point the 2014 plasmas, as reported in [15], proved

very successful in predicting hybrid plasmas performance at higher B_T , I_p and power, but underestimated baseline plasmas progress. Possible reasons are as follow, 1) in contrast to the hybrid plasmas, typically with type-I ELMs, the JET-ILW baseline plasmas with pellets show compound ELMs, with pedestal behaviour not well reproduced by the predictive pedestal model used, EUROPED [16], 2) EUROPED is missing key physics, in particular, it did not calculate self-consistently $n_{e,\text{PED}}$ but used empirical assumptions based on the JET pedestal dataset, and assumed $T_{i,\text{PED}} = T_{e,\text{PED}}$ as was the case for the 2014 plasmas, while the latest highest performance baseline plasmas show $T_{i,\text{PED}} > T_{e,\text{PED}}$. Further development of self consistent, theory based, pedestal models, e.g. such as described in [17], are required in order to predict ITER and fusion reactors performance with higher confidence.

2.2 Radio frequency heating schemes for ITER PFPO and D-T operation

Ion Cyclotron Radiofrequency (ICRF) Heating is a key ingredient for core impurity control in JET and can boost the fusion performance by increasing T_i or through NBI-ICRF synergy [18]. In recent experiments with ^3He minority heating, the best plasma performance in terms of neutron rate and plasma energy was obtained at low ^3He concentration of $\sim 2\%$. This supports findings from earlier multi-code predictions for ITER [19] where good absorption and performance with a ^3He concentration of $\sim 3\%$ was found, desirable since leading to lower operational cost. ^3He minority heating and 2nd harmonic heating of T, the two main ICRF schemes foreseen for ITER full-field operation in D-T plasmas, will be investigated in the coming JET T and DT campaigns [20].

Significant progress was achieved with three-ion ICRF scenarios, now a flexible tool with a broad range of applications [21]. Recent experiments in mixed D- ^3He plasmas ($n(^3\text{He})/n_e \approx 20\text{-}25\%$) generated fusion-born α in the plasma core at a rate $1\text{-}2 \times 10^{16} \text{ s}^{-1}$ [22], Fig. 3(a), to demonstrate new fast-ion (FI) diagnostic capabilities for DTE2. Figure 3(b) shows the spatial profile of D- ^3He fusion-born α , inferred from tomographic reconstruction of the measured γ -ray emission with new detectors. These experiments provided insights in the complex interplay between FI effects and plasma confinement. A large variety of Alfvénic eigenmodes (AEs) were frequently observed, including Toroidal AEs (TAEs), Ellipticity-induced AEs (EAEs) and in some cases reversed-shear AEs. The strong source of electron heating from MeV-range ions also allowed studying plasma transport and the impact of FI on microturbulence in conditions close to those expected in ITER with α heating. In particular, the experimental observation $T_i \approx T_e$ was explained by the detailed gyrokinetic analysis, revealing a novel mechanism of turbulence

stabilization in plasmas with MeV-range ions and strong FI driven AEs [24].

Three-ion ICRF scenarios are promising for the non-active and D-T operational phases of ITER. An example is the three-ion ^4He -(^3He)-H ICRF scheme, recently applied for heating non-active H 4He plasmas at JET. In these experiments, for the first time, an enhanced high-resolution sub-divertor residual gas analyzer [25], as planned for ITER, provided simultaneous measurements of ^4He and ^3He concentrations ($n(^4\text{He})/n_e \approx 10\%$, $n(^3\text{He})/n_e \approx 0.2\%$). The experiments were accompanied by good progress in modelling three-ion ICRF scenarios. The distributions of FI computed by PION and TRANSP/TORIC [23] were validated against a broad range of FI diagnostics [26]. The numerical simulations guided the design of dedicated scenarios for DTE2. The planned applications include the demonstration of T_i increase with ICRF heating of ^9Be impurities relevant for ITER, and optimized fusion-power production scenarios for α physics and AE studies.

2.3 Preparation for α driven TAEs experiments in D-T

Significant progress was made in preparing the dedicated scenario for maximizing the likelihood of observing α -driven TAEs in the JET D-T campaign, as reported in [117]. Enhanced performance compared to past campaigns was obtained, with the highest neutron rate in a NBI-only ITB discharge in JET-ILW to date achieved in pulse 96852 ($2.55 \times 10^{16}/\text{s}$, with $P_{\text{NBI}} = 31\text{MW}$), exceeding that previously reported [27], and comparable to that of JET C-wall deuterium pulse #40214, which was considered the best candidate for α -driven TAE studies in the first JET D-T campaign. The afterglow phase in this pulse is triggered on neutron rollover by a real-time (RT) algorithm designed for this purpose. TRANSP simulations for #96852 assuming D-T plasmas and D-T NBI predict a normalized fusion α pressure $\beta_{\alpha}(0) \sim 0.13\%$ (Fig. 4) i.e. significantly larger than the values typical of successful α -driven TAE experiments performed in TFTR [28]. Non-linear stability calculations are underway to predict whether the drive associated to α will be sufficient to overcome the damping mechanisms during the afterglow, to be compared to the experiment in DTE2.

In support of AE experiments, the AE Active Diagnostic (AEAD) successfully excited thousands of stable AEs in hundreds of plasmas during the recent JET D campaign [29]. Measured frequencies, net damping rates, and toroidal mode numbers agree well with MHD, kinetic, and gyrokinetic simulations [30]. Novel measurements of marginal AE stability in plasmas with high power give confidence in successful operation during DTE2, overcoming evidence of limited TAE diagnostic efficiency in H-mode and X-point magnetic configuration [31]

2.4 High performance seeded plasma with ITER relevant edge conditions

The preparation for DTE2 included the development of an integrated high core performance, neon seeded scenario with 2.7T/2.5MA, high triangularity $\delta = 0.4$, and divertor configuration with inner and outer strike-points (S-P) on vertical targets, with edge conditions closer to ITER partially to fully detached divertor conditions [32]. In contrast to previous results at lower power [33], Ne seeded plasmas with $P_{\text{NBI}} \geq 25\text{MW}$, up to 30MW, lead to high $T_{e,\text{PED}}$ (up to $\sim 1\text{keV}$) and $H_{98(y,2)}$ (up to 0.9). A scan with neon varied shot to shot shows that the neutron rate increases with Ne. In the range investigated, type-I ELMs change to no ELMs at the highest radiative fractions, with stationary conditions and $H_{98(y,2)} \sim 0.9$, $\beta_N \sim 2.2$, Greenwald fraction $\langle n \rangle / n_{\text{GW}} \sim 0.68$ and neutron rate = $1.4 \times 10^{16}/\text{s}$ until the end of the heating (Fig. 5). In contrast to previous experiments where N_2 seeding led to better performance than with Ne, new comparisons at $P_{\text{NBI}} = 28\text{MW}$ show that Ne seeded plasmas achieve higher $H_{98(y,2)}$ and neutron rates for the same plasma energy. This is due in part to the higher $n_{e,\text{PED}}$ (lower $T_{e,\text{PED}}$) for plasmas with N_2 . Gyrokinetic modelling is on-going to determine whether core confinement is also improved. The well diagnosed discharges are used for validating physics-based scrape-off layer (SOL) - edge modelling. Fair agreement with the experiment is obtained for divertor target profile and radiation distributions [34], increasing confidence in ITER divertor design basis and strengthening the case for choosing Ne over the chemically reactive N_2 for ITER. This scenario will be performed in the coming tritium and D-T campaign - the first time for seeded plasmas - to identify the impact of isotope and mixed species on the divertor and edge plasma, where this is expected to play a role in detachment mechanisms, radiation distribution, divertor compression and power exhaust, and on the pedestal and core.

3. Impact of plasma species and isotope mass

Isotopic effects were observed in DTE1 and impacted progress towards high fusion, e.g. [3],[35]. To better prepare for DTE2 and to provide the physics basis needed to predict ITER, a series of campaigns with different hydrogen isotopes, H (2016 with H-NBI and 2020 with RF-only), D (2018-2020) and T were performed. The experiments are designed with help of theory-based modelling, to address specific physics questions and disentangle the mechanisms affected by isotope mass in the core, pedestal, SOL and plasma-wall interaction, and to clarify the role of parameters that will differ in ITER (e.g. rotation, divertor conditions). Selected results are reported below. It is worth noting that some results when changing isotope mass could not be reproduced by simplified turbulence models (e.g. quasi-linear approximation) and needed fully non-linear simulations, thus

indicating the need for improved reduced models, correctly taking into account the impact of isotope mass.

3.1 Core and pedestal transport and confinement

By exploiting the change in isotope mass, $A = m_i/m_p$, NBI-heated L-mode and type I ELMy H-mode plasmas at moderate β were obtained in JET-ILW in H and D, with similar profiles of the dimensionless plasma parameters ρ^* , v^* , β , q , and similar Z_{eff} , T_i/T_e and Mach-number profiles [36]. In the core confinement region the dominant instabilities are ITG modes both in H and D. The dimensionless thermal τ_E ($\Omega_i \tau_{E,\text{th}}$) is identical in the L-mode isotope identity pair, indicating lack of isotope mass dependence of the dimensionless $\tau_{E,\text{th}}$, and the invariance principle is satisfied in the core confinement region [37]. In the type I ELMy H-mode pair, similarity in H and D is found for both core and pedestal for the ELM-averaged profiles, but not for the pre-ELM profiles. $\Omega_i \tau_{E,\text{th}}$ is not identical in the H-mode pair and yields an isotope mass dependence $\Omega_i \tau_{E,\text{th}} \sim A^{0.51}$, consistent with the favourable isotope mass scaling of the dimensional $\tau_{E,\text{th}}$ observed in JET-ILW [113,114]. Predictive flux driven simulations of core plasma transport with JETTO-TGLF (L-mode pair) and TRANSP-TGLF (H-mode pair) are in agreement with the experiment for H & D: the stiff core heat transport, typical of JET-ILW NBI L-modes and NBI H-modes at moderate β , overcomes the local gyro-Bohm (GB) scaling of gradient-driven TGLF, explaining the lack of isotope mass dependence in the core region of the L-mode plasmas and the increase of confinement with isotope mass in the H-mode plasmas, originating in the pedestal region. The effect of ExB shearing from sheared toroidal rotation on the predicted core heat and particle transport channels is negligible in the low β and low momentum input L-mode plasmas, while it becomes apparent in the H-mode identity pair at moderate β .

Observations that the impact of isotope on H-mode plasmas comes mainly from the pedestal [37] motivated recent gyrokinetic (GK) theoretical investigations of JET pedestals showing that the toroidal branch of the ETG instability can be driven at ion-scale poloidal wavelengths and may be responsible for significant inter-ELM pedestal heat transport [38].

In some regimes (high FI content, beta and rotation), isotope effects on core plasma may become important [39]. Recent experiments in D_2 and H_2 L-mode plasmas studied the isotope dependence of ion heat transport by determination of the ion critical gradient and stiffness through varying the IC resonance heating power deposition. Core GK modelling applied to these experiments show that, in plasmas with a strong stabilizing effect of fast particles, differences in fast particle content with isotope mass may lead to strong deviations from the GB scaling of core

transport. The difference between H and D is attributed to the differing FI pressure gradient, in turn due to different heating deposition and FI slowing down time [40]. Experiments are being prepared for the tritium and DTE2 campaigns, designed to disentangle the effect of isotope mass and of α on core confinement, and the role of plasma rotation.

Isotope effects on intrinsic rotation was investigated by comparing the rotation of the main ion in H and D discharges. Density scans in H and D were performed for the study of rotation reversals, at 2.7T and $I_p = 1.7\text{MA}$ & 2.3MA, and at 1T/0.9MA to provide a match for a JET-DIII-D similarity experiment. This led to the first clear observation of rotation reversals in a large tokamak. The phenomenology is similar in H and D, however the critical density for reversal and the magnitude of the core rotation depends on isotope, with stronger co-current rotation and larger rotation gradients in H, but with deeper counter-current rotation in D. Linear GK calculations (TGLF [41] and GS2 [42]), show that the low density rotation reversal occurs close to the density of transition from dominant TEM to ITG instabilities, but the sign of rotation shear cannot be associated to a particular type of instability, since peaked rotation profiles can be observed with either ITG or TEM. NL calculations with the low-flow model in GS2 [43] reproduce changes of sign in rotation gradient consistent with the observation of peaked and hollow profiles, though the modelled rotation shear is lower than measured [44].

Comparison of recently developed ICRH-only H-mode plasmas with mixed ELMs, with low input torque and dominant e-heating, to their NBI-only counterpart at same total power shows similar global confinement and temperature profiles. The ICRH-NBI identity pair have matched dimensionless profiles of q , ρ^* , v^* , βn and T_i/T_e within 5% except in the plasma core ($\rho_{\text{TOR}} < 0.3$). The most significant difference is the n_e profile, twice as peaked for the NBI plasma as for the ICRH one. The normalised n_e gradient length R/L_n averaged over $\rho_{\text{TOR}} = 0.4-0.8$ is $R/L_n = 0.93$ and $R/L_n = 0.45$ for the NBI and ICRH case respectively. Still to clarify is whether the n_e peaking can be explained by NBI fuelling or whether this depends on changes in particle transport [45].

Mixed isotope (H-D) experiments [46] were extended to 2.3 MA and 2.3T to include vertical kicks for the control of f_{ELM} and thus ensure similar pedestal conditions. At constant gas and power, the thermal stored energy depends linearly on the effective mass across the probed effective mass (m_{EFF}) from 1.0 to 2.0, in contrast to earlier results at 1.4 MA and 1.7T [46] which showed a dependence on the m_{EFF} only at the extremes of the scan, i.e. close to full purity of H and D, respectively. Detailed analysis is ongoing to pinpoint the reasons for the differences.

Control of the plasma H:D isotope mix using solely shallow pellets (in H or D) was demonstrated in recent

experiments, attaining 50%/50% H/D ratio [47]. The isotope mix propagates to the core on the confinement timescale, in agreement with quasilinear theory [48]. Analysis of the dataset for different pellet sizes, content and plasma current, and including for the first time pellets with ITER-like ablation and relative pellet size, indicate high efficiency for pellets with ablation depth $r/a < 0.95$, but falling sharply for shallower pellets.

3.2 Plasma edge and divertor

A variety of studies of the low to high confinement transition (L-H) have been undertaken at JET since the installation of the ILW. They are summarised in [49]. Here we highlight the recent results in helium plasmas, compared to protium and deuterium plasmas. In JET-C, studies of the L-H power threshold in He plasma had concluded that $P_{L-H}(\text{He}) = 1.4 P_{L-H}(\text{D})$ [118], while ITER modelling concluded that the electron density at which the L-H transition power threshold is minimum, $n_{e,\text{min}}$, was the same for H, D, He. New L-H transition studies in the JET-ILW allow a comparison of L-H power thresholds for H, D and He for plasmas with 1.8 T, 1.7 MA, in a horizontal target (HT) configuration. The new experiments show a clear shift in $n_{e,\text{min}}$. In terms of the Greenwald fraction (f_{GW}), $n_{e,\text{min}}(\text{D}) \sim 0.4 \times f_{\text{GW}}$, while $n_{e,\text{min}}(\text{H}) \sim 0.5 \times f_{\text{GW}}$, and $n_{e,\text{min}}(^4\text{He}) \sim 0.6 \times f_{\text{GW}}$. The shift in $n_{e,\text{min}}$ is clearer when plotted in terms of the loss power $P_{\text{LOSS}} = P_{\text{OHM}} + P_{\text{AUX}} - dW/dt$, where P_{OHM} is the Ohmic power, P_{AUX} is the auxiliary heating power and W is the plasma energy. However, it is also observed when plotted in terms of the power across the separatrix, $P_{\text{SEP}} = P_{\text{LOSS}} - P_{\text{RAD,Bulk}}$, where $P_{\text{RAD,bulk}}$ is the power radiated from the main plasma. In terms of the power threshold itself, for the so-called high density branch, $n_e > n_{e,\text{min}}$, $P_{\text{SEP}}(^4\text{He}) = P_{\text{SEP}}(\text{D})$ is found. Thus the increase in the predicted P_{SEP} for ITER due to higher $n_{e,\text{min}}$ could be compensated by the lower power required to access it, no longer $1.4 \times P_{L-H}(\text{D})$. This would be the case provided radiation is not dominant in helium plasmas in ITER, as it is in JET-ILW.

The formation of the edge transport barrier in a ^4He plasma has been investigated with the four-field drift-fluid model HESEL [119],[120]. Experimental profiles from a helium pre-transition state were used. The edge ion temperature is raised artificially to obtain a transition to an H-mode like confinement with significantly reduced turbulent heat transport across the last closed flux surface. The transition in He is more gradual than in D, because neo-classical transport in helium is comparable to the turbulent transport level.

For the plasmas at higher magnetic fields, Doppler reflectometry allows us to study the evolution of v_{\perp} shear (related to the radial electric field (E_r) shear) along the power ramp [121]. It is found that no significant increase of v_{\perp}

shear is observed preceding the L–H transition. Instead the contribution of the diamagnetic velocity to the radial electric field increases by up to a factor of 2 along the power ramp. This suggests that the mean E_r may well not be the critical variable determining the L–H transition. Detailed investigation of the dynamics of these transient H-modes is underway, and further experiments are planned.

3.3 Plasma edge and divertor

Dedicated experiments in combination with an extended database of unseeded low δ discharges spanning $1.5 < I_p < 3.4\text{MA}$, $10 < P_{\text{NBI}} < 25$, $2 < P_{\text{ICRH}} < 5\text{MW}$ with $q_{95} = 3\text{-}3.4$ demonstrated the importance of the divertor outer target electron temperature ($T_{e,\text{ot}}$) as a key parameter linking the recycling particle source and detachment to plasma performance. In particular, changes in global and edge plasma parameters ($H_{98(y,2)}$, v^* , n_e peaking and separatrix n_e ($n_{e,\text{sep}}$)) with variations in D_2 fuelling rate and divertor configuration are condensed into a single trend when mapped to $T_{e,\text{ot}}$ (Fig. 6). This is attributed to the relationship between $T_{e,\text{ot}}$ and $n_{e,\text{sep}}$, which for the database can be recovered quantitatively using the SOL 2-point model (2PM) [50], and crucially depends on estimates of the volumetric loss factors capturing pressure-momentum and plasma cooling losses in the SOL-divertor [51]. The increase in edge plasma collisionality associated with increasing $n_{e,\text{sep}}$ is correlated with reduced $T_{e,\text{ped}}$ and $T_{e,0}$ via profile stiffness, as well as a decrease in the core n_e peaking, leading to a reduction in the core pressure and confinement, consistent with previous v^* scans of low δ H-mode JET-ILW plasmas [52]. Additionally, a favourable $p_{e,\text{ped}}$ scaling with I_p is shown in accessing high-recycling (low $T_{e,\text{ot}}$) conditions leading to an increase in $p_{e,\text{ped}}$ with D_2 fuelling at high I_p , although this is evidently not sufficient to lead to $H_{98(y,2)}$ recovery. Further investigations into the role of edge plasma neutral opacity on the pedestal structure are ongoing, with a focus on quantifying the confined plasma fuelling contributions from recycling sources in the main-chamber and divertor.

3.4 W and Be erosion, transport and screening

JET-ILW provides the most relevant environment for studying Be & W erosion and transport and their implications for ITER operation, plasma-facing components lifetime and T retention by co-deposition. Recent experiments focussed on investigating the impact of different hydrogen isotopes on physical sputtering of Be and W, as well as of molecular release (BeH, BeD, BeT) through chemically assisted physical sputtering (CAPS). Full suppression of CAPS at the Be bulk limiters was observed in dedicated experiments in H and D in a similar range of surface temperature of $\sim 450^\circ\text{C}$, complementing earlier D experiments [53], with an improved set of diagnostics

including 2D cameras with narrowband interference filters (incl. BeI and BeII) for characterising Be erosion and transport and validating plasma backgrounds used as input in plasma-wall interaction codes like ERO2.0 [54]. Correlation between suppression of CAPS (BeD/BeH) and D/H outgassing is clearly demonstrated and confirms predictions [55]. ERO2.0, which includes a detailed 3D surface model of JET first wall and divertor components [56], was recently improved [57] with multiple diagnostic sightlines of first wall areas where peak erosion measured, or that are shadowed, for validation using localised wall erosion results and the local Be plasma content.

An overview of W gross and net erosion rates at the bulk W outer divertor target plate and high local redeposition of 95% is given in [58] by comparing optical emission spectroscopy and post-mortem analysis and separating inter- and intra-ELM phases. ERO modelling for the inner and outer divertor W erosion helped disentangle the local redeposition in the inter/intra-ELM phases and the loss paths of W escaping in the confined plasma and SOL [59]. Intra-ELM W gross erosion, which dominates the total W source, were quantified in the inner and outer divertor in dedicated D experiments in three different divertor configuration in ELMy H-mode plasmas [60]. The quantity of sputtered W atoms per ELM depends on f_{ELM} , confirming earlier studies [61], with eroded W atoms/s increasing with f_{ELM} to a maximum at 50–55 Hz, and decreasing at higher f_{ELM} . At low f_{ELM} (~35 Hz), the outer divertor W source is larger by ~1.5 compared to the inner divertor, but the in/out asymmetry decreases with f_{ELM} and is nearly symmetrical for > 70 Hz. Divertor screening of W in the more open magnetic configuration (S-P on the horizontal divertor plates) is ~1.7 higher than that with S-P at the far corner, near the pumping duct entrance. Modelling of W transport in JET SOL with EDGE2D-EIRENE and DIVIMP [62] shows that accurate predictions of W density needs a good match to the experimental pedestal and SOL, and that incidence angle, surface roughness, material mix, and W prompt re-deposition must be taken into account to reproduce the measured W I, W II emission. The modelling suggests that sputtering by energetic CX fuel atoms near the top of the outer vertical divertor (where divertor screening does not apply) could contribute significantly to the W influx in the confined plasma in L-mode and inter-ELM phases.

3.5 First tritium plasmas results

The first part of the full T campaign (Ohmic or with ICRH), i.e. first experiments with tritium since 1997, took place at the end of 2020. Results included confirmation that the hybrid plasma current ramp-up and q-profile is impacted by isotope mass as shown in recent H-D experiments reported in [63]. The higher W sputtering and improved transport in T plasmas with same engineering parameters as

their D counterparts leads to hollow electron temperature profile thus modifying the q-profile shape and evolution. The optimal q-profile at the end of the I_P ramp-up can be recovered by adjusting the gas and density waveforms, as predicted based on empirical extrapolation and modelling.

L-H transition experiments in tritium plasmas were executed in plasmas with ICRF, showing a power threshold in tritium higher than in comparable ICRH heated D plasmas, inconsistent with previously observed inverse mass scaling of $P_{\text{L-H}}$ [49], this will be investigated further in T plasmas with T-NBI, as part of the dedicated 2021 tritium campaign.

4. Disruption mitigation and avoidance

4.1 Disruption and runaway electrons studies with JET SPI

JET makes a unique contribution to ITER disruption mitigation preparation thanks to its size, plasma energy and current, as well as its first wall materials and the recently installed SPI. The JET SPI was successfully commissioned and exploited in an extensive set of experiments on disruption and runaway electrons (RE) avoidance in 2019-2020, with the JET SPI demonstrating good reliability. This work is done in an international collaboration between ITER organization, US DOE, EUROfusion and JET Operator. Main characteristics of the JET SPI system include a three-barrel injector capable of delivering Ne, D, Ar and mixed pellets, and the possibility to vary the fired pellet velocity, and correspondingly the shards size and speed [1] with the unique feature of a vertical SPI mounting & injection with shatter plume aimed toward the plasma. Key diagnostics for these studies included fast cameras (with various filters) observing different octants [Fig. 7].

The JET SPI experiments results are presented in [64]. A first set of experiments demonstrated reduction of the thermal load, with complementary experiments with SPI injection into 3MA / 7 MJ H-mode plasmas providing a unique dataset for ITER in terms of magnetic and thermal energy [65]. By varying the neon content in the SPI pellets, the disruption current quench time can be controlled efficiently in JET, covering the range required by ITER. The pellet integrity and size has only a minor impact on the current quench duration.

RE suppression with high Z impurity SPI was also demonstrated. It was found that D2 SPI applied to a high current run-away beam formed by Ar MGI leads to benign impacts on the wall, suggesting a potential new solution for RE control in ITER [66]. Further RE studies investigated the efficiency of RE dissipation in these conditions. In particular, the trigger of the final instability was characterized with a q-scan at constant I_P (1.5MA), showing that $q=2$ is not a necessary condition for the harmless collapse of the RE

beam. RE beams of up to 1.5MA could be safely terminated by sustaining the beam for more than 2.6s and with controlled Ip ramp-down, thanks to the D₂ SPI. This was also shown for the ITER relevant scenario of a vertically moving beam.

The models required to interpret JET SPI experiments and predict ITER continue to be improved. Recently the thermal energy balance analysis was greatly enhanced, with forward modelling accounting for 3D helical structures (Emis3D) [67]. Modelling with KPRAD [68] accurately reproduced the cooling times measured and the current quench duration at high thermal energies. Simulations of JET SPI with 3D MHD codes JOREK [69] and with M3DC1 [70] are ongoing, with recent JOREK results qualitatively reproducing the radiation pattern before the thermal quench [71]. JOREK predictions show that injection from toroidally opposite locations could mitigate asymmetric radiation behaviour observed during single SPI injection [72].

4.2 Disruption avoidance during scenario development

Disruption avoidance based on improved termination techniques and real-time (RT) detection of unhealthy plasmas with jump to controlled termination was an intrinsic part of the scenario development for DTE2 [112]. This reduced significantly the disruption rate in hybrid plasmas (down to 5% for plasmas >2.0MA) and contributed in the 3MA baseline plasma to a reduction from 60% in 2015-2016 to 20% at the end of the 2020 campaign. However, the disruption rate of baseline plasmas ≥ 3.5 MA increased from 33% up to 70%. Most of the disruptions take place at lower I_p than during flat top, i.e. during ramp down. The reasons are under investigation. Recently developed tools were tested in RT to respond to two main causes for disruption: 1) core W accumulation which can lead to hollow T_e profiles, developing relatively slowly towards disruption, 2) poloidally asymmetric radiating blob building up on the outboard side and increasing in intensity until disruption. How these lead to disruption is now well understood [73]. Detecting hollow T_e can be done with ECE or soft X rays and both are used routinely but, for the latter, care needs to be taken to separate outer blob from core accumulation. Recently a method of inverting bolometric data real time has been developed [74] and implemented which allows the radiation in particular regions of interest to be calculated and used with a simple threshold or normalised to input power to trigger different responses to core and edge radiation: use of high H minority concentration ICRF which favours core electron heating, or RT control of power relative to model H-mode threshold.

5. Preparation for tritium and D-T operations

The preparation for operations with tritium and D-T involved several refurbishments and enhancements over several years [124]. This section reports the final steps of the preparation and commissioning.

5.1 Tritium neutral beams optimisation

The JET tritium and deuterium-tritium campaigns rely on very high-power tritium neutral beam injection (NBI) in order to achieve their scientific objectives. NBI commissioning in tritium was aimed at reliable operation with maximum power and as little gas usage as possible. The system has been optimised in terms of beam perveance and neutralisation efficiency and the resulting beam species mix measured.

Preparation for operation with tritium is complicated by the need to supply tritium to the injectors at ground potential, so as to be compatible with double containment of the feed lines. In JET, this is achieved by feeding tritium at the position of the earth grid in the injector rather than having separate feed points in the ion source and the neutraliser cell, as is used in normal deuterium and protium operation. Tests of ‘grid gas feed’ in deuterium showed positive results already in 2019 with the same power achieved as with ‘normal feed’. This has now been repeated with tritium and the optimum gas flow rate determined experimentally. As an operational bonus, the optimum gas flow rate in tritium is about 30 mbar-l/s, considerably smaller than the 40-42 mbar-l/s used for deuterium beams.

A benefit of operating the beams in tritium, due to the lower particle velocity at higher mass, is that the beam neutralisation efficiency does not decrease strongly as the maximum beam voltage (and therefore power) is approached. This means that the tritium beams will be able to operate at power levels at or above those already achieved in deuterium (Fig.8).

5.2 Tritium processing plant

The tritium and deuterium-tritium experiments planned for 2021 require a significant increase in the capability of the tritium plant – the Active Gas Handling System (AGHS) [122], [123] – as compared to the JET DTE1 experiments in 1997. Whereas in DTE1, T was supplied to one neutral injection box (NIB) and one dedicated gas injection module, the present experiments will at various times use T from both NIBs and from five new, high-flow T injection modules. Overall, it is expected that about 1000 g of T will be supplied to JET, recycling an on-site inventory of 70 g. This is compared to an inventory of 20 g during DTE1 and total fuelling of 100 g. By Feb 2021, AGHS had already supplied more T to JET than was supplied in the entirety of DTE1. AGHS consists of 12 interconnected subsystems, which feed, recover and reprocess tritium in a batch process (Figure 9). To keep up with the experimental schedule, AGHS must

operate 24 hours a day, 7 days a week. The limiting factor for tritium throughput rate is isotope separated by the Gas Chromatography (GC) subsystem, which is capable of processing up to 90 bar-l of hydrogen per day. Not having been used for operations since the Trace Tritium Experiment in 2003, AGHS required extensive recommissioning and enhancement. In addition, a major failure of the Exhaust Detritiation System (EDS) in 2017 required its complete replacement. Procuring, installing and commissioning the new EDS set the critical path for meeting the Ready for Tritium Operation operator milestone. The milestone, which included active recommissioning of all subsystems once EDS was again available, was met on September 4, 2020.

5.3 Core charge exchange enhancement and final neutron calibrations

CX spectroscopy of the fuel ions provides a complementary measurement to impurity spectroscopy. Both are complex measurements and face challenges in high density plasmas where beam attenuation is significant. The low levels of intrinsic C together with multiple interfering W lines [75] in JET-ILW mean that seeding of the plasma with trace levels of Ne is required for impurity measurements. On the other hand, the strong intrinsic emission of edge $D\alpha$ light and the overlapping Stark spectral features from multiple injectors on JET means that beam modulation is needed for the fuel-ion measurement. The upgrade project (2016 shutdown) installed two pairs of spectrometers sharing the same lines-of-sight with a dichroic mirror splitting the light to the two instruments at 600nm, allowing simultaneous measurements of impurity and hydrogen CX from the same active volume [76]. The improved capability allows the plasma and impurity parameters to be compared, taking into account features such as fine-structure splitting in the impurity spectra and demonstrating good agreement between the two measurement techniques, with no significant neoclassical temperature differences [77]

As part of a major upgrade of JET's neutron and gamma diagnostics, a calibration of the measured 14 MeV neutron yield has been carried out using both a neutron generator deployed on JET's in-vessel remote maintenance system [78] and, more recently, short puffs of T into D plasmas. Historically, 14 MeV neutron production has been measured on JET using a system of silicon diode and diamond detectors [79]. The silicon diode detectors degrade under neutron irradiation and require regular replacement. For DTE2, expected to produce record levels of neutron generation, two new silicon detectors and four single crystal diamond detectors have been installed, providing resilient, radiation hard 14 MeV neutron monitoring over a large dynamic yield range. The recent plasma calibration was aimed at cross-calibrating the monitoring fission chambers, the newly installed silicon/diamond detectors and the JET's

activation system, which provides absolutely calibrated measurements of pulse-integrated neutron yield. Excellent correlations have been measured between the different 14 MeV detectors (Figure 10). The absolute yield has been determined from the $Al(n,\alpha)$ and $Fe(n,p)$ dosimetry reactions and calibrations applied to the detectors in time for the beginning of JET's tritium campaign.

5.4 D-T rehearsal

Experiments with tritium are subject to a range of additional boundary conditions and requirements. Programmatically, the most important of these are the overall 14 MeV neutron budget of 1.55×10^{21} and the safety case limitation that no more than 44 bar-l of tritium may be accumulated on the torus and NIB cryogenic pumps. Experiments thus must make optimum use of the machine time available. Planned T and DT discharges have been rehearsed in deuterium or protium plasmas so that development in tritium is minimised and ideally limited to exploring the differences introduced by the tritium itself or alpha particle effects. Experiment planning and approval has also been tightened with individual pulses requiring approval rather than campaign sessions.

A series of rehearsals of the operational and programmatic procedures for use in tritium have been carried out (without the use of tritium). The first, in 2016 [Belonohy et al., Fusion Eng. Des. 123 (2017) 196-200], was largely technical. High power NBI operation with tritium-compatible fuelling was demonstrated and the commissioning of various safety systems was started. A subsequent rehearsal in 2020 included also rehearsing the procedures for performing experiments with tritium. The high-level objectives for this second rehearsal are given in Table 1.

A lessons-learnt exercise was carried out after the rehearsal, with 152 issues raised. The issues were then rationalised, categorised, and prioritised. Sixty issues were judged to require no further action (these included duplicate issues and issues addressed immediately after the rehearsal). The remaining 92 issues were then actioned. **At the time of writing (March 2021), only four actions remain open, and all are in the final stages of completion. None are impeding the execution of the JET tritium campaign.**

5.4 Wall cleaning and isotopic and plasma species content monitoring

A strategy to remove D from PFCs was successfully tested prior to the T campaign and brought the plasma isotopic ratio $D/[H+D+T]$ below the 1% target set by the T campaign 14 MeV neutrons budget, reported in [156]. It consisted of main chamber baking under vacuum at 320°C, followed by isotopic exchange with Ion Cyclotron Wall Cleaning (ICWC)

and Glow Discharges (GDC) in H₂ at that temperature. Diverted plasmas with P_{ICRH} = 5 MW lasting 20 s were then operated in different magnetic configurations with the main chamber at 200°C, targeting the inner divertor baffle region. ~9x10²³ D₂ were removed from JET PFCs, as determined by gas chromatography, mass spectrometry and optical Penning gauges, of which ~54% by baking and 41% by ICWC and GDC, and the rest by plasma cleaning. A similar sequence will be used after DTE2 with D plasmas aiming to reduce the exhaust T to <1%, providing an assessment of the tools foreseen for T removal or mitigation of inventory build-up in ITER.

To complement the edge and exhaust spectroscopy diagnostic during plasma experiments, the isotopic ratio can be inferred from neutrons diagnostics when including the measured profiles and FI calculations [81]. A workflow using new tools such as ASCOT [82] coupled to JETPEAK [83],[84] with a new interface provides daily analysis and trends of isotope content, as well as fast D-T predictions and EP analysis to guide experiments.

6. Plasma facing components (PCF) after long term exposure in JET with ILW

Regular retrieval of plasma-facing components (PFC), erosion-deposition probes (EDP) and dust particles performed during shutdowns after each of the three ILW campaigns has provided representative set of specimens for ex-situ studies and – as a consequence – allowed for a deep insight into material migration including fuel retention and dust generation. This comprised research on tiles from the poloidal cross-section of the divertor, both W-coated (Tiles 0; 1; 3; 4; 6-8) and bulk tungsten Tile 5 as well as all major categories of limiters: Inner Wall Guard (IWGL), Outer Poloidal (OPL) and Upper Dump Plates (UPD). In addition, several types of studies have been performed for the first-time ever in connection with a clear interest and direct request from ITER: metallography and mechanical analyses of Be and W tiles, and also assessment of dust and tritium accumulation on the equipment for remote handling (RH). The overall aims were: (i) to obtain a comprehensive erosion-deposition pattern before the planned D-T campaign; (ii) to provide basis for the best-possible predictions for ITER regarding the melt damage of bulk Be and W tiles, tritium inventory and the modification of diagnostic test components.

6.1 Material migration and fuel retention

Figure 11-a shows a castellated beryllium limiter from the inner wall, while in **Figure 11-b** there are deuterium deposition profiles on the IWGL determined after three single campaigns (ILW-1, ILW-2, ILW-3) and a profile on the tile exposed during all of them [PWI1,2]. There are some

common features. Qualitatively and quantitatively all profiles are of the same character indicating: (i) the erosion zone in the central part of the limiters where the content of D atoms does not exceed 0.1x10¹⁸ cm⁻²; (ii) deposition zones at the curved sides with the D concentration reaching maximum of 1.4x10¹⁸ cm⁻². Even those highest values of inventory are very low both in absolute and relative terms when either extrapolated to tritium retention in 1:1 D-T operation (35 mg T m⁻²) or compared to JET-C where fuel contents in some areas was over two orders of magnitude greater than in JET-ILW [PWI3,4].

Microscopy images and X-ray spectra in **Figure 12a-d** show features of the co-deposits and dust from the deposition zones on the limiter, in spots A and B marked with circles. These are the first results for co-deposits sampled directly from the Be limiters. The sampling with sticky pads resulted in the isolation of only tiny quantities of the co-deposit (low µg range) thus indicating good layer adherence to the Be substrate. This confirms earlier results from visual inspections of the tiles. The layers are not uniform in terms of structure (granular in **Fig. 12-a** and stratified in **Fig. 12-c**) and composition with the presence of Be, C, N, O and metals such as Ni and W. **Figure 12-c** shows splitting of the strata leading to the increased porosity of the layers. There are also places containing a mesh-like Be-Ni structure clearly visible in the backscattered electron image, **Figure 12-d-e**.

The deposition of D, Be and C on the divertor tiles in the three ILW campaigns is shown in **Figure 13**, with corresponding distribution of strike point location and duration in a given position [PWI8]. In all three campaigns, the patterns are very similar with most deposition on the inner divertor Tiles 0 and 1 [PWI5-13].

Some differences are related to the strike point positions, especially in the last phase of the operation in respective campaigns. For ILW-2 and ILW-3, when strike point positions were often on Tiles 4 and 6, the D content on that region is lower in comparison to that in ILW1, likely due to higher peak surface temperature of the tiles during those campaigns. In areas of high temperature (T ~1400 K) [PWI14] almost no deuterium has been found. Other species detected in the analysed layers are mainly on Tiles 0 and 1 are: nitrogen from N₂ puffing and oxygen connected partly with in-vessel impurities and Be oxidation when exposed tiles were in contact with atmospheric air. The most important is a significant reduction, by a factor of 2, of carbon deposition from campaign-to-campaign both in terms of the absolute amount and accumulation rates. The relatively high C content in ILW-1 could be attributed to the residual carbon impurities remaining from JET-C and surface contaminants on the W-coated tiles. In summary, all data confirm earlier results regarding reduced material deposition and retention of hydrogen isotopes in comparison to that in JET with carbon walls (JET-C). This also clearly indicates

that W coatings on the ILW divertor tiles were not seriously damaged and, therefore, plasma was not in contact with the carbon substrates.

The deposition localized in the upper part of inner divertor is in contrast to results observed in JET-C, where co-deposits were formed mainly on shadowed parts of Tiles 4 and 6 [PWI3]. This is due to different erosion mechanisms of Be and C by hydrogen atoms and – as a consequence – differences in transport of eroded species through the divertor. Carbon has a high chemical erosion rate and could be transported in a multistep process towards shadowed regions in the divertor, while Be erosion rate by D is lower as the element is not susceptible to purely chemical erosion processes [PWI15]. As a result, eroded Be atoms mostly remain in the area where they were first re-deposited from the scrape-off-layer (SOL). However, despite that fact, some quantities of beryllium reach shadowed regions in the divertor, as detected in studies of wall probes located in the divertor: test mirrors and [PWI16-18], spatial blocks [PWI19], rotating collectors [PWI20-22], louvre clips [PWI23] and covers of quartz microbalance [PWI7,19].

6.2 Material modification by heat loads

6.2.1 Investigation of damaged Beryllium upper dump plates. Beryllium melting and splashing was examined for a number of the upper dump plates (UPD) [PWI24]. Emphasis was on the identification of factors triggering this process. High-resolution images have documented flash melting on the ridge of the roof-shaped tiles, as documented in **Figure 14-a**. The melt layers moved in the poloidal direction towards the outboard tiles. At the end of the last tile (UPD-8) the molten matter moved upwards forming a flake of a waterfall-like melt structure. The general appearance and details of that structure are shown in **Figure 14-b-e**. In close-up images of the top surface, one perceives numerous Be droplets ranging in size (diameter) from micro- to millimetres. Detailed imaging provides a clear evidence of multiple melting and cooling cycles responsible for the layered sub-structure of the flake (**Figure 14-c-d**). There are a few main strata ranging from 60 μm to 500 μm in thickness, thus clearly indicating the link to several high-power events. Further structural details are in the electron microscopy image, **Figure 14-e**. During three ILW campaigns around 15% of all 12376 plasma pulses were catalogued as disruptions. The undisputed reason for melting were unmitigated disruption events which tend to move the melt layers in the poloidal direction resulting in the formation of upwards going waterfall-like structures of molten metal. The halo current is believed to provide the $j \times B$ force driving the melt layer motion. The total material losses from all dump plates were estimated at the level of 129 g during ILW2 and 55 g in ILW3. The estimation was based on: (i) precision weighing of some retrieved tiles and

(ii) computer-assisted analysis of high-resolution images documenting splashes on the upper walls. It is stressed that splashed beryllium droplets adhere well to surfaces where it was deposited thus not contributing to dust formation dust in ILW. This is consistent with a very low dust inventory: approximately 1 g per ILW campaign with 19-23 h of plasma operation [PWI6,25,26]. In addition, no mobilization of Be dust was caused by remotely handled (RH) equipment operated during the shut-down period [PWI27].

Morphological analyses of the molten material revealed the presence of Be and BeO with some heavy metal impurities Ni, Fe, W. Using ion beam analysis (IBA) deuterium concentration on the melted areas of DP-8 was determined, both in toroidal and poloidal direction ($1.1\text{-}2.1 \times 10^{17} \text{ cm}^{-2}$) and slightly increased amount ($3.0\text{-}4.0 \times 10^{17} \text{ cm}^{-2}$) in the areas less affected by melting phenomena. The high surface temperature during melting is likely to result in the release of trapped D thus explaining the variation between melted and non-melted areas. Similar results were seen on the Be waterfall structure on both front and bottom sides, with D concentrations in the range $1.1\text{-}6.3 \times 10^{17} \text{ cm}^{-2}$. In summary, the results clearly show low fuel content on the upper dump plate and Be waterfall-like structure which comprise both the non-damaged surfaces and the re-solidified ones, with no excessive trapping of fuel in the melt zone.

Modelling of Be melting under fast transient events with MEMOS-U [94] indicate it can reproduce the key physical processes involved. Qualitative agreement with post-mortem findings from dust collection and Be deposition pattern near the UDP is obtained with DUSTRACT [95,96].

6.2.2 Divertor bulk tungsten tiles Bulk tungsten tile (Tile 5) in the divertor base is composed of four stacks (A-D) each containing 24 rows of lamellae. Thermal loading to respective stacks and lamellae within a stack is not uniform. Elements 1-5 are shadowed by the adjacent tile, while loading increases towards the other end of the tile with the greatest load on lamellae from rows 23 and 24. Comparative studies were performed on elements of Stack C (Row 14 and 23; notation C14, C23) with the longest time of strike point location and, on Stack A (Row 14, notation A14) with no strike point location, as shown in **Figure 13**. Lamellae after ILW-1 and ILW-2 were examined to determine the surface topography, metallography and mechanical properties [PWI26]. These bulk tungsten components are produced using electro-discharge machining (EDM) without subsequent surface treatment. As a result, the surface is characterized from the beginning by a micro-crack network with a crack depth of up to $\sim 50 \mu\text{m}$ and average roughness R_a of $\sim 2 \mu\text{m}$. Micrographs of surface topography and cross section of the lamellae from Stack A and from the middle part of Stack C (Row 14) have proven that thermal loading

applied during ILW-1 had no clearly measurable or visible effect on the surface roughness and the micro-crack network, as shown in **Figure 15(a)** and (b) for a piece from Stack C, Row 14. Differences in surface and bulk features become evident with the increased power loads, as documented for piece C23, **Figure 15 (c)** and (d). One perceives that under high power loading a shallow surface melting and melt motion occurred [PWI28,29] and, as a result, the average surface roughness has been decreased by 30% from 2.2 μm for C14 to 1.4 μm for C23 [PWI28]. Below this slightly smoothed surface an increase in the crack depth up to $\sim 150 \mu\text{m}$ is observed. However, on a positive side it can be stated that irrespective of these changes, no modification of the materials microstructure, in particular due to recrystallization-induced grain growth, has occurred. Hardness measurements have shown higher values in the near-surface region ($\sim 100 \mu\text{m}$) when compared to the bulk by $\sim 25 \text{HV1}$ (ILW-1) and $\sim 10 \text{HV1}$ (ILW-2). This may indicate that the plasma influence on that material is associated rather with the diffusion of species arriving to the surface (mostly hydrogen isotopes) than with thermal effects. This is a tentative statement and the issue needs further detailed investigation.

6.2.3 First Mirrors tests for ITER. Optical plasma diagnostics and imaging systems in ITER will rely on metallic so-called first mirrors. Therefore, on the instigation of the ITER Design Team, tests have been carried out in JET since 2002, first in JET with carbon wall and then during three ILW campaigns [16-18,30]. Test samples have been installed on the main chamber wall and in the divertor either in pan-pipe shaped cassettes [PWI31] or in the ITER-like mirror test assembly [PWI30]. Comprehensive reflectivity measurements (total and diffuse) and surface analyses by ion- and electron-beam methods were carried out before the exposure and then after each experimental campaign. Plots in **Figure 16-a** show the reflectivity – initial and after exposure - of the divertor mirrors; the numbers in cm denote the location of test samples in the cassettes, details in [PWI18]. Images in **Figure 16- b and c** bring examples of mirror surfaces from the divertor base and the inner divertor, respectively. Their surfaces are covered by co-deposits containing D, Be, C, N, O, Ni and W. Graphs in **Figure 16-d and e** provide data for the total and diffuse reflectivity of the samples facing the plasma from the outer wall in the main chamber. Some mirrors were in so-called baffled channels tested as the possible means for mirror protection against PWI effects. The total reflectivity of all mirrors from the wall, independently on the channel type, has decreased by only 2%-3% from the initial value. This is due to the formation of a near surface layer (5-15 nm) modified by co-implantation of D, Be, C and O. This affected the optically active layer (15-20 nm on Mo) and led to the increase of

diffuse reflectivity. Neither W nor N have been found on those surface.

In summary, results obtained in ILW provide two sets of messages for diagnostic components in next-step devices. The pessimistic side is that all tests consistently show very significant reflectivity degradation of the divertor mirrors, independently on their location, because of plasma impurity deposition with Be as the main component of co-deposits. The assessed layer growth rate (2.7 pm s^{-1}) in the JET-ILW divertor is about 20 times smaller than in JET-C, but the final result is equally devastating from the optical point of view. If such effects occur in a reactor with similar intensity causing gradual reflectivity degradation during very few discharges, then neither periodic cleaning nor replacement of mirrors could be considered as an effective solution. Also the use of single crystal mirrors will not improve the situation. On the optimistic side one finds main chamber mirrors with a very small change of the total and diffuse reflectivity, as shown coherently by results of two tests with different type of assemblies housing the mirror [PWI18,31]. There are still outstanding points in mirror studies, particularly a critical assessment of cleaning methods for reflectivity recovery. It requires repetitive exposure – cleaning – exposure cycles to demonstrate effectiveness of in-situ cleaning. In parallel, efforts are to be dedicated to the design and development of mirror replacement method.

6.2.4 Assessment of dust mobilisation. As already pointed out, only very small amounts of dust were formed in JET-ILW. However, risks associated with dust mobilization and transfer outside the vacuum vessel are to be thoroughly assessed in the licensing procedures for ITER. The issue is connected to Be and radioactive matter with tritium and activation products. On the direct request from ITER, accumulation of dust on the remotely handled equipment was studied during the shutdown period following the third ILW campaign [PWI27]. The exercise carried out for the first time-ever aimed at answering three basic questions: what, how much and where on the RH arm dust was deposited? The emphasis was on the search for metal particles (especially Be and W) and on the determination of tritium accumulation at different location on the robotic arm (boom) and on the multifunctional robot (Mascot) operated in-vessel during 672 hours. The results are summarised by following points. The areal density of dust depends on the sticker location on the boom with majority on the most exposed parts, i.e. Mascot wrists. The morphology of particles is very diverse, as detailed in **Table PWI-1**. Most objects originate from the RH equipment itself: aluminium from the boom construction material, even 1000 grains per mm^2 . The most important is that the accumulation of the "fearsome" species, i.e. Be and W, is negligible. Very few small pieces of W from the coatings on the divertor tiles and only one Be-rich

flake (shown in **Figure 17**) of peeled-off co-deposits have been detected.

The contamination was assessed using a smearing survey procedure in which two cellulose-based filter papers are rubbed across the surface to be tested; one for beryllium assessment and one for tritium measurements. In general, the contamination by Be was low, $< 1.5 \mu\text{g}/\text{m}^2$ for 91% of results and $< 4 \mu\text{g}/\text{m}^2$ for all results. This is below the $10 \mu\text{g}/\text{m}^2$ threshold used at UKAEA whereby additional controls such as personal protective equipment, personal air sampling and specified working procedures are required to work with beryllium. The detection limit is $0.06 \mu\text{g}$. Also the tritium levels were on a low level between 0.8 kBq m^{-2} and 14 kBq m^{-2} , in 80% of locations below 4 kBq m^{-2} . In summary, the analyses have provided two messages. The transfer of dust formed during plasma operation to the RH arm is insignificant, i.e. particles stick well to tokamak wall components and they are not easily mobilized. The RH equipment itself may generate substantial amounts of dust and, this fact is to be taken into account in the design and construction of robots for ITER.

7. Nuclear technology: exposure to high neutron yield

7.1 Neutronics experiments

The T and D–T operations at JET are expected to produce large 14 MeV neutron yields up to 1.55×10^{21} neutrons. A nuclear technology programme has been in place at JET since 2014 to deliver the maximum scientific return from those operations through the exploitation of the high 14 MeV neutron fluxes predicted in and around the JET machine. Significant results have been obtained to date with a focus on relevance to ITER operations, which include the 14 MeV calibration of neutron yield monitors [1,2], neutronics benchmark experiments [3, 4] nuclear diagnostics for tritium breeding blankets [5], studies on radiation damage and activation measurements with supporting analyses for fusion materials [6,7], and collection of data on safety and waste production [8,9]. The experimental data expected to be retrieved will help to develop and improve the prediction capabilities via benchmarking and validation studies in fusion tokamak relevant operational conditions. All projects of the nuclear technology programme are now ready for experiments in T/DT operations. Examples of recent results are given in the next sections, including recent result of exposure during the JET D campaigns, with the 2019-2020 high power campaigns providing the highest neutron yield in recent years.

7.1.1 Neutron Streaming Experiment The objective of the Neutron Streaming Experiment is to validate the calculations of neutron transport along penetrations in large shields in a real tokamak environment. The experiment comprises detectors in 22 positions varying from near the

machine to locations outside the concrete biological shield near penetrations (**figure 18**). Measurements of the neutron fluence at these locations were provided by 440 LiF thermoluminescence detectors (TLDs) placed inside high density polyethylene moderators [102]. The TLDs were exposed for significant periods of time during which the total neutron yields ranged from 3.68×10^{19} n to 5.18×10^{19} n. The neutron fluence was derived from the TLDs using an improved calibration from neutrons consistent with fusion energy spectrum [103] compared to previous experiments [97]. Also, the neutron yield data were derived from fission chambers with updated calibration as described in 5.3. The neutron fluence was calculated using the code MCNP [104] coupled with the hybrid code ADVANTG [105] (best suited for streaming studies in large ITER-like geometries) to generate optimal variance reduction parameters for each of the experimental positions. The MCNP model of JET and of the experimental set up (**Fig. 19**) was improved by including the detailed description of the polyethylene moderators and of the TLDs [100]. The comparison of the measured and calculated neutron fluence (**Fig 20**) confirms good agreement over a fluence range of six orders of magnitude, particularly for positions near the machine, though the calculations overestimate increasingly the measurements with distance, due to the lack of detailed description for the Torus Hall equipment in the MCNP model. For the four experimental positions in highly shielded positions, the results are close or below the measured background level. More accurate measurements in these positions are expected during DT campaign thanks to the higher neutron yield and energy, and to an improved background dose measurement.

7.1.2 Shutdown Dose Experiment In this experiment, active gamma dosimeters measured the dose rate around JET in a continuous way [106,107]. Calibrated spherical 1-liter air-vented ionization chambers (ICs) are installed in two ex-vessel positions close to the JET horizontal ports in octants 1 and 2. In preparation for DTE2, a third IC suitable for higher dose rates was added in octant 1 for the second part of the 2020 D campaign [107]. The dose rate measurements will be compared to predictions by a number of code packages routinely used in ITER/DEMO design analyses, such as R2Smesh (KIT), MCR2S (CCFE), R2S(UNED) and ORNL-R2S (ORNL), based on the Rigorous Two-Step (R2S) approach, and Advanced D1S (ENEA) and D1SUNED (UNED) based on the Direct One-Step (D1S) approach (see [108] and references therein).

7.2 Neutron induced activation and damage in fusion materials

7.2.1 Long term irradiation of ITER materials.

Samples of fusion relevant structural and functional materials were installed in the vacuum vessel midplane in a

specially designed long term irradiation station (LTIS) hosting two multiple sample holders, to investigate the neutron induced activation and damage in these materials. The JET and the LTIS radiation transport models were validated using data from a range of high-purity dosimetry foils irradiated inside the LTIS assemblies during the 2015–16 D campaign [109]. During the 2019-20 campaign, 27 samples of real ITER materials provided by F4E (e.g.: EUROFER 97-3 steel, W and CuCrZr materials from the divertor, Inconel 718, CuCrZr and 316L stainless steel for blanket modules, etc.), together with dosimetry foils, were exposed to 2×10^{14} n/cm² over a 147-day period. The neutron induced activity measurements identified a number of reaction products in each sample ([158] and Fig. 22), including those expected from the material composition (⁵⁸Co, ⁵⁴Mn, ⁵¹Cr, ⁵⁹Fe, ⁶⁰Co and ⁵⁷Co) as well as other products, such as ⁶⁵Zn, an impurity possibly from Cu or Zn, not listed on the material certificates. For Inconel, the reaction product ¹⁸²Ta, likely to originate from Ta impurities was also observed.

A new set of ITER materials is now under radiation in the LTIS for the T/DT campaign (Fig. 21 left). A second holder (Fig. 21 right) containing functional materials used in diagnostics and heating systems (incl. several types of alumina, diamond, sapphire, silica, MgAl₂O₄, BaF₂, CaF₂, YAG, ZnS) has been installed in the OLTIS. The electrical and optical properties of these materials have been characterised prior to exposure and will be measured again after retrieval from JET. The expected total neutron fluence at the LTIS during the T/DT campaign is up to about 8×10^{15} n/cm² (of which $\approx 5 \times 10^{15}$ n/cm² with $E > 0.1$ MeV) and first wall DT neutron energy spectrum are relevant to ITER diagnostics and heating systems.

7.2.2. Tests of Fiber Optic Current Sensor for ITER

A similar experiment is devoted to Fibre Optic Current Sensor (FOCS), a non-inductive solution for plasma current measurements based on the Faraday effect in optical fibres: in a fibre loop around a current, for linearly polarised light the total polarisation rotation angle θ is directly proportional to the enclosed current I , $\theta = VI$, where V is the Verdet constant. Such a system is free of the inherent problems of the electromagnetic sensors whose performance in future burning plasma machines may degrade due the combined effect of steady-state operation and the presence of strong nuclear radiation. FOCS will be installed as a back-up option in ITER where it must comply with stringent requirements (vacuum compatibility, tolerance to strong radiation fields and high temperatures). Two FOCS systems are installed on JET [110] to assess their performance in presence of multi-MA range currents and high neutron flux, from $\sim 10^{10}$ n/cm²/s in D operations to $\sim 10^{12}$ n/cm²/s in DT on the external surface of the vacuum vessel, comparable with that expected in ITER [111].

During 2020 JET operation, measurements were carried out, comparing the two FOCS systems. The first operates in transmission mode and includes a 100m long fibre link (armoured military grade optical cable) between the sensing fibre and the data acquisition hardware. The second operates in reflection mode, with a Faraday mirror. Both use spun fibres with low linear birefringence for the sensing part wrapped around the vacuum vessel outer surface.

The measurement error is defined as the difference between FOCS and reference measurements from the continuous external Rogowski coil. It was shown that the FOCS systems can operate for a long period at the same error level without additional corrections. In transmission mode, at the maximal current the error is within 1%, as compared to the Rogowski coil. Working in reflection mode doubles the sensor sensitivity because the effective sensing fibre length is doubled. With a fixed resolution of the polarisation state detection, this corresponds to a reduction of the measurement error. The tests confirmed that the reciprocal birefringence effects are completely suppressed when no current circulates in the FOCS loop in reflection mode.

Expected effects of the ITER radiation environment on FOCS are transmission degradation and changes to the Verdet constant. The former was intensively addressed via fission reactor experiments, though the applicability of those studies can be questioned due to the absence of 14 MeV neutrons, this will be addressed by the DT campaign which will provide a representative 14MeV flux. Data accumulated during non-DT operation are also useful. The Verdet constant was monitored during JET operation in 2016-2019 (Fig. 23). Variations of the Verdet constant are due to a combination of FOCS and the reference Rogowski measurement errors. No systematic long-term trend is observed, indicating that radiation-induced changes are not significant within the radiation flux level produced so far.

8. Summary

The technical and scientific preparation for T and DT operations is complete. The scenario development in preparation for sustained high fusion power expanded ILW operational boundaries, leading to new physics of interest to ITER, e.g. pedestal impurity screening, small ELMs scenarios in seeded and unseeded plasmas, demonstration that N_e compares favourably to N_2 as seed gas. A wide range of experiments on the impact of isotope and mixed species plasmas was performed, confirming or challenging assumptions and reduced models used for predicting ITER, and ready to be tested in tritium. A wide-ranging set of JET SPI experiments provided ITER with important information for preparing its Disruption Mitigation System. JET unique environment provided key results from plasma facing components and nuclear technology experiments, testing materials and components for ITER, and providing the data

needed to validate assumptions and codes for the design & safe operation of ITER and DEMO.

Acknowledgements

This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014-2018 and 2019-2020 under grant agreement No 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

References

- [1] L.R. Baylor et al 2019 Nucl. Fusion 59 066008, L. R. Baylor et al., this conference
- [2] P. Batistoni et al, Fusion Engineering and Design Vol 109-11, 2016
- [3] M. Keilhacker et al. Nuclear Fusion, Vol. 39, No. 2 (1999); The JET team (presented by M. Watkins), Nuclear Fusion, Vol. 39, No. 9Y (1999)
- [4] R J Hawryluk et al, Proc 15th IAEA Conf on Plasma Physics & Controlled Nuclear Fusion Research (Seville, Spain, 1994), IAEA-CN-60/A1-1; Y Kamada et al Fusion Science & Technology 42 (2002) 185.
- [5] J. Figueiredo, et al., Review of Scientific Instruments 89, 10K119 (2018);
- [6] E. Joffrin et al., Nucl. Fusion 54 (2014) 013011; M. Beurskens et al., Nucl. Fusion, 54 (2014) 043001
- [7] D.Ciric et al., Fusion Eng. Des., 86, 509-512 (2011)
- [8] L. Garzotti et al., Nucl. Fusion 59 (2019) 076037;
- [9] J. Garcia et al., this conference;
- [10] R. Dux et al, PPCF 56(2014) 124003; R. Dux et al. Nuclear Materials and Energy 12 (2017) 28–35;
- [11] A. Field, submitted to PPCF
- [12] Y.-T. Kim et al., Nucl. Fusion 58 (2018) 036020
- [13] I. Nunes et al., Plasma Phys. Control. Fusion 58 (2016) 014034
- [14] J. Garcia et al., submitted; E. de la Luna et al., this conference
- [15] J. Garcia et al., Nucl. Fusion 59 (2019) 086047
- [16] S. Saarelma et al., Plasma Phys. Control. Fusion 60 (2018) 014042;
- [17] C. Ham et al., this conference
- [18] E. Lerche et al., AIP Conference Proceedings 2254, 030007 (2020) & ref therein
- [19] R. Bilato et al., 2014, AIP Conference Proceedings 1580, 291
- [20] M. Mantsinen et al., this conference
- [21] Ye.O. Kazakov et al., Phys. Plasmas 28, 020501 (2021)
- [22] M. Nocente et al., NF 60, 124006 (2020)
- [23] R.J. Goldston et al., 1981 J. Comput. Phys. 43 61; <https://transp.pppl.gov/index.html>
- [24] S. Mazzi et al., 62rd APS-DPP Conf. (09-13 Nov. 2020), invited talk
- [25] S. Vartanian et al., Fus. Eng. Design 170, 112511 (2021)
- [26] M. Mantsinen et al, Proc. 46th EPS Conf. Plasma Phys., O5.102 (2019), K. Kirov et al., AIP Conf. Proc. 2254, 030011 (2020)
- [27] R. Dumont, Nucl. Fusion 58 8 (2018) 082005
- [28] R. Nazikian, Phys. Rev. Lett. 78 15 (1997) 2976
- [29] R. A. Tinguely et al., PPCF 62 11 (2020) 115002
- [30] V. Aslanyan et al., NF 59 2 (2019) 026008; N. Fil et al., in preparation
- [31] A. Tinguely et al., NF 61 2 (2021) 026003
- [32] C. Giroud et al., this conference
- [33] C. Giroud et al., EX/P5-25 IAEA 2014
- [34] E. Kaveeva et al., PSI 2021; V. Rozhansky et al., this conference
- [35] V.P. Bhatnagar, Nucl. Fusion, Vol. 39, No. 3 (1999); JET team (prep by J. G. Cordey), Nucl. Fusion, Vol. 39, No. 11Y
- [36] C. F. Maggi et al., this conference
- [37] C. F. Maggi et al., Plasma Phys Control Fusion 60 (2018) 014045
- [38] D.R. Hatch et al 2021 Nucl. Fusion 61 036015; D.R. Hatch et al., this conference
- [39] J. Garcia et al., Nucl. Fusion 59 (2019) 086047
- [40] N. Bonanomi et al., 2019 Nucl. Fusion 59 096030
- [41] G.M. Staebler et al., 2007 Phys. Plasmas 14 (2007) 055909
- [42] M. Kotschenreuther et al., Comp. Phys. Comm. 88, 128 (1995)
- [43] F. I. Parra and M. Barnes. PPCF 045002 (2014)
- [44] F. Nave et al., in preparation
- [45] T. Tala et al., this conference
- [46] D.B. King et al 2020 Nucl. Fusion 60 096030
- [47] M. Valovic et al., this conference;
- [48] M. Marin et al., this conference
- [49] E. Solano et al., this conference
- [50] P. Stangeby et al., PPCF 60 2018
- [51] B. Lomaneski et al., 62rd APS-DPP Conf. (Nov. 2020), invited talk, paper in preparation
- [52] L. Frassinetti et al., Nucl. Fusion 57, 2017
- [53] S. Brezinsek et al., Nucl. Fusion 54 (2014) 103001;
- [54] J. Romazanov et al. Accepted for publication in NME (2021)
- [55] E. Safi et al., J. Phys. D: Appl. Phys. 50 (2017) 204003;
- [56] J. Romazanov et al., Phys. Scripta 2017 (T170), 014018
- [57] J. Romazanov et al., this conference
- [58] S. Brezinsek et al. Nucl. Fusion 59 (2019) 096035
- [59] A. Kirschner et al., Nuclear Materials and Energy 18:239-244
- [60] A. Huber et al, Nucl. Materials and Energy 25 (2020) 100859;
- [61] N. Den Harder et al, Nucl. Fusion 56 (2016) 026014
- [62] H.A. Kumpulainen, et al., Nuclear Materials and Energy 25 (2020) 100866
- [63] C. D. Challis et al., Nucl. Fusion 60 (2020) 086008
- [64] S. Jachmich et al., this conference;
- [65] U. Sheikh et al., this conference
- [66] C. Reux et al, accepted for publication in Physical Review Letters
- [67] R. Sweeney et al., 62rd APS-DPP Conf. (09-13 Nov. 2020), invited talk
- [68] D. G. Whyte et al., internal report A22639, General Atomics,1997
- [69] GTA Huysmans et al., NF 47, 659 (2007); M. Hoelzl et al., submitted to Nucl. Fusion

- [70] S. C. Jardin et al., 2012 Comput. Sci. Discovery 5 014002
- [71] D. Bonfiglio et al., in preparation;
- [72] D. Hu et al., Nucl. Fusion 61 (2021) 026015
- [73] G. Pucella et al., 2021 Nucl. Fusion 61 046020
- [74] D. R. Ferreira et al., Fusion Engineering and Design 164 (2021) 112179
- [75] S. Menmuir et al., Review of Scientific Instruments 85, 11E412 (2014); A. Thorman et al., in preparation
- [76] N C Hawkes et al, Review of Scientific Instruments 89, 10D113 (2018);
- [77] B. Lomaneski et al., APS Division of Plasma Physics Meeting 2019
- [78] P. Batistoni et al., Nucl. Fusion 58 (2018) 026012; P. Batistoni et al., Nucl. Fusion 58 (2018) 106016
- [79] [79] S. Conroy et al., Nucl. Fusion 28 (1988) 2127; S. Popovichev et al., 31st EPS Conf. Plasma Phys. ECA Vol. 28G, P5.173 (2004)
- [80] E. Belonohy et al., Fusion Eng. Des. 123 (2017) 196-200
- [81] C. Hellesen et al., Nucl. Fusion 55 (2015) 023005 & references therein
- [82] J. A. Heikkinen et al. 2001 J. Comput. Phys. 173 527-48; E. Hirvijoki et al. 2014 Comput. Phys. Commun. 185
- [83] P. Sirén et al. 2019 JINST 14 C11013; H. Weisen et al, 2020 Nucl. Fusion 60 036004;
- [84] P. Sirén et al., this conference
- ~~[85] A. Widdowson et al., Phys. Scr. T171 (2020) 014051.~~
- ~~[86] J.P. Coad et al., Fusion Eng. Design 138 (2018) 78.~~
- ~~[87] S. Krat et al., Phys. Scr. T171 (2020) 014059.~~
- ~~[88] K. Heinola et al., Phys. Scr. T170 (2017) 014063.~~
- ~~[89] S. Brezinsek et al., Nucl. Fusion 54 (2014) 103001.~~
- ~~[90] Sunwoo Moon et al., Nucl. Mater. Energy 19(2019) 59.~~
- ~~[91] I. Jepu et al., Nucl. Fusion 59 (2019) 086009.~~
- ~~[92] M. Rubel et al., Fusion Eng. Design 136 (2018) 579.;~~
- ~~[93] M. Rubel et al., Phys. Scr. T171 (2020) 014048.~~
- ~~[94] S. Ratynskaia et al 2020 Nucl. Fusion 60 104001~~
- ~~[95] Gervasini G, Lazzaro E and Uccello A 2017 J. Fusion Energy 36 25–39; Uccello A et al 2016 Phys. Plasmas 23 102506~~
- ~~[96] A. Uccello et al, Plasma Phys. Control. Fusion 62 (2020) 064001~~
- [97] P. Batistoni et al., Rad. Prot. Dosimetry 180 (2017) 1; R. Villari et al., Fusion Engin. Design 123 (2017) 171
- [98] B. C. Colling et al., Fusion Engin. Design 136 (2018) 258
- [99] W. Leysen et al., Fusion Engin. Design 160 (2020) 111754;
- [100] L.W. Packer et al., Nucl. Fusion, Vol 58 (2018) 096013.
- [101] D. Campling et al., Fusion Engin. Design 146 (2019) 69; S. Reynolds et al., Fusion Engin. Design 109-111 (2016)
- [102] J. D. Naish et al., submitted to Fusion Eng. Design
- [103] B. Obryk et al., Nucl. Instrum. Meth. A 904 (2018) 202
- [104] MCNP - Version 5, Vol. I: Overview and Theory", LA-UR-03-1987(2003); T. Goorley, et al., "Initial MCNP6 Release Overview" Nuclear Technology, 180, pp 298-315 (Dec 2012)
- [105] S.W. Mosher et al., (2015), ORNL/TM-2013/416 Rev. 1, Oak Ridge National Laboratory
- [106] N. Fomesu et al., Fusion Engin. Design 161 (2020)
- [107] N. Fomesu et al, submitted to Fusion Engin. Design
- [108] R. Villari et al., Fusion Engin. Design 136 (2018) 1545
- [109] W. Leysen et al., Fusion Engin. Design 160 (2020) 111754
- [110] A. Gusarov et al., Fusion Engin. Design 165 (2021) 112228
- [111] G. Vayakis, et al., J. Nucl. Mater. 417 (2011) 780
- [112] C. Sozzi et al., this conference
- [113] C. F. Maggi et al., 2018 Plasma Phys Control Fusion 60 014045]
- [114] H. Weisen et al., 2020 J. Plasma Phys. 86 905860501
- [115] ILW reference (probably Matthews et al)
- [116] A. Field in preparation
- [117] R. Dumont this conference
- [118] D McDonald et al, Plasma Phys. Control. Fusion 46 519 (2004)
- [119] J. Juul Rasmussen, AH, Nielsen, J. Madsen, V. Naulin, GS Xu 2016, Plasma Physics and Controlled Fusion, vol. 58, pp. 014031
- [120] AH., Nielsen, GS. Xu, J. Madsen, V. Naulin, J. Juul Rasmussen, BN Wan 2015, Physics Letters A, vol. 379, no. 47-48, pp. 3097-3101
- [121] C. Silva, to be submitted to NF
- [122] R. Lässer, A.C. Bell, N. Bainbridge, D. Brennan et al., Fusion Eng. Des. 46 (1999) 307-312.
- [123] R. Lässer, A.C. Bell, N. Bainbridge, P.D. Brennan et al., Fusion Eng. Des. 47 (1999) 173-203.
- [124] L. Horton et al, Fusion Engineering and Design 109–111 (2016) 925
- [125] [1] A. Widdowson et al., Nucl. Fusion 57 (2017) 086045.
- [126] [2] A. Widdowson et al., Phys. Scr. T171 (2020) 014051.
- [127] [3] J.P. Coad et al., Fusion Eng. Design 138 (2018) 78.
- [128] [4] M. Rubel et al., J. Nucl. Mater. 313-316 (2003) 321.
- [129] [5] J. Likonen et al., Phys. Scr. T159 (2014) 014016.
- [130] [6] A. Widdowson et al., Phys. Scr. T159 (2014) 014010.
- [131] [7] P. Petersson et al., J. Nucl. Mater. 463 (2015) S814.
- [132] [8] M. Mayer et al., Phys. Scr. T167 (2016) 014051.
- [133] [9] M. Mayer et al., Phys. Scr. T170 (2017) 014058.
- [134] [10] S. Krat et al., Phys. Scr. T171 (2020) 014059.
- [135] [11] K. Heinola et al., Nucl. Mater. Energy 463 (2015) 961.
- [136] [12] K. Heinola et al., Phys. Scr. T167 (2016) 014075.
- [137] [13] K. Heinola et al., Phys. Scr. T170 (2017) 014063.
- [138] [14] K. Heinola et al., Nucl. Mater. Energy 19 (2019) 397.
- [139] [15] S. Brezinsek et al., Nucl. Fusion 54 (2014) 103001.
- [140] [16] D. Ivanova et al., Phys. Scr. T159 (2014) 014011.
- [141] [17] M. Rubel et al., Phys. Scr. T170 (2017) 014061.
- [142] [18] Sunwoo Moon et al., Nucl. Mater. Energy 19(2019) 59.
- [143] [19] P. Ström et al., J. Nucl. Mater. 516 (2019) 202.
- [144] [20] J. Beal et al., J. Nucl. Mater. 463 (2014) S818.
- [145] [21] J. Beal et al., Phys. Scr. T167 (2016) 014052.
- [146] [22] N. Catarino et al., Phys. Scr. T170 (2017) 014059.
- [147] [23] A. Widdowson et al., Nucl. Mater. Energy 12 (2017) 499.
- [148] [24] I. Jepu et al., Nucl. Fusion 59 (2019) 086009.
- [149] [25] E. Fortuna et al., Phys. Scr. T170 (2017) 014038.
- [150] [26] M. Rubel et al., Fusion Eng. Design 136 (2018) 579.
- [151] [27] M. Rubel et al., Phys. Scr. T171 (2020) 014048.
- [152] [28] G. Pintsuk et al., Phys. Scr. T171 (2020) 014042.
- [153] [29] M. Tokitani et al., Phys. Scr. T171 (2020) 014010.


- [154] [30] M. Rubel *et al.*, *Nucl. Fusion* **61** (2021) 046022.
[155] [31] M. Rubel, *et al.*, *Rev. Sci. Instrum.* **77** (2006)
063501.
[156] T. Wauters *et al.*, in preparation
[157] P. Batistoni *et al.* *Nucl. Fusion* **58** (2018) 026012
[158] L. Packer *et al.*, this conference
[159] Surname A, Surname B and Surname C 2015 *Journal*
Name **37** 074203
[160] Surname A and Surname B 2009 *Journal Name* **23** 544


DT rehearsal	7/9/20 – 11/4/20	14/9/20 – 18/09/20	21/9/20 – 23/9/20
DT Safety Case	Ready		
J1T Depression/Depletion test	Combined 5-day		Combined 3-day test
J1 access	3 days	3 days	3 days
Daily full regeneration of all cryos		With CF	With CF
Reference Pulses/44bar.l limit	3 days	3 days	3 days
Experiment preparation	Yes		
Experiment planning	Yes		
Intershot data analysis	Yes		
Control room procedures	Yes		
Diagnostic rehearsal	3 days	3 days	3 days
Site-wide emergency exercise	Various, up to 1 shift		
Maintenance	3 days	3 days	3days


Table 1. Planned high-level rehearsal actions. Due to a coil coolant leak, the final week of the rehearsal was cancelled but the main DT rehearsal goals were achieved.

Table 2. List of identified elements and their potential origin.

Composition	Comment and quantity (%)	Potential origin
Al metal	Operation of boom creates Al particles: 70-75%	Material of RH boom structure
B and N together	Suggests boron nitride, BN: 4-5%	Lubricants of joints of RH boom
Carbon particles & debris	Carbon fibre composites and co-deposits: 20%	Debris of carbon fibre composites and legacy from JET-C operations
C fabrics	Evidence of cross contamination of sampling	Personal protective clothing
C, Ca, O together	May suggest CaCO ₃	Unknown source
Si pieces	5-30 µm	Unknown sources
Al-Si-Mg – also a little Ca and F in mixtures	Probably ceramics: < 0.1%	Ceramics used in vessel – breakages/cracking
Fe	Small bits	Machining/in- or out-vessel work
Cu	Small bits: < 0.1%	Neutral beam injectors
Fe + Cr	Probably steel	Machining/in-vessel work
Ni	Probably Inconel alloy, extensively used: < 1%	Machining/in-vessel work
Be + C	Only one flake showing stratified structure: <<0.1%	Peeled-off co-deposit
W	Very few tiny flakes: <0.1%	W coatings, particles found mostly in divertor, but also a few in main chamber.

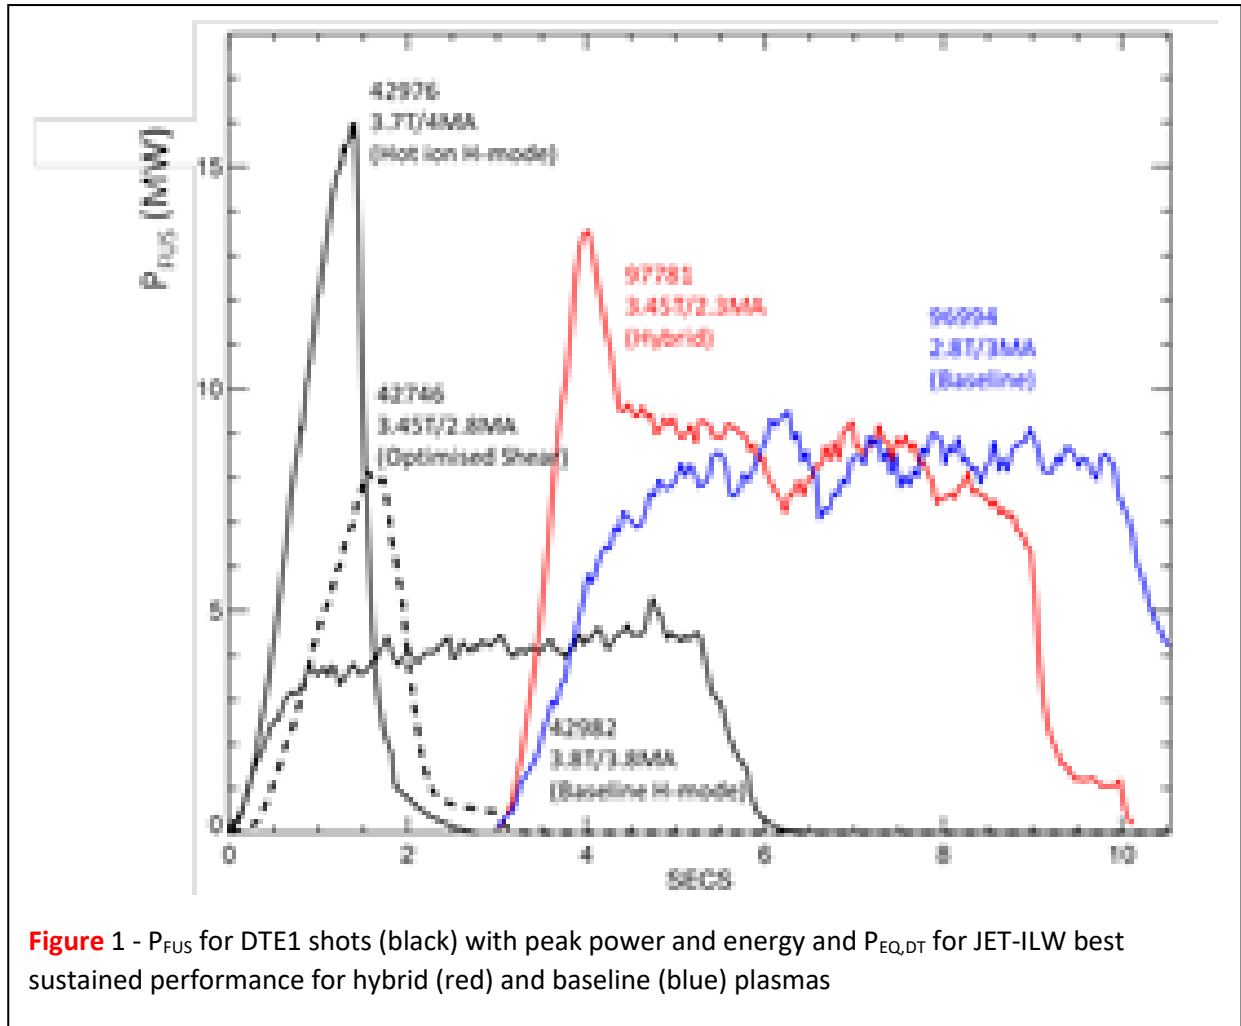

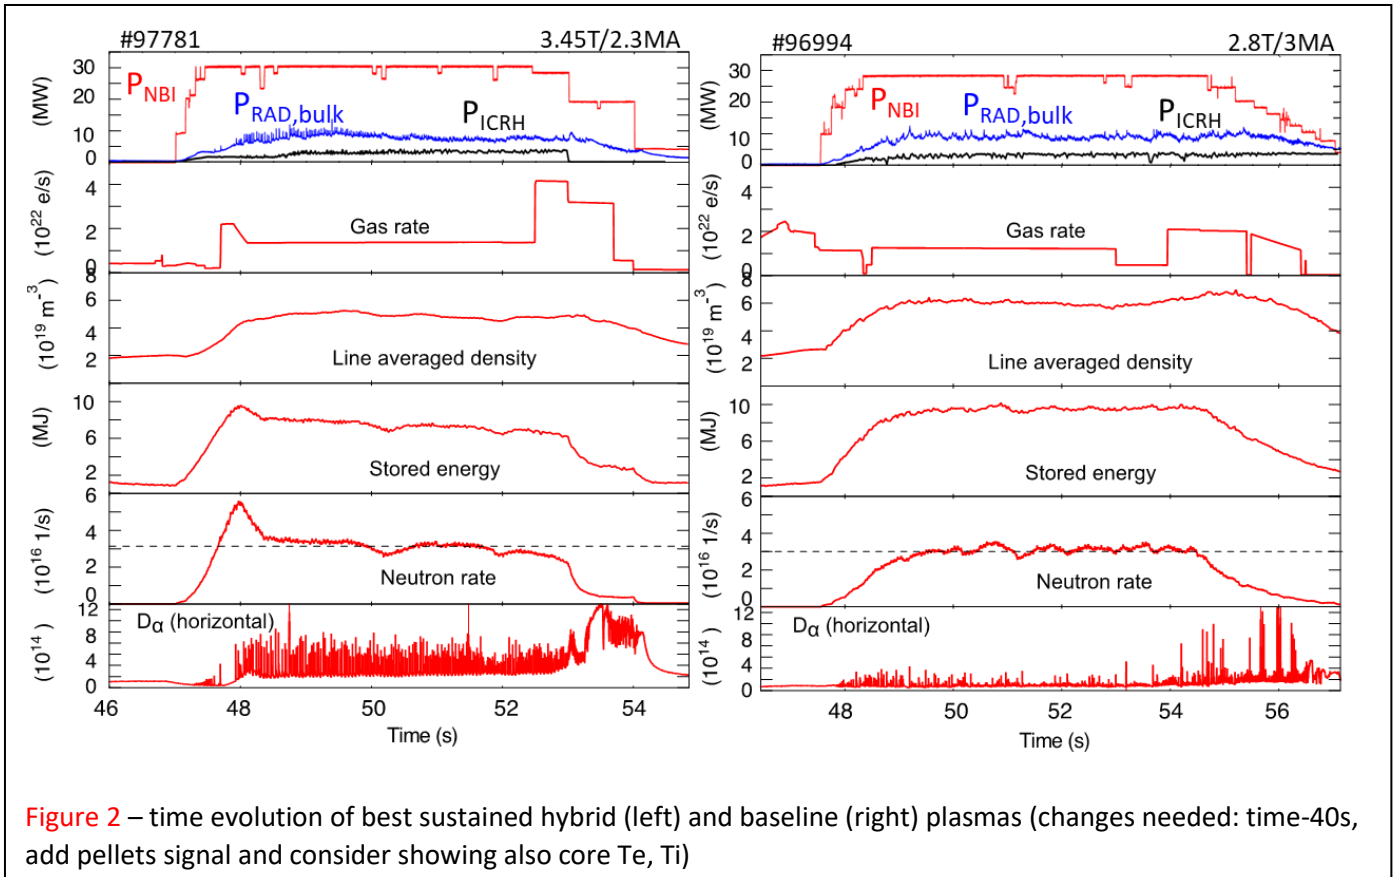

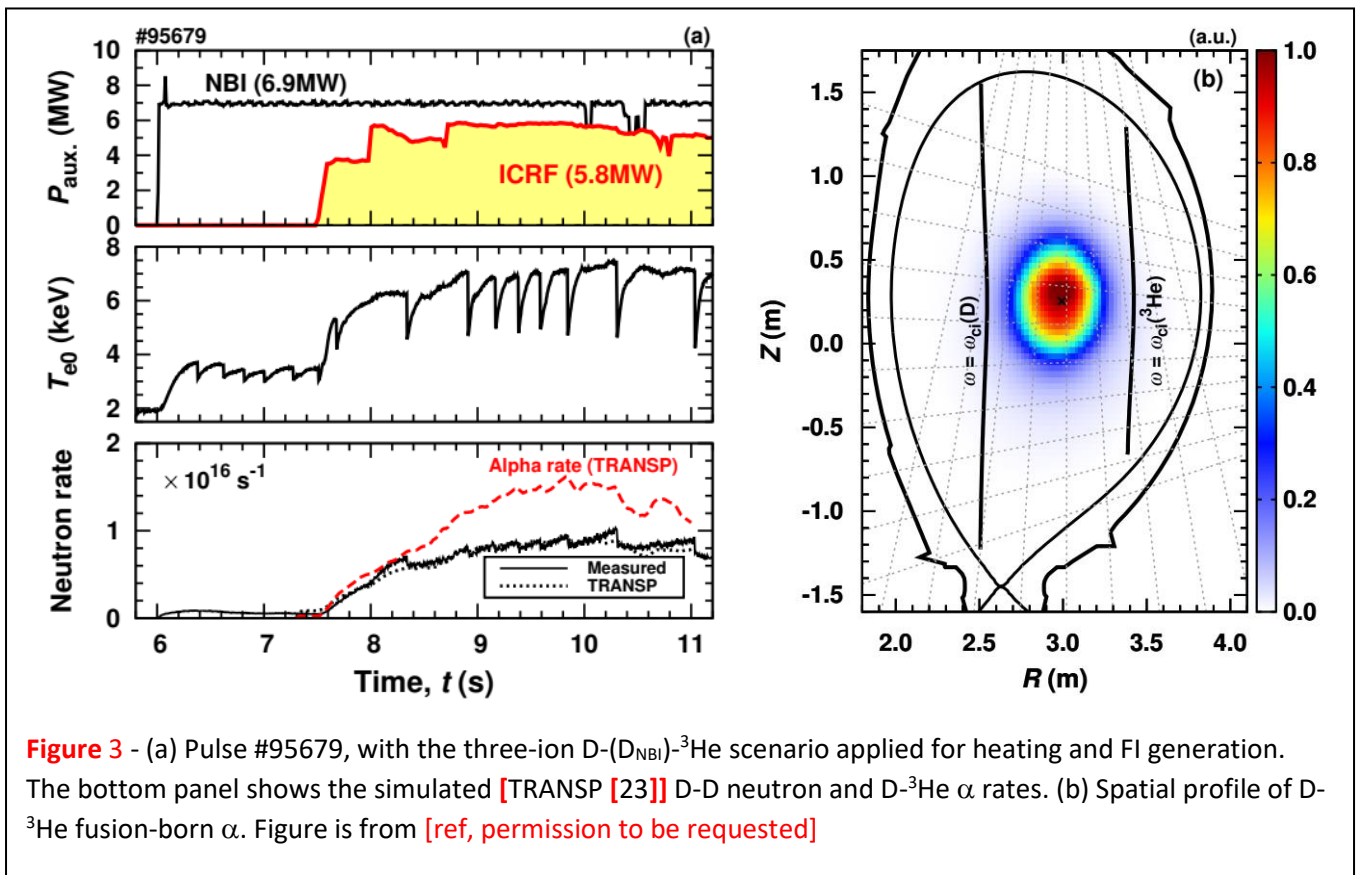

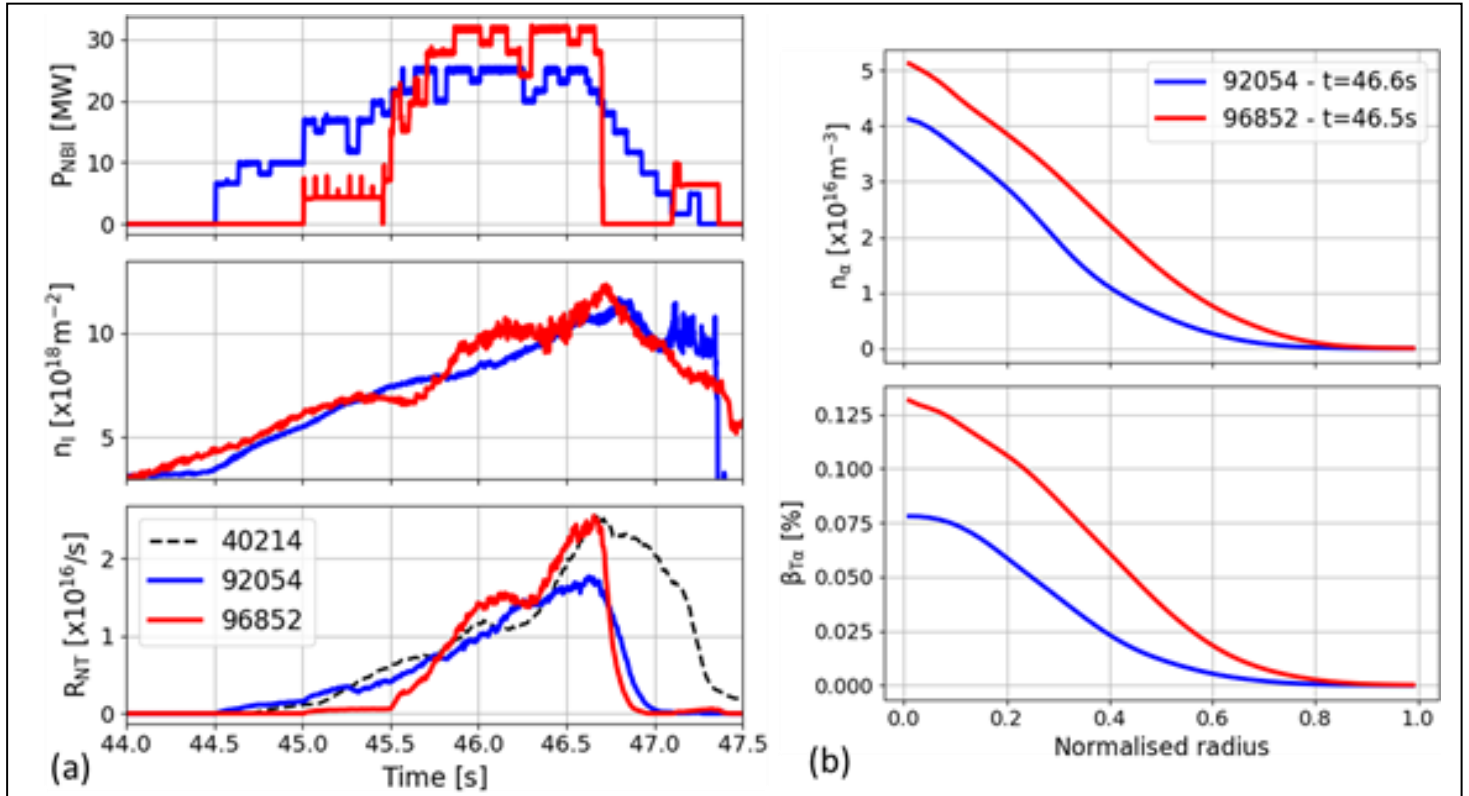


Figure 4 - Comparison of JET pulses 92054, 96852. (a) Time traces: NBI power, core line-integrated density (interferometry), DD neutron rate; Also shown is the neutron rate for reference JET carbon wall pulse 40214, shifted by -0.31s. (b) TRANSP extrapolation to DT of pulses 92054 and 96852: (top) alpha density; (bottom) normalised alpha beta. Figure is from [ref, permission to be requested]

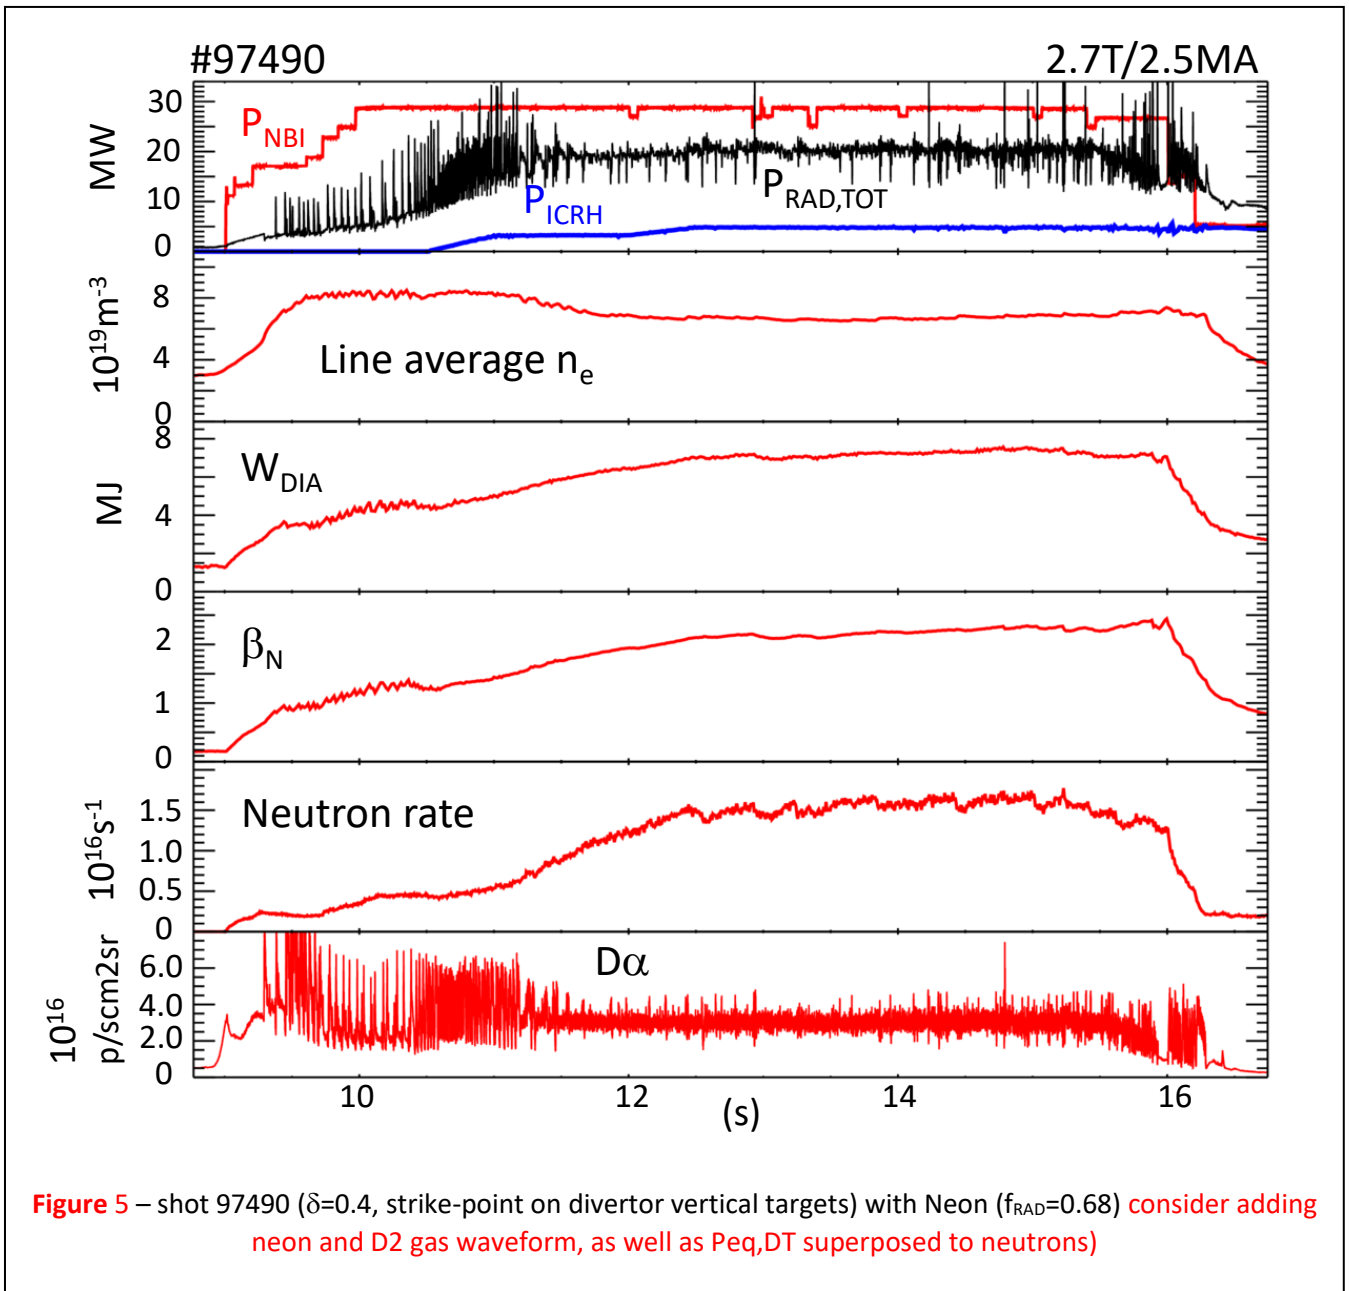




Figure 6 - D₂ SPI injection (from top right) in JET captured by high speed visible light. Figure is from [ref, permission to be requested]

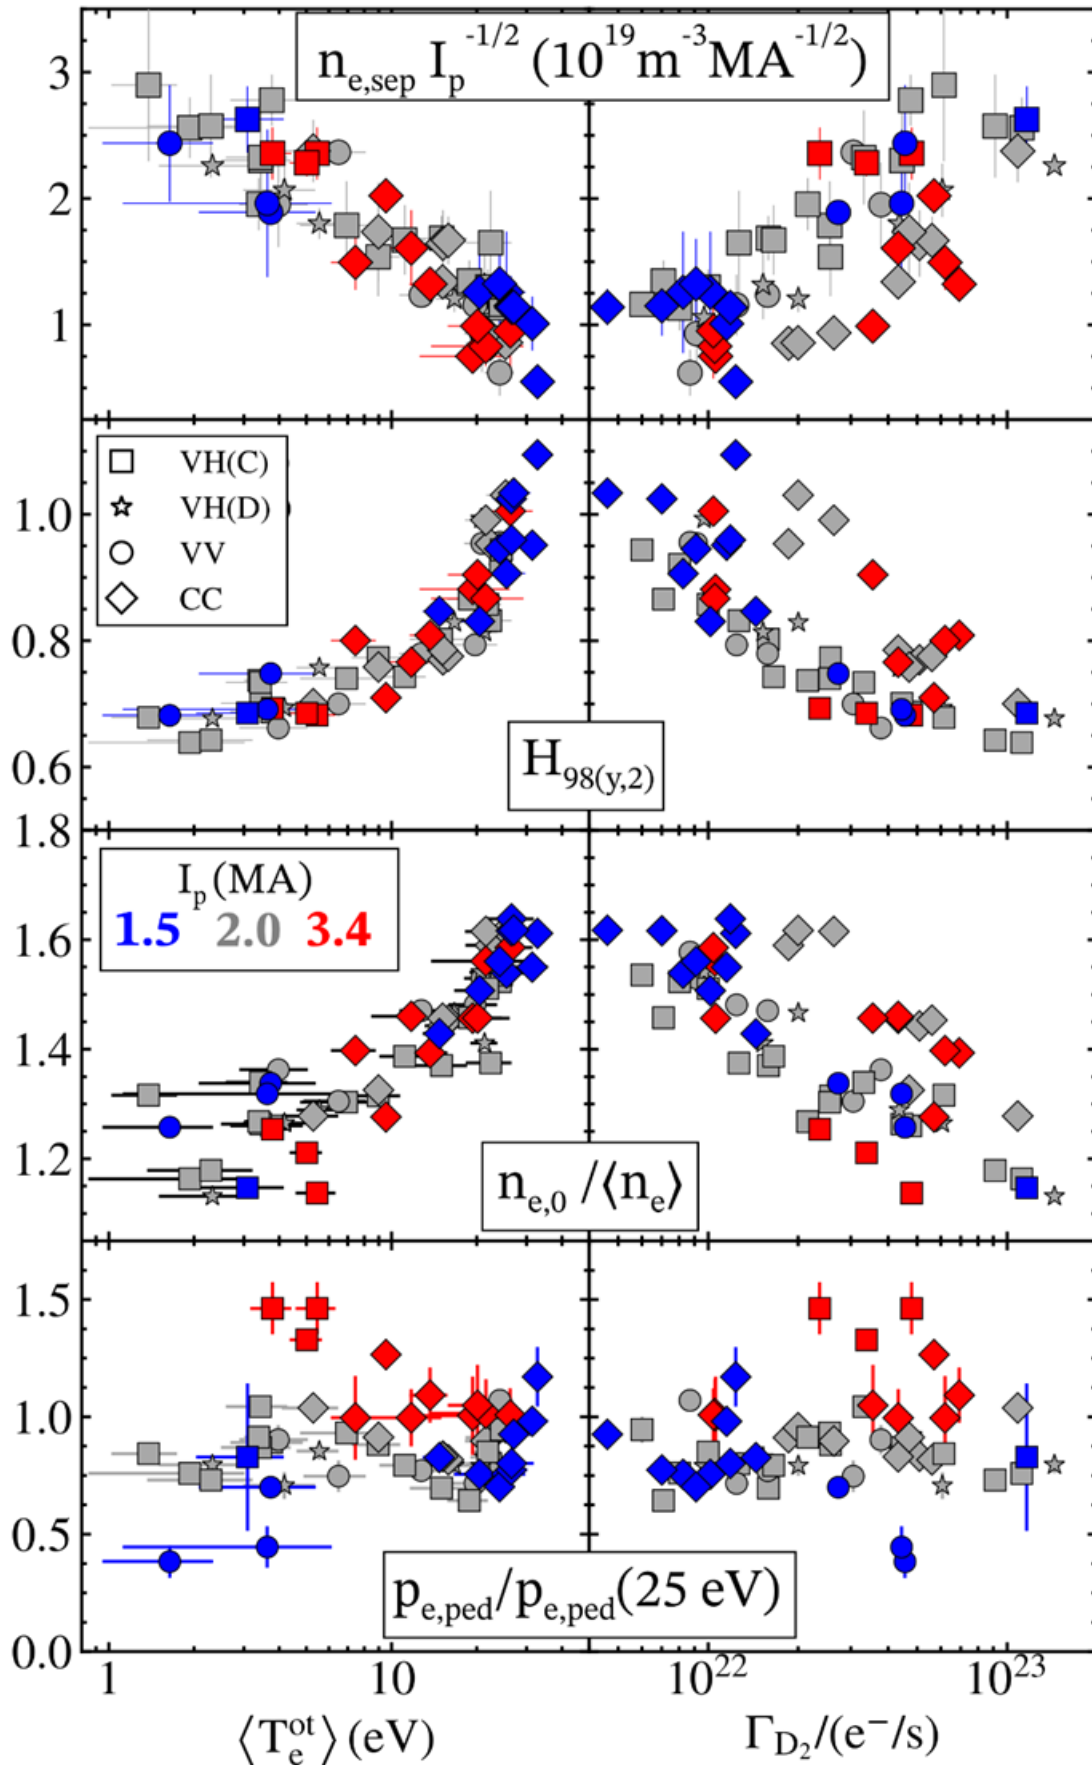
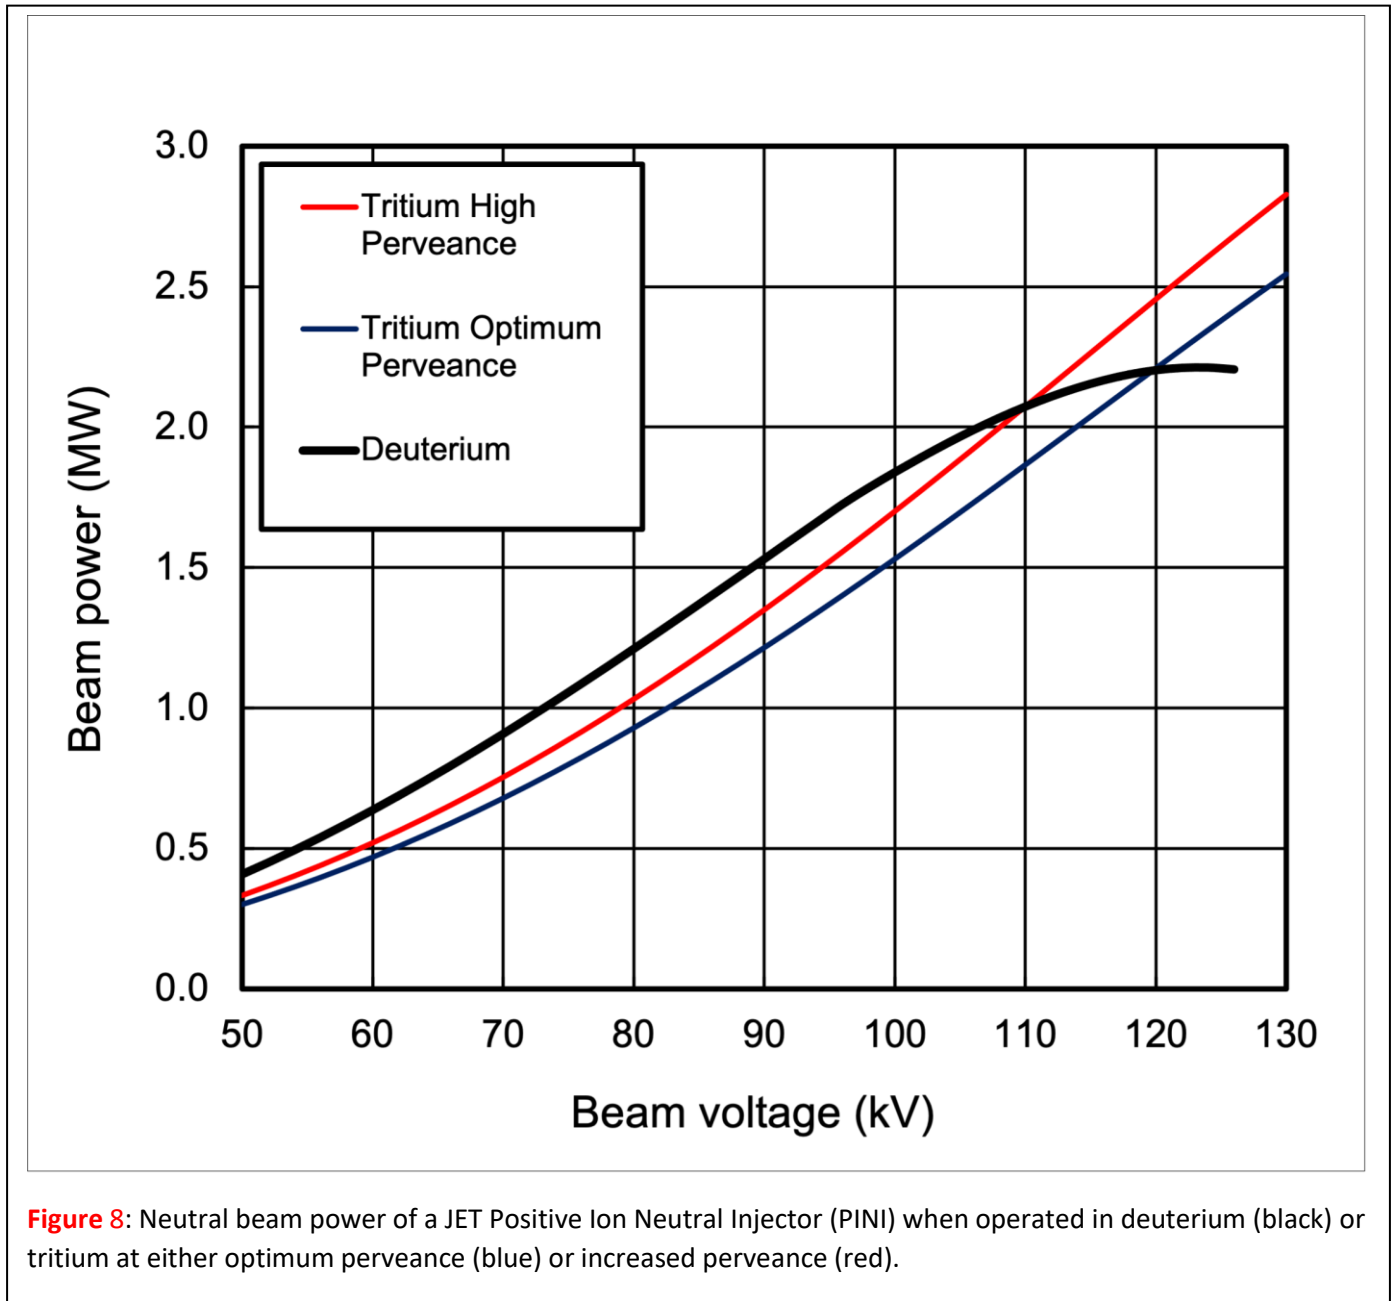


Figure 7 - Dataset of unseeded discharges showing the range of variation in the D2 fueling rate Γ_{D2} and the averaged outer target electron temperature $\langle T_{e,ot} \rangle$ and correlations with $n_{e,sep} I_p^{-0.5}$, $H_{98(y,2)}$, density peaking factor $n_{e,0} / \langle n_e \rangle$ and $p_{e,ped}$ normalized by $p_{e,ped}$ at $\langle T_{e,ot} \rangle = 25$ eV. Marker colour denotes I_p with 1.5 MA (blue), 2.0 MA (grey) and 3.4 MA (red). The database includes divertor configurations with the strike point locations on the inner-vertical, outer-horizontal targets, VH(C) and VH(D) with C and D denoting the position of the outer strike point on stack C and D of tile 5; inner and outer vertical (VV) and inner and outer corner (CC). Figure is from [ref] permission to be requested



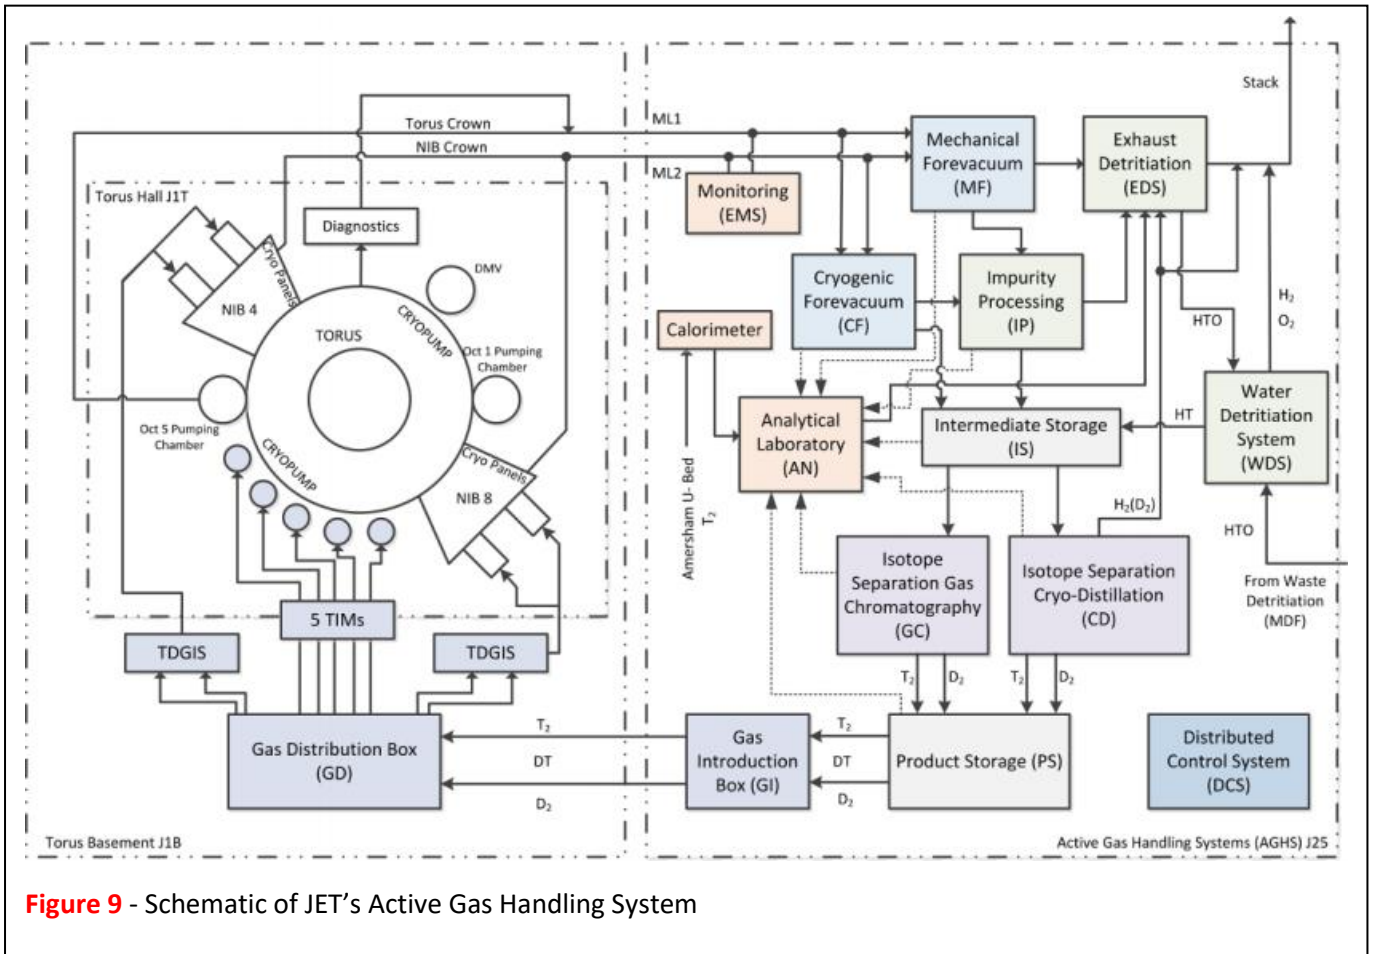
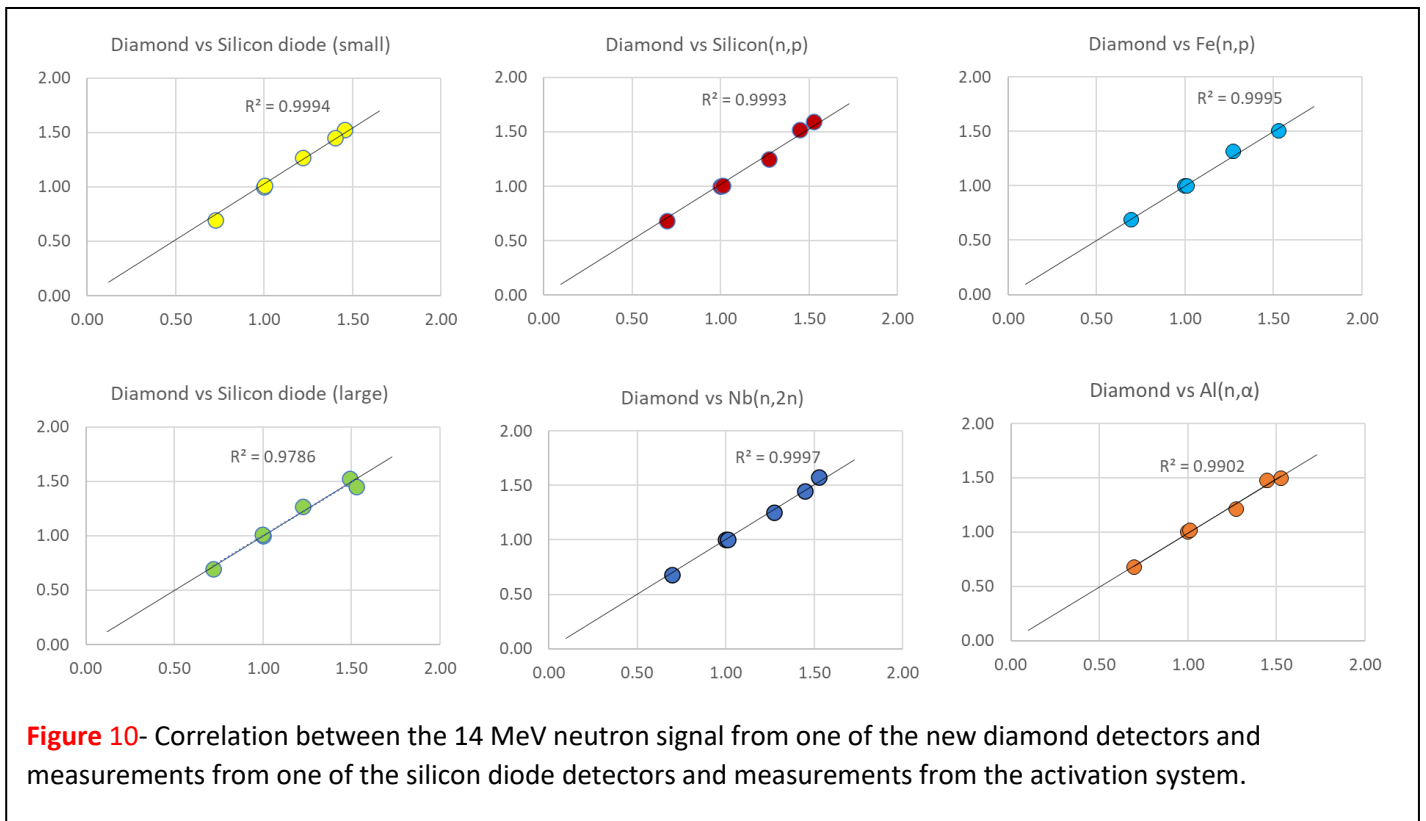


Figure 9 - Schematic of JET's Active Gas Handling System



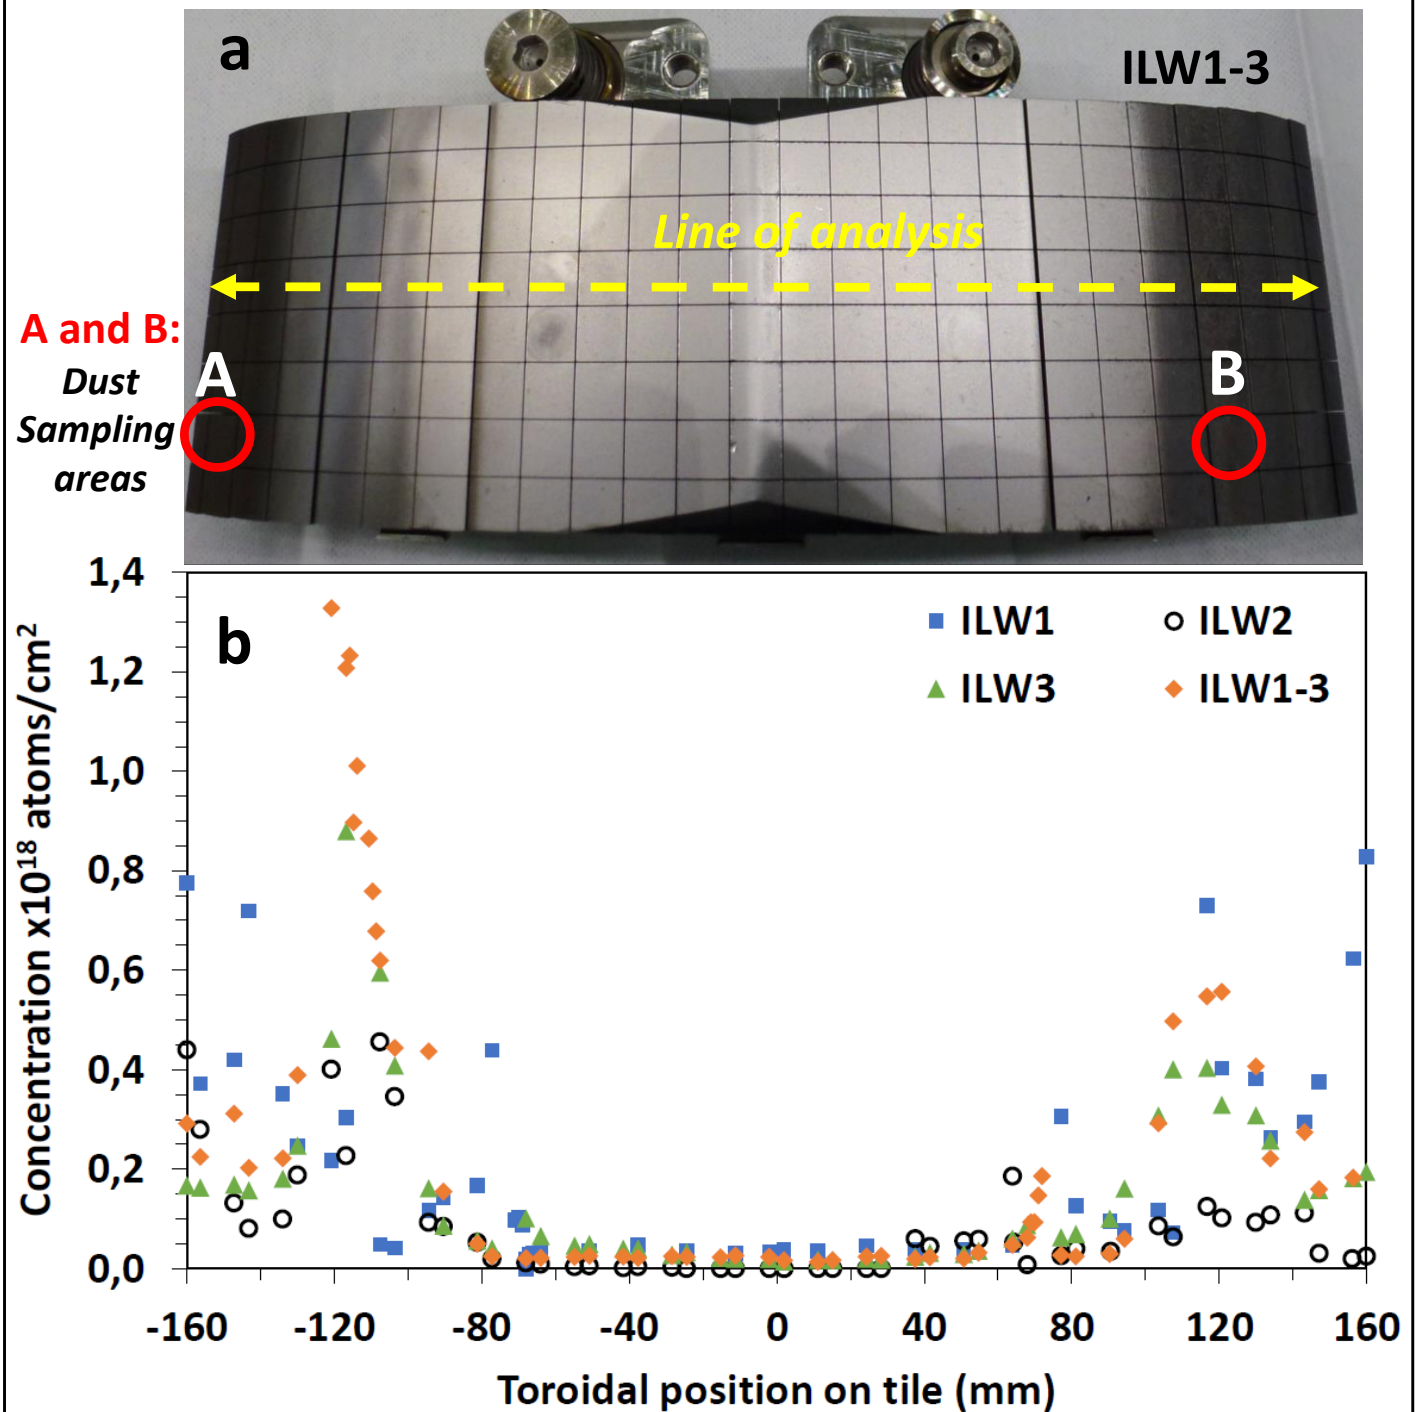
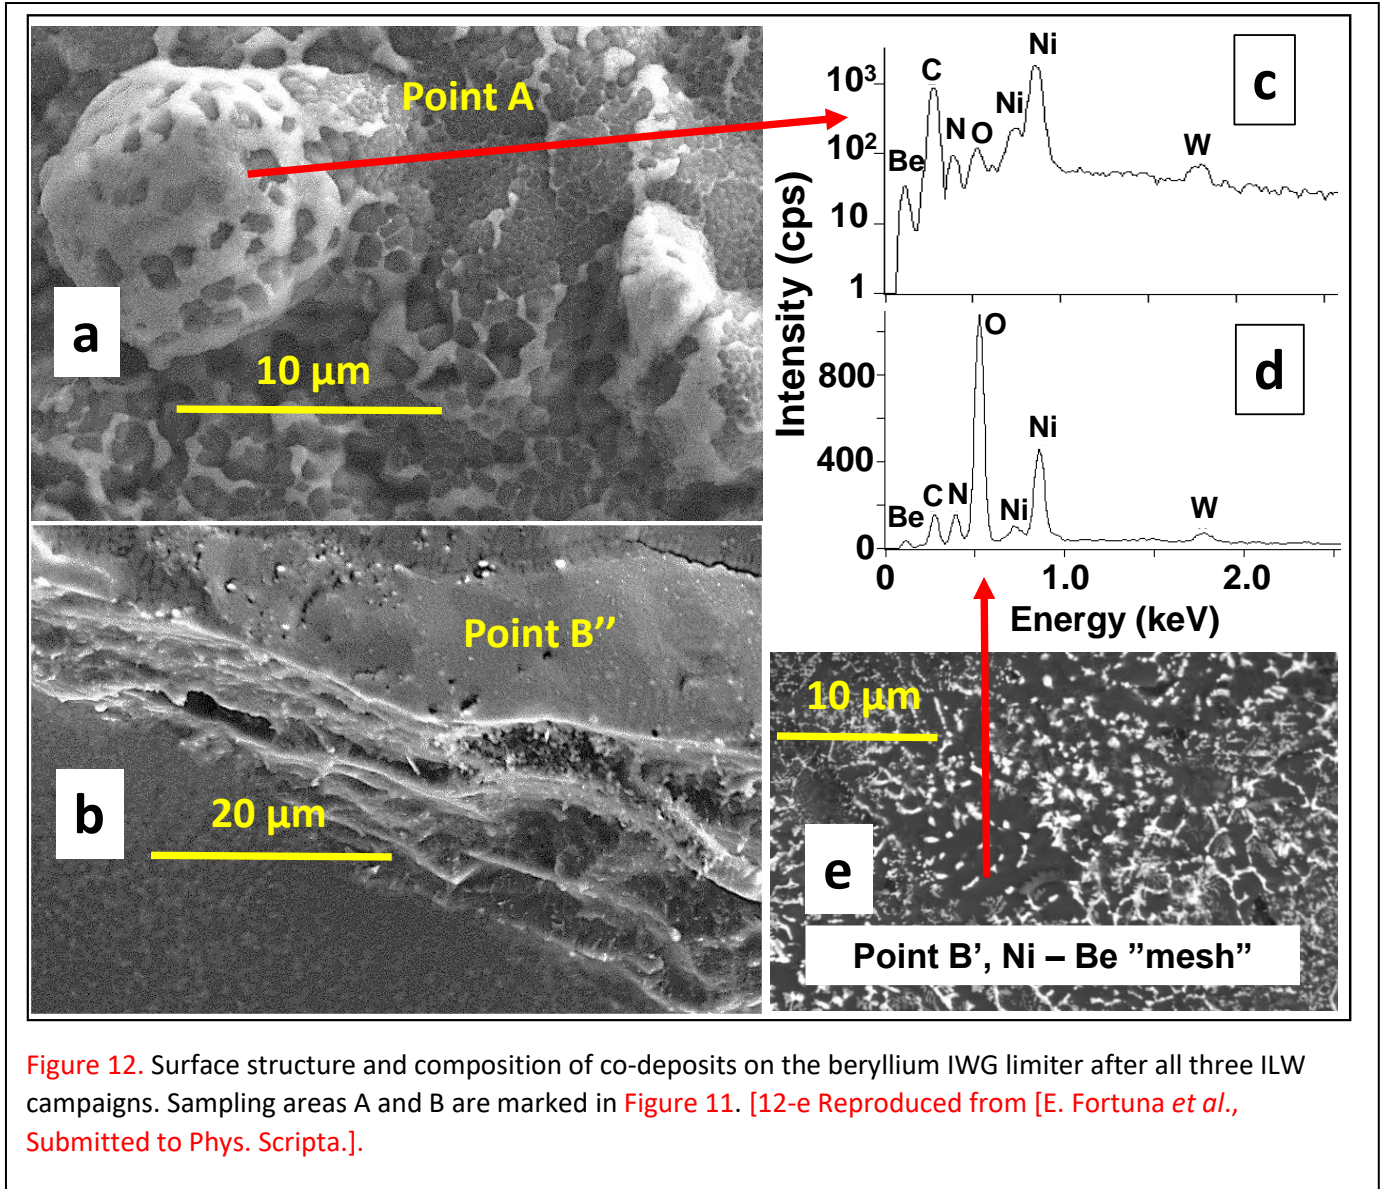


Figure 11. (a) Castellated beryllium mid-plane IWGL tile after exposure during all three ILW campaigns, areas of the co-deposit and dust sampling are marked; (b) Deuterium areal concentrations at mid-plane measured after consecutive campaigns and after all three campaigns ILW1-3; data for ILW-1 and ILW2, reproduced with permission of copyright holder UKAEA and author [PWI-1, PWI-2].



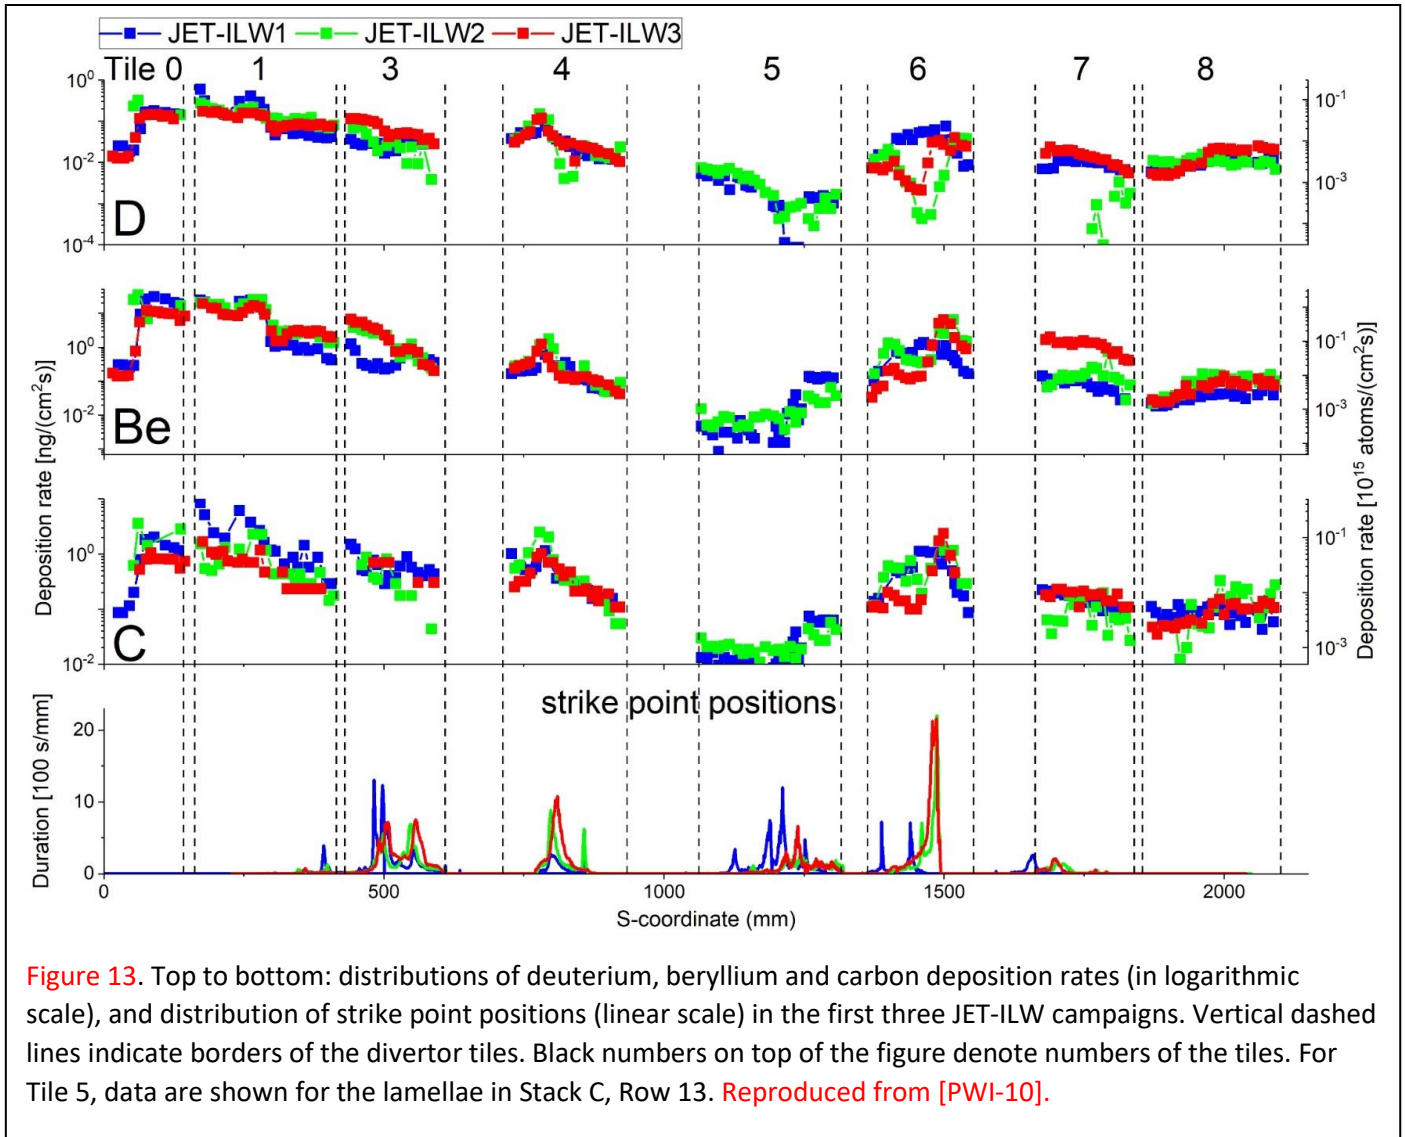
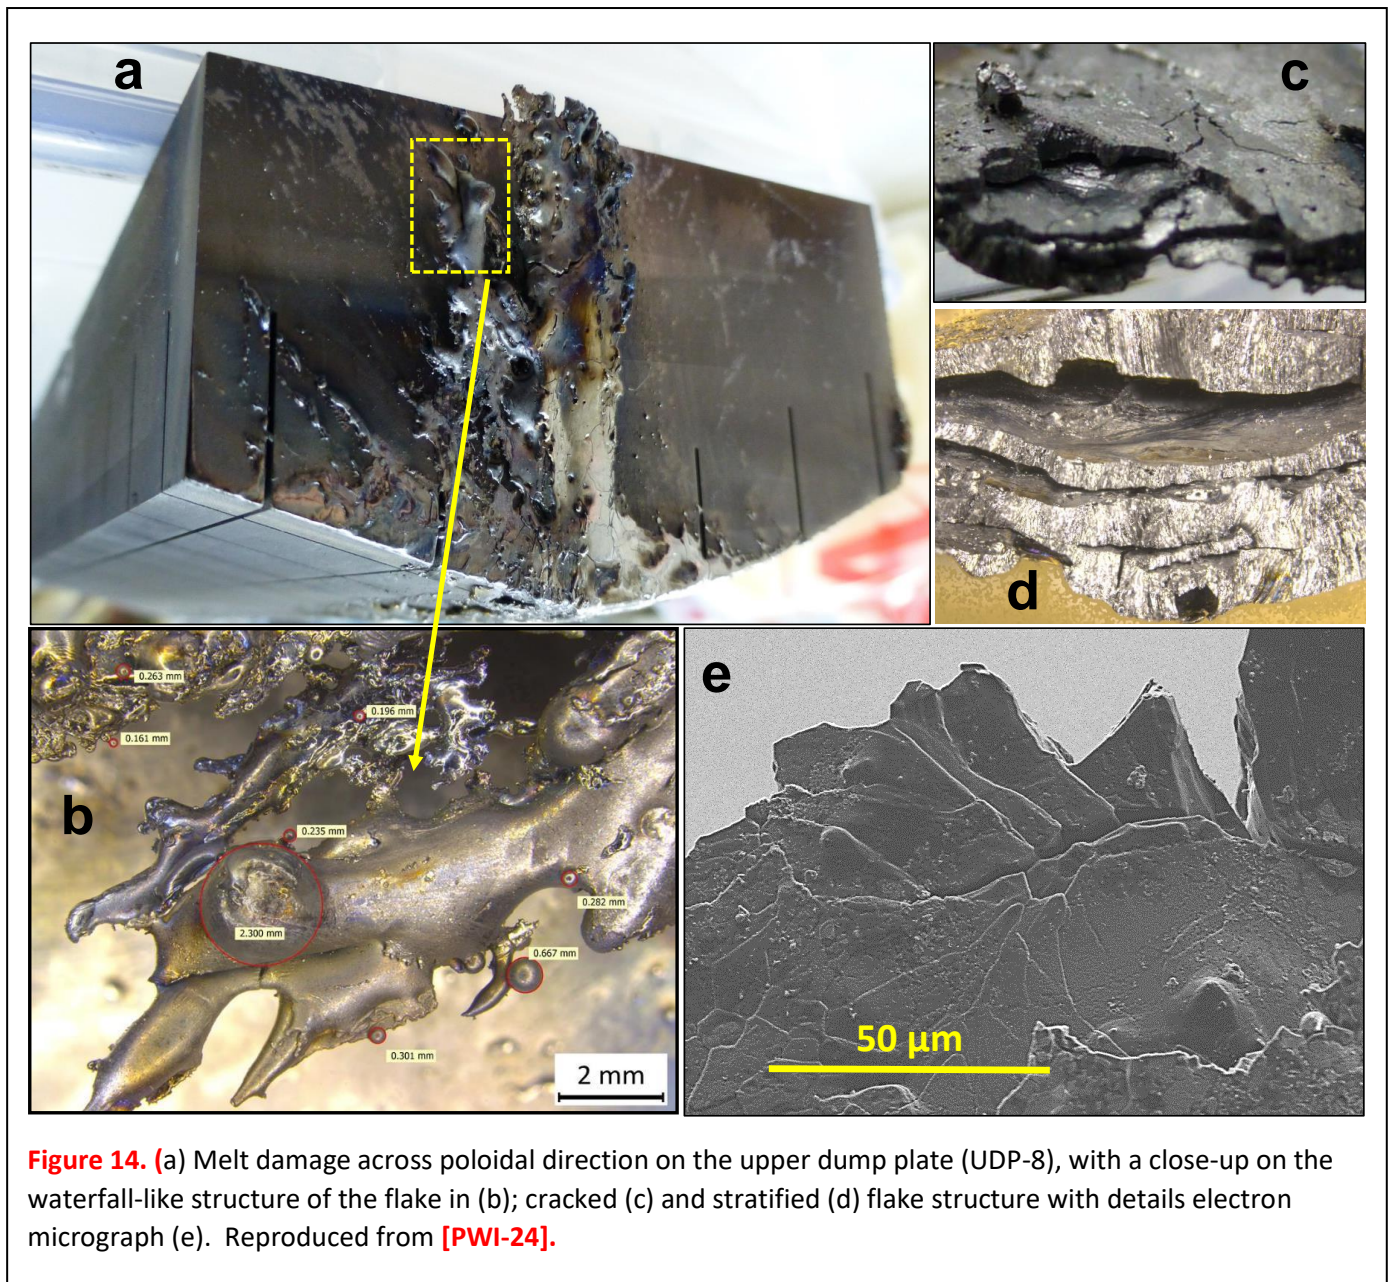
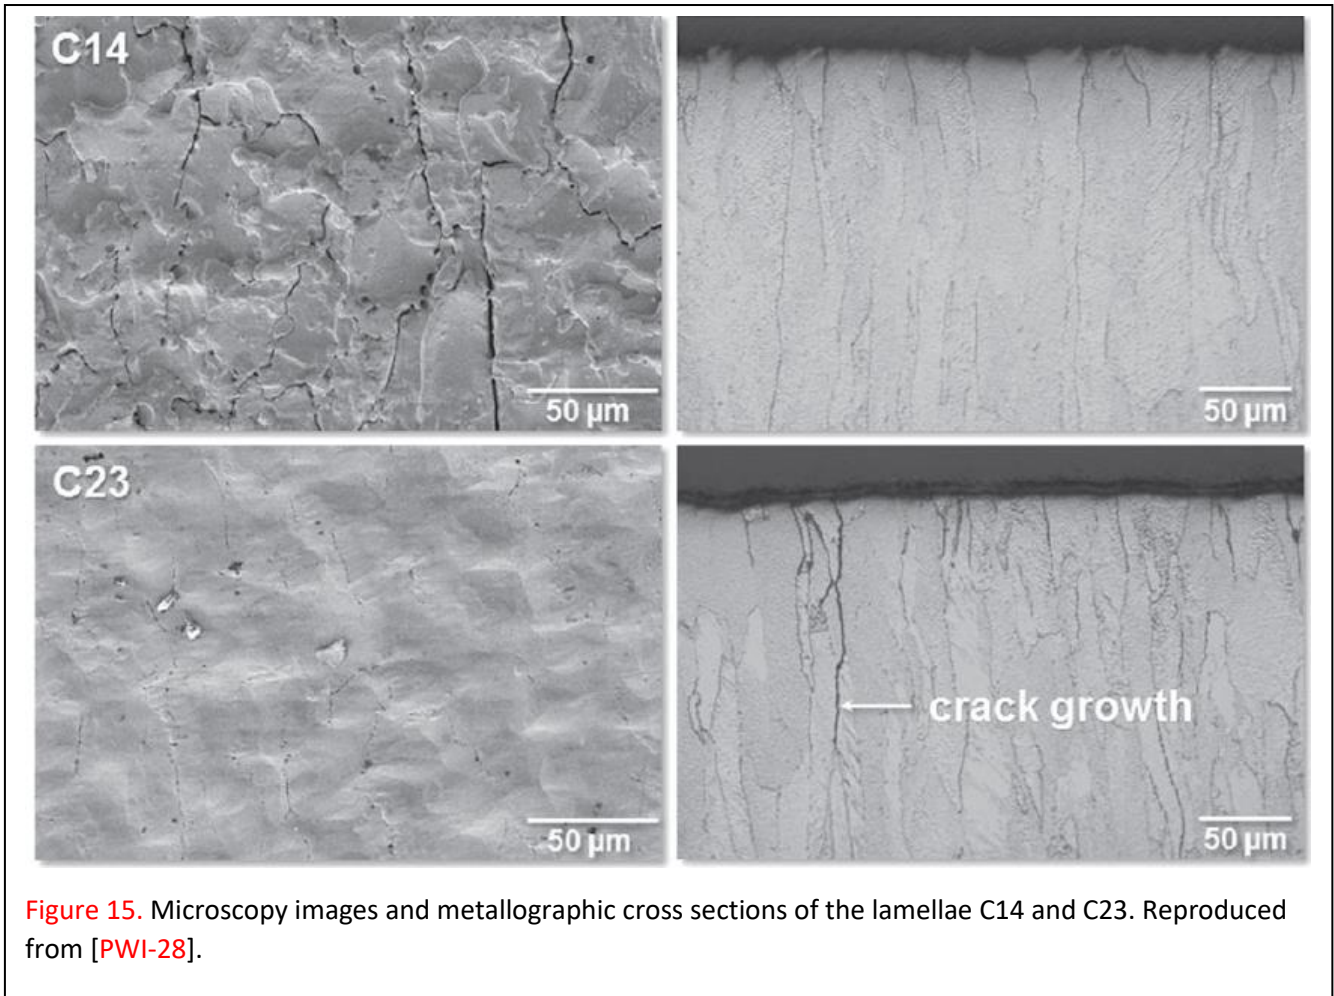
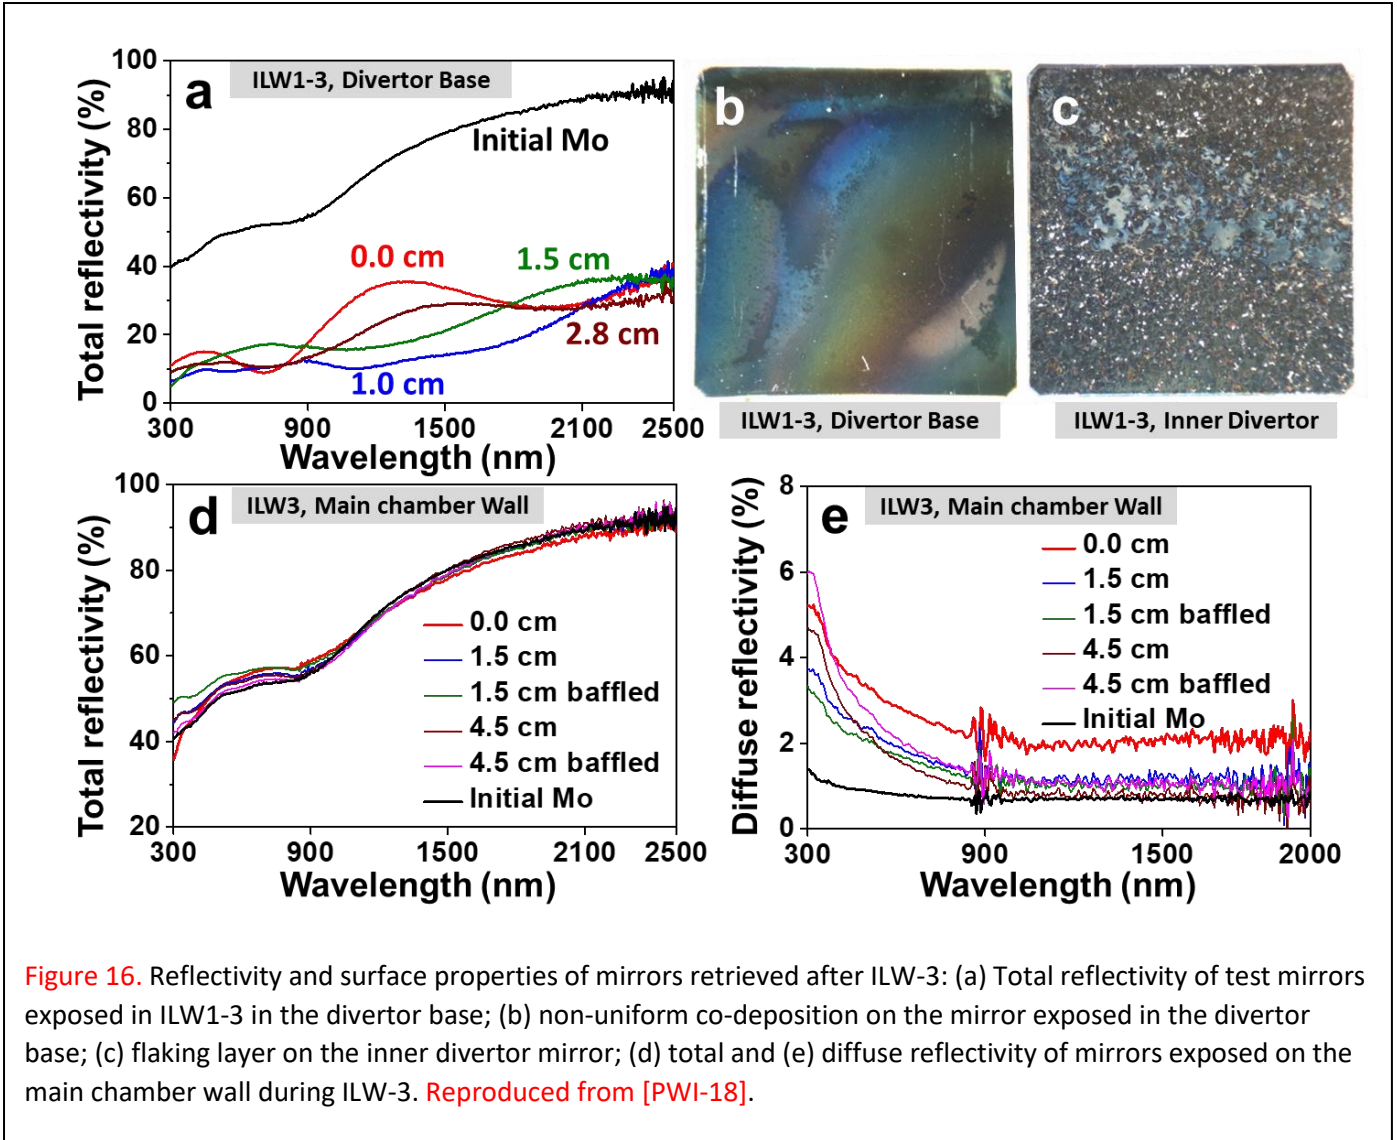


Figure 13. Top to bottom: distributions of deuterium, beryllium and carbon deposition rates (in logarithmic scale), and distribution of strike point positions (linear scale) in the first three JET-ILW campaigns. Vertical dashed lines indicate borders of the divertor tiles. Black numbers on top of the figure denote numbers of the tiles. For Tile 5, data are shown for the lamellae in Stack C, Row 13. **Reproduced from [PWI-10].**







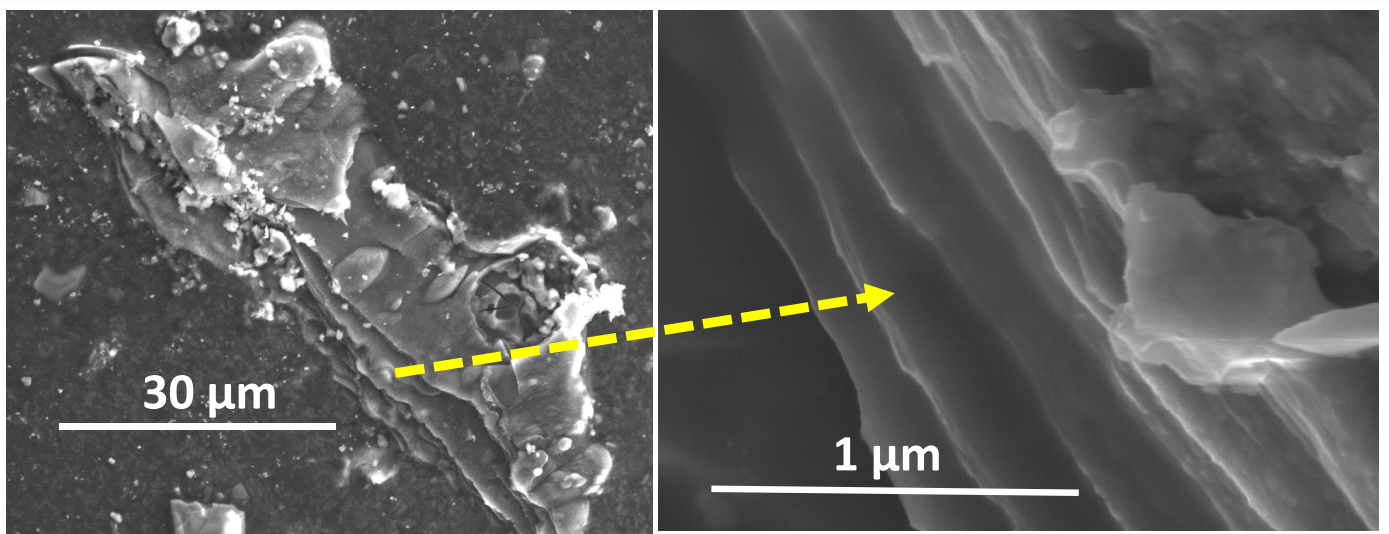


Figure 17. A flake of a stratified co-deposit containing mainly Be and C found on the Mascot wrist. Reproduced from [PWI-29].

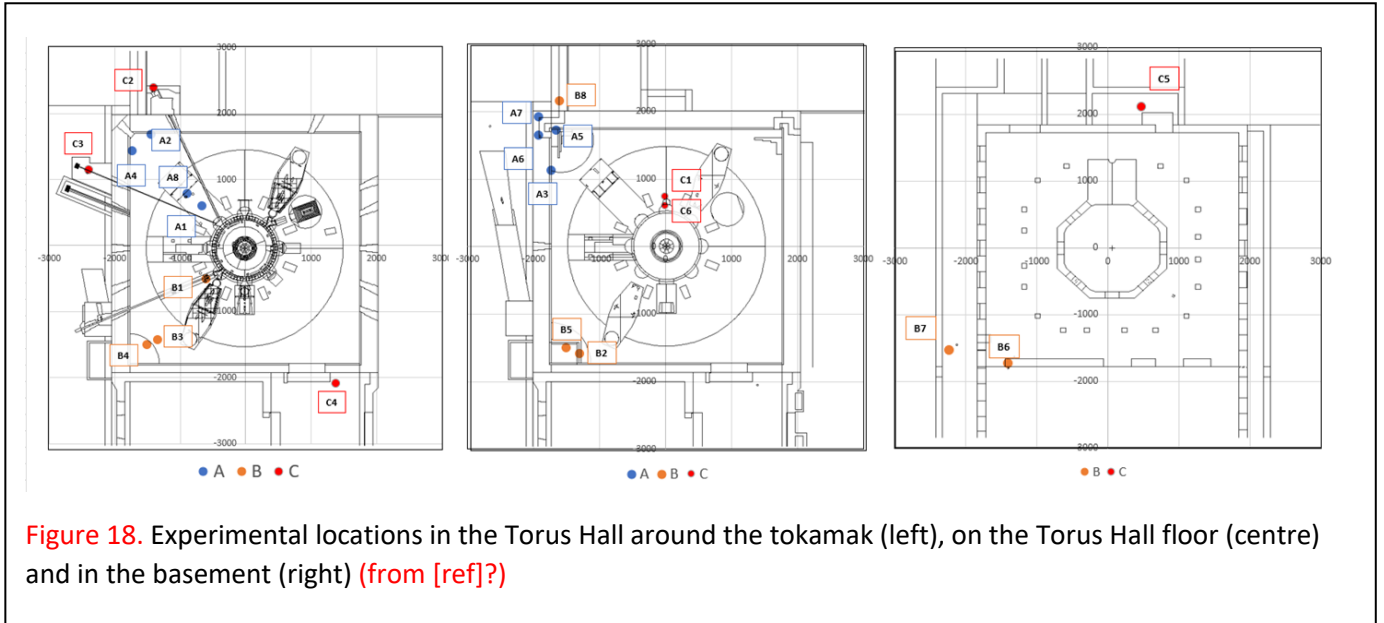


Figure 18. Experimental locations in the Torus Hall around the tokamak (left), on the Torus Hall floor (centre) and in the basement (right) (from [ref]?)

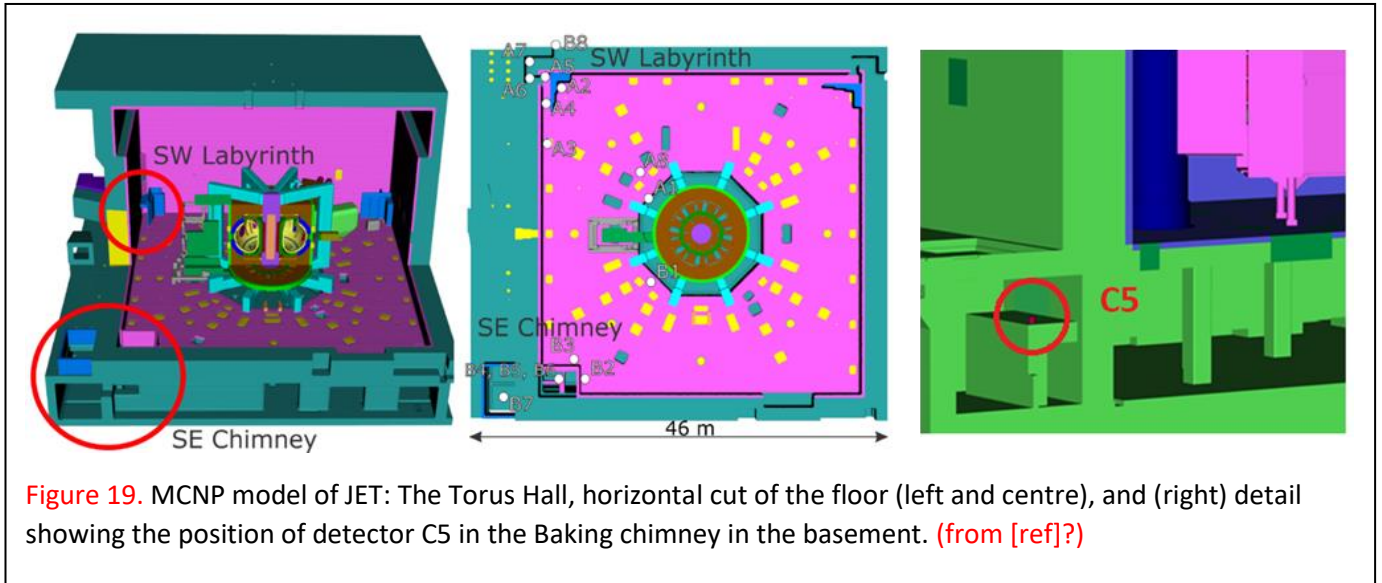


Figure 19. MCNP model of JET: The Torus Hall, horizontal cut of the floor (left and centre), and (right) detail showing the position of detector C5 in the Baking chimney in the basement. (from [ref?])

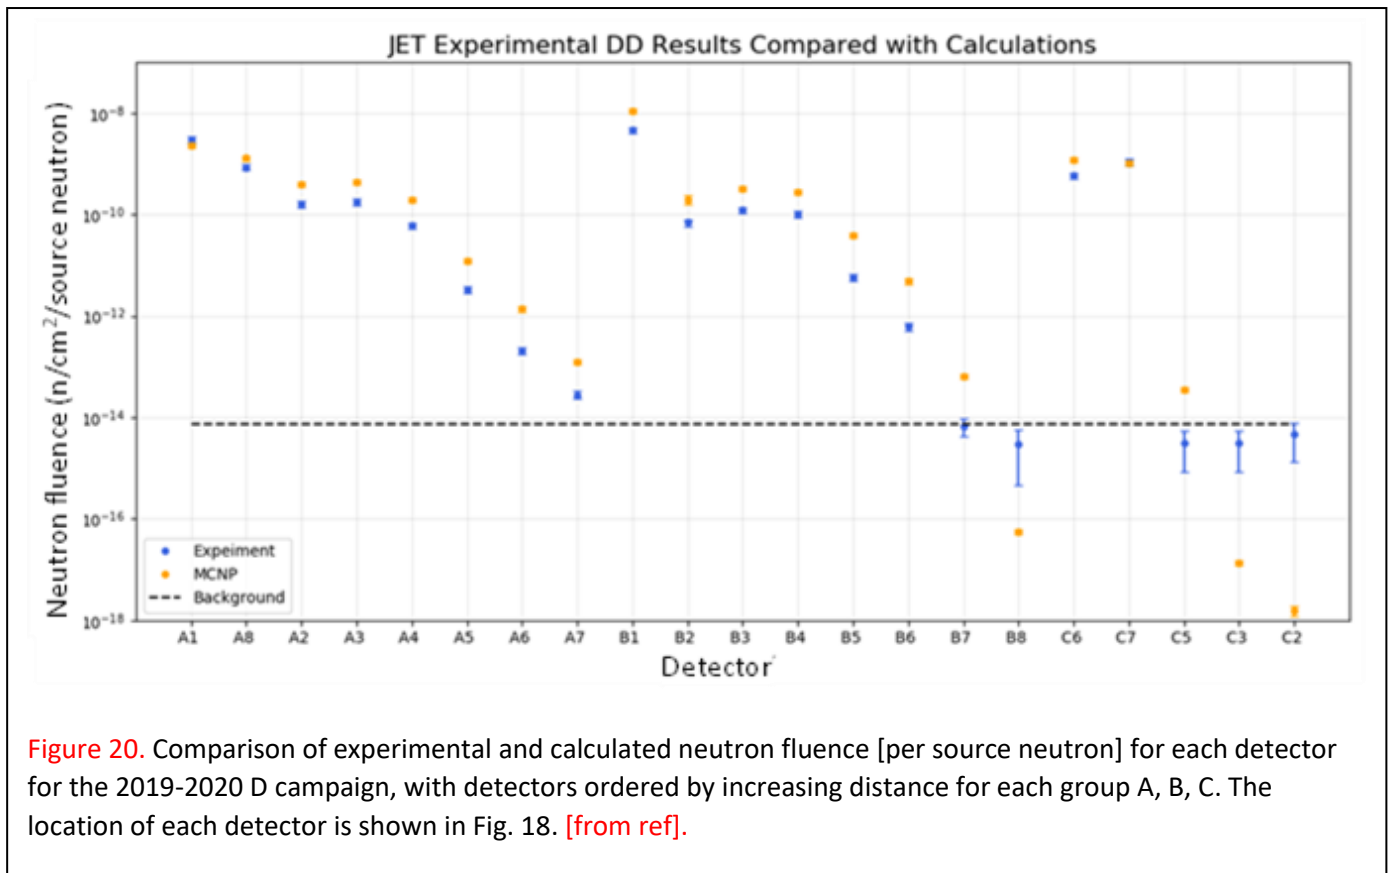


Figure 20. Comparison of experimental and calculated neutron fluence [per source neutron] for each detector for the 2019-2020 D campaign, with detectors ordered by increasing distance for each group A, B, C. The location of each detector is shown in Fig. 18. [from ref].

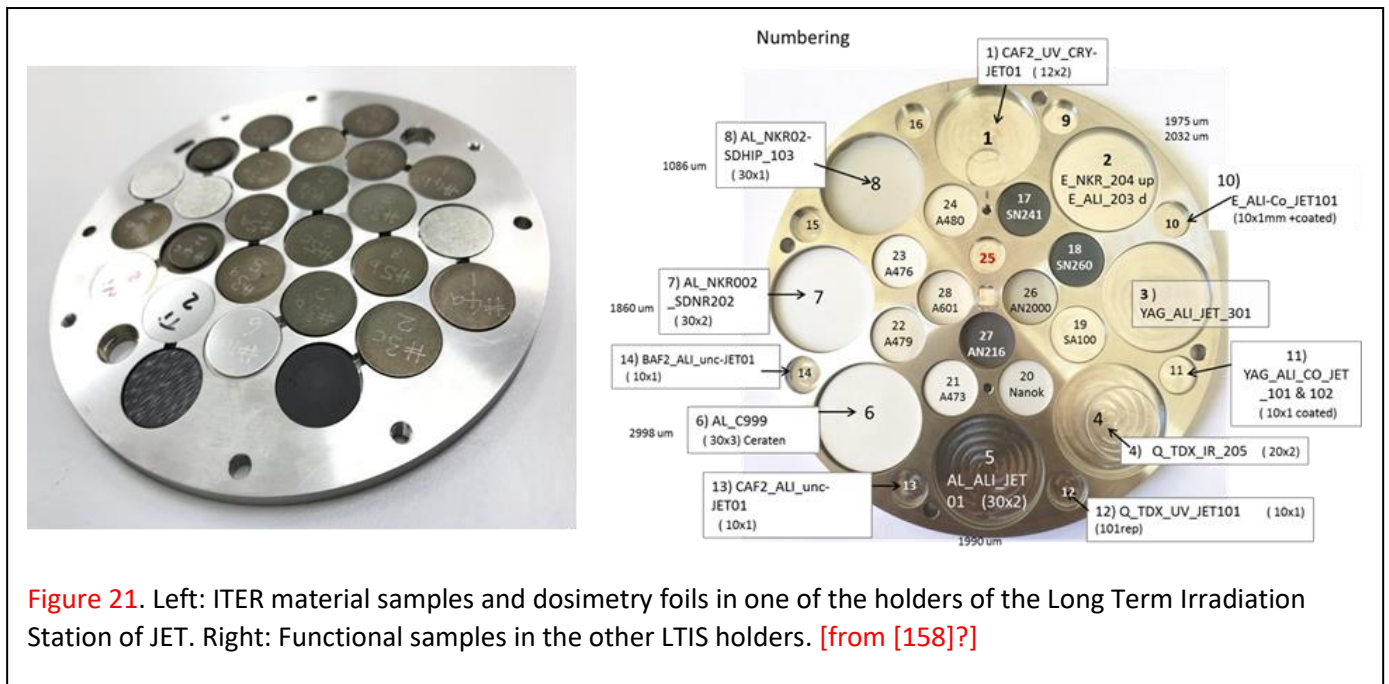


Figure 21. Left: ITER material samples and dosimetry foils in one of the holders of the Long Term Irradiation Station of JET. Right: Functional samples in the other LTIS holders. [from [158]?]

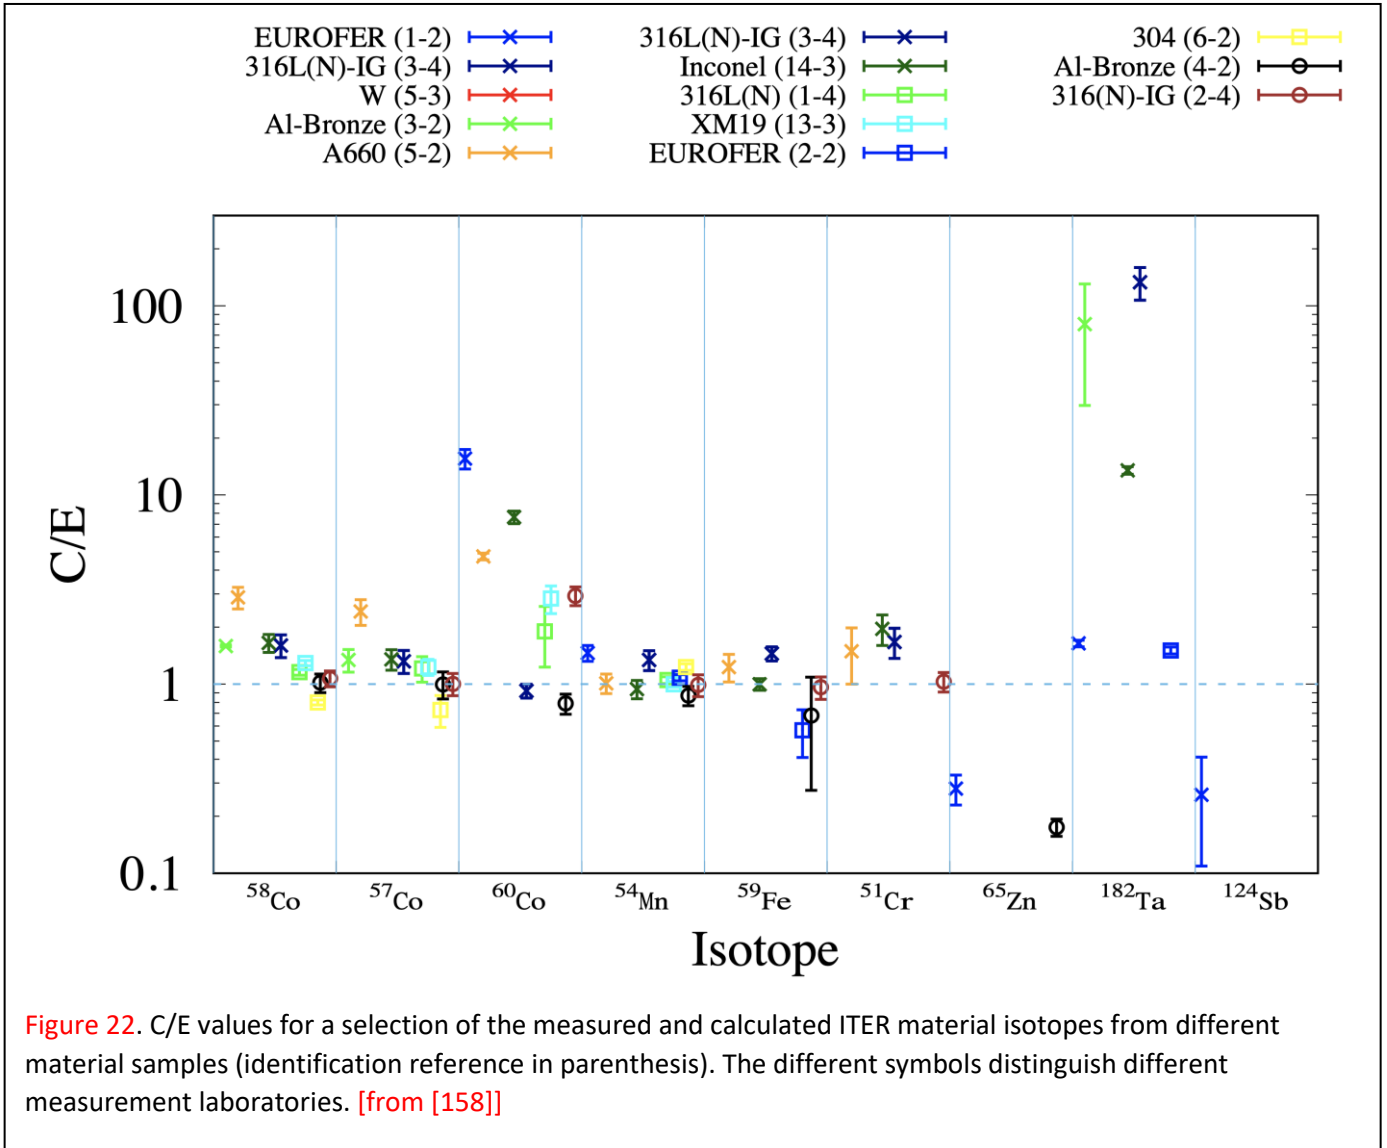


Figure 22. C/E values for a selection of the measured and calculated ITER material isotopes from different material samples (identification reference in parenthesis). The different symbols distinguish different measurement laboratories. [from [158]]

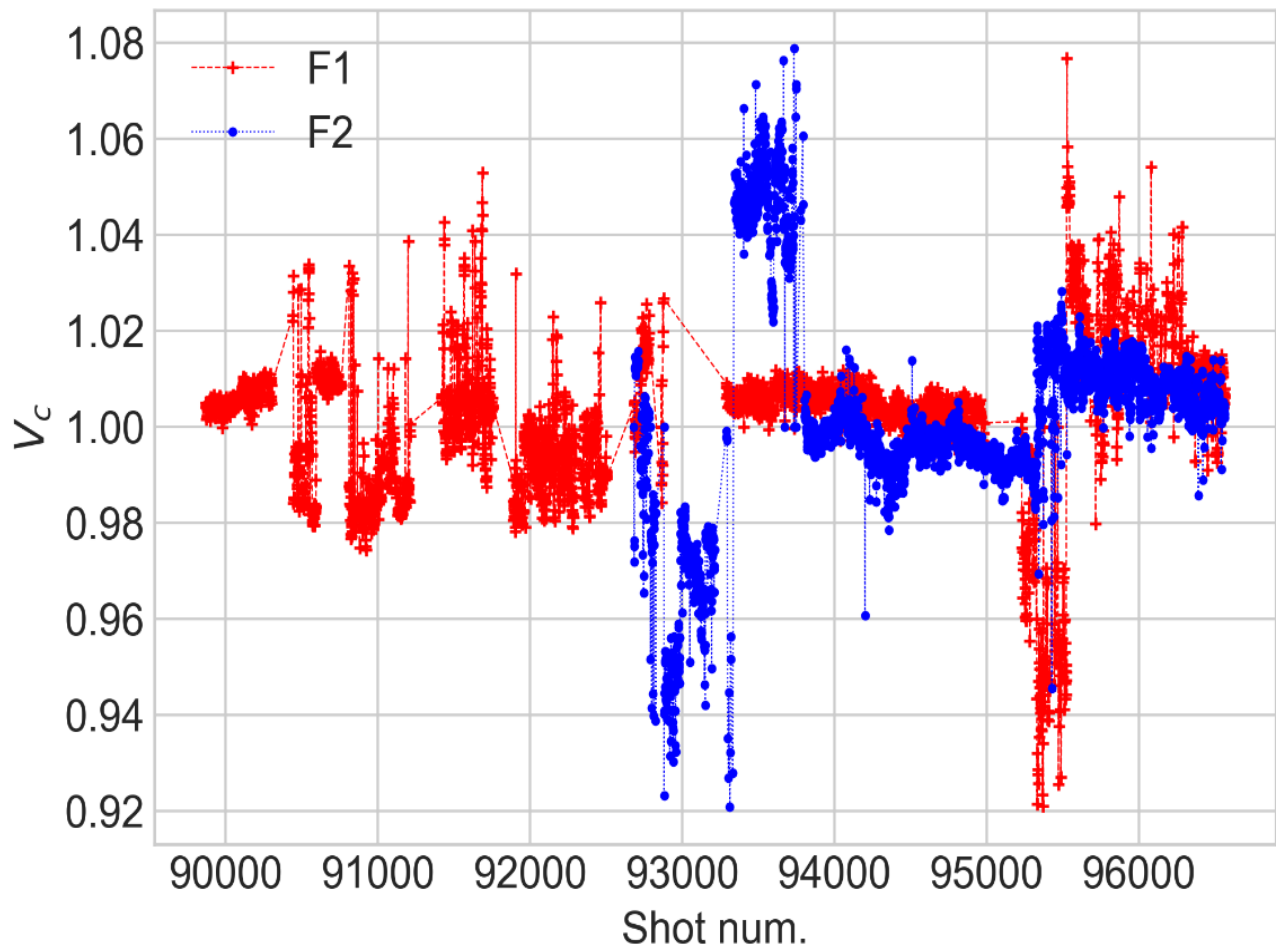


Figure 23. The normalised Verdet constant for FOCS 1 (F1, red) and FOCS 2 (F2, blue) systems during JET operation for shots from 89870 to 96563. The estimated values are 0.696 ± 0.010 and 0.672 ± 0.013 rad/MA, respectively ([from [ref]).