

UKAEA-CCFE-PR(23)108

S Henderson, M Bernert, D Brida, M Cavedon, P  
David, R Dux, O Fevrier, A Jarvinen, A Kallenbach, R  
McDermott, M O Mullane

# **Divertor detachment and reattachment with mixed impurity seeding on ASDEX Upgrade**

Enquiries about copyright and reproduction should in the first instance be addressed to the UKAEA Publications Officer, Culham Science Centre, Building K1/O/83 Abingdon, Oxfordshire, OX14 3DB, UK. The United Kingdom Atomic Energy Authority is the copyright holder.

The contents of this document and all other UKAEA Preprints, Reports and Conference Papers are available to view online free at [scientific-publications.ukaea.uk/](https://scientific-publications.ukaea.uk/)

# **Divertor detachment and reattachment with mixed impurity seeding on ASDEX Upgrade**

S Henderson, M Bernert, D Brida, M Cavedon, P David, R Dux, O Fevrier, A Jarvinen, A Kallenbach, R McDermott, M O Mullane



S Henderson et al.

# **Divertor detachment and reattachment with mixed impurity seeding on ASDEX Upgrade**

Preprint of Paper to be submitted for publication in Nuclear  
Fusion



This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014-2018 and 2019-2020 under grant agreement No 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

This document is intended for publication in the open literature. It is made available on the clear understanding that it may not be further circulated and extracts or references may not be published prior to publication of the original when applicable, or without the consent of the Publications Officer, EUROfusion Programme Management Unit, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK or e-mail [Publications.Officer@euro-fusion.org](mailto:Publications.Officer@euro-fusion.org)

Enquiries about Copyright and reproduction should be addressed to the Publications Officer, EUROfusion Programme Management Unit, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK or e-mail [Publications.Officer@euro-fusion.org](mailto:Publications.Officer@euro-fusion.org)

The contents of this preprint and all other EUROfusion Preprints, Reports and Conference Papers are available to view online free at <http://www.euro-fusionscipub.org>. This site has full search facilities and e-mail alert options. In the JET specific papers the diagrams contained within the PDFs on this site are hyperlinked

# Divertor detachment and reattachment with mixed impurity seeding on ASDEX Upgrade

S. S. Henderson<sup>1</sup>, M. Bernert<sup>2</sup>, D. Brida<sup>2</sup>, M. Cavedon<sup>3</sup>, P. David<sup>2</sup>, R. Dux<sup>2</sup>, O. Février<sup>4</sup>, A. Järvinen<sup>5</sup>, A. Kallenbach<sup>2</sup>, M. Komm<sup>6</sup>, R. McDermott<sup>2</sup>, M. O'Mullane<sup>7</sup> and the ASDEX Upgrade<sup>8</sup> and MST1 teams<sup>9</sup>

<sup>1</sup> United Kingdom Atomic Energy Authority, Culham Centre for Fusion Energy, Culham Science Centre, Abingdon, Oxon, OX14 3DB, UK

<sup>2</sup> Max Planck Institute for Plasma Physics, Boltzmannstr. 2, 85748 Garching, Germany

<sup>3</sup> Department of Physics 'G. Occhialini', University of Milan-Bicocca, Milan, Italy

<sup>4</sup> École Polytechnique Fédérale de Lausanne (EPFL), Swiss Plasma Center (SPC), CH-1015 Lausanne, Switzerland

<sup>5</sup> VTT Technical Research Centre of Finland, FI-02044 VTT, Finland

<sup>6</sup> Institute of Plasma Physics of the CAS, Za Slovankou 3, 182 00 Prague 8, Czech Republic

<sup>7</sup> Department of Physics SUPA, University of Strathclyde, Glasgow, G4 0NG, UK

<sup>8</sup> See author list of U. Stroth et al. Nucl. Fusion 62 (2022) 042006

<sup>9</sup> See author list of B. Labit et al. Nucl. Fusion (2019) 59 086020

E-mail: [stuart.henderson@ukaea.uk](mailto:stuart.henderson@ukaea.uk)

**Abstract.** Using newly developed spectroscopic models to measure the divertor concentration of Ne and Ar, it is shown that the experimental detachment threshold on ASDEX Upgrade with Ar-only and mixtures of Ar+N or Ne+N scales as expected in comparison with an analytical equation derived by Kallenbach et al Plasma Phys. Control. Fusion 58, 045013 (2016). However, it is found that Ar radiates more efficiently and Ne less efficiently in the scrape-off layer (SOL) than the model predicts. By separately increasing the neutral beam injection power and cutting the impurity gas flow, it is shown that the partially detached and strongly detached X-point radiator (XPR) scenarios reattach in  $\approx 100$  ms and  $\approx 250$  ms, respectively. The former timescale is set by the core energy confinement time, whereas the latter has an additional delay caused by the time required for the ionisation front to move from the X-point to the target. A simple equation with scalable geometric terms to predict the ionisation front movement time in future machines is proposed.

## 1. Introduction

Gigawatt-scale fusion power plants will likely have to radiate most of the alpha heating power from the edge plasma on closed field lines and the remaining fraction in the scrape-off layer (SOL). A mixture of impurities with radiation efficiencies tailored to

the distinct plasma regions in the tokamak will likely be injected to achieve this level of radiation [1, 2, 3, 4]. It is known that, for reactor relevant conditions, N radiates mostly in the SOL in the divertor region, Ne and Ar radiate between the SOL and pedestal, and Kr and Xe radiate mostly in the outer layers of the plasma core [5]. Ar and Ne are more efficient SOL radiators than N [6] but in current tokamaks can only be puffed in lower amounts to avoid strong pedestal radiation resulting in degraded core confinement. In ITER and DEMO, a higher temperature gradient is expected in the pedestal, thus screening the core from impurities [7, 8] and making Ar and Ne potential leading choices as SOL radiators [1, 9, 10].

While there has been experimental assessment of the detachment threshold with N across data from JET and AUG [11], there has been no equivalent assessment with reactor relevant Ne and Ar impurities or investigation of the threshold scaling with impurity mixtures. Furthermore, there is also debate around the choice of Ne or Ar in a reactor. Experiments have previously compared detachment with both impurities, however the SOL radiation efficiency is typically masked by its impact on the pedestal radiation and is therefore not directly evident. There is also usually a strong focus on the core plasma properties in seeded impurity scenarios. For example, achieving detachment with Ne-only was only possible in JET ITER-like wall (ILW) scenarios with high heating powers  $> 29$  MW; below this heating level the scenario oscillated between H-mode and L-mode [12]. Moreover, scenarios with Ne-only seeding on ASDEX Upgrade (AUG) were shown to be unstable before detachment could be observed due to an enhanced influx of W driven by changes in pedestal transport and ELM frequency [5]. On the other hand, results from EAST concluded that the compatibility of detachment and core confinement with Ne seeding is actually better than that with Ar seeding [13]. In this paper, focus is given primarily to the impurity radiation efficiency in the SOL, given that their impact on the core conditions varies in different machines. The results in this paper also demonstrate how the simple analytical formula for detachment scaling proposed by Kallenbach *et al* [6] can be extended for impurity mixtures through linear summation of their divertor concentrations.

Finally, this paper examines the divertor reattachment timescale following increases of the neutral beam injection (NBI) power and cuts to the impurity seeding gas flow. A reactor will almost certainly have a feedback control system monitoring the plasma state. Although the choice of sensors and actuators are still highly unclear in a reactor, it is likely that the heat loads and temperature at the divertor will be controlled by gas injection. However, the timescale on which a gas puff needs to actuate in a reactor is not clear and better understanding is needed from current experiments. Results in this paper demonstrate that scenarios with fully detached divertors and a region of intense radiation at the X-point, otherwise known as the X-point radiator (XPR) scenario [14], appear to provide a buffer of the power transient leading to significantly longer reattachment timescales compared to both the weakly detached divertor scenario and the core energy confinement time.

The paper is organised to firstly discuss the topic of detachment scaling and



impurity radiation efficiency in Section 2, then followed by a discussion of the transient reattachment timescales in Section 3. Conclusions are given in Section 4.


## 2. Detachment scaling with mixed impurities

The experiments described in this paper show that pronounced divertor detachment with Ar-only seeding can be obtained on AUG; although operation with Ar-only still often led to issues with scenario stability, similar to Ne-only seeding scenarios. Combining the Ar or Ne seeding with low levels of N<sub>2</sub> seeding improved the scenario stability and facilitated detached scenarios with adequate core performance. The beneficial effect of combining Ar or Ne seeding with N<sub>2</sub> seeding is also found on JET [15].


The experimental database of measurements used in this analysis were taken from ELMy H-mode plasma scenarios with a plasma current  $I_P = 1$  MA. An example of key plasma traces are shown in Fig. 1. The auxiliary heating power comprised of electron and ion cyclotron heating (ECRH, ICRF) with each system delivering  $\approx 2$  MW, and the remaining power injected by 3 – 5 NBIs, each with  $\approx 2.5$  MW. The confinement relative to the ITER physics base  $H_{98(y,2)}$  scaling was between 0.8 – 1.2 (see Fig. 3b discussed in Sec. 2.2) and the core  $Z_{\text{eff}}$  was typically between 1.5 – 2.5. The plasma scenarios all had similar geometry with a vertical inner and outer divertor as shown in Fig. 2, an elongation and triangularity of  $\kappa \approx 1.7$  and  $\delta \approx 0.23$ , and a toroidal magnetic field and major radius of  $B_T = 2.5$  T and  $R_{\text{maj}} = 1.65$  m, respectively.

The reference plasma scenario, shown by the black traces for AUG #38775 in Fig. 1 (left column), had constant heating and D<sub>2</sub> fuelling, while Ar was injected using a feedback control system actuating on the power crossing the separatrix derived from heating power and radiation from bolometry in real-time. Without this feedback control, the scenario would typically become unstable due to a loss of ELM frequency resulting in a build up of density (AUG #37481 demonstrates this effect with feedforward Ar-only seeding). The N<sub>2</sub> and Ne seeding gas was added with feedforward flow waveforms. In future, based on this experience, it would be worth testing Ne injection using the same control system as used for Ar injection. The gas valve injection locations for each species is indicated in Fig. 2a.

To assess the detachment threshold, the reference scenario was repeated with different D<sub>2</sub> fuelling rates ranging from  $0.8 - 3.2 \times 10^{22}$  elec/s providing a scan of the divertor neutral pressure from  $0.7 < p_0 < 2.5$  Pa, injected powers ranging from  $11 < P_{\text{inj}} < 16.5$  MW, and with powers crossing the separatrix ranging from  $5 < P_{\text{sep}} < 12$  MW remaining at least a factor of 2 above the LH power threshold scaling. Scenarios with NBI power increase or impurity gas cuts during the pulse were primarily used to assess the divertor reattachment timescale (as discussed in Section 3) but were also programmed to remain stable for at least 1 second to provide data for the steady state database. The evolution of the singly ionised impurity line intensity (i.e. Ne II, Ar II, and N II) during a scenario with power increases is demonstrated in Figs. 2b-d. The N II and Ar II line intensities are localised near the strike-point in attached

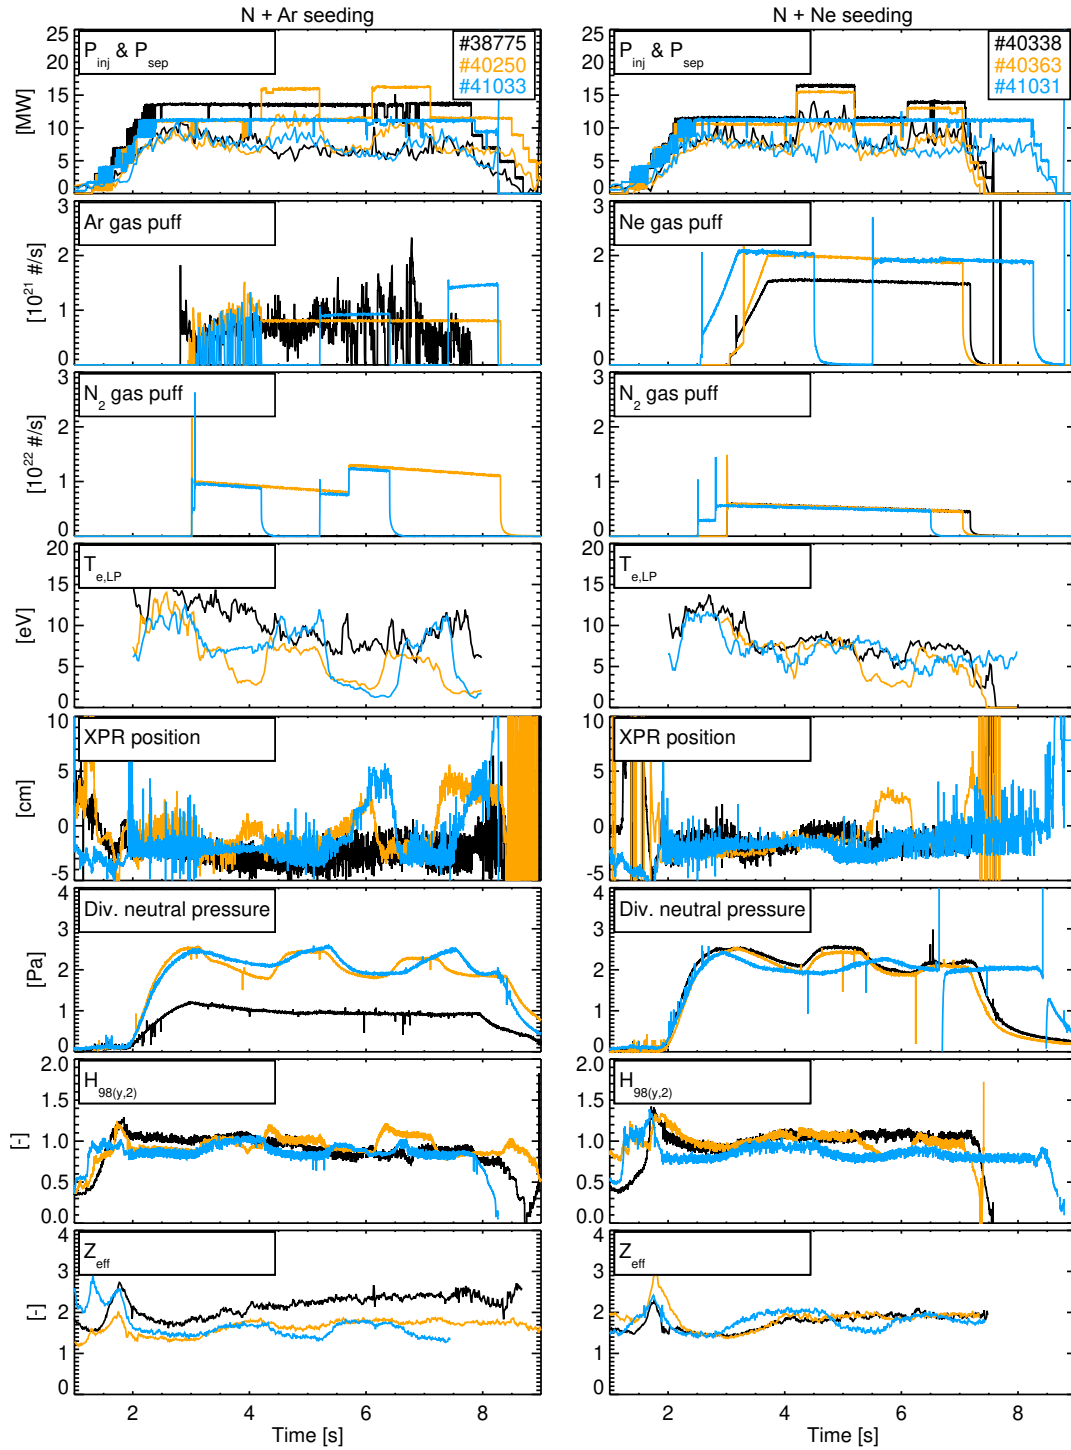

**Figure 1.** Examples of 1 MA ELMy H-mode plasma scenarios on AUG with mixed impurity seeding. From the top, the panels show the power injected and crossing the separatrix, the impurity seeding gas valve fluxes, the temperature at the target measured by probes, the position of the XPR above the X-point, the divertor neutral pressure measured by baratrons, the  $H_{98(y,2)}$ , and the  $Z_{\text{eff}}$ . The left and right panels show scenarios with  $\text{N}_2$  and Ar and with  $\text{N}_2$  and Ne seeding, respectively.

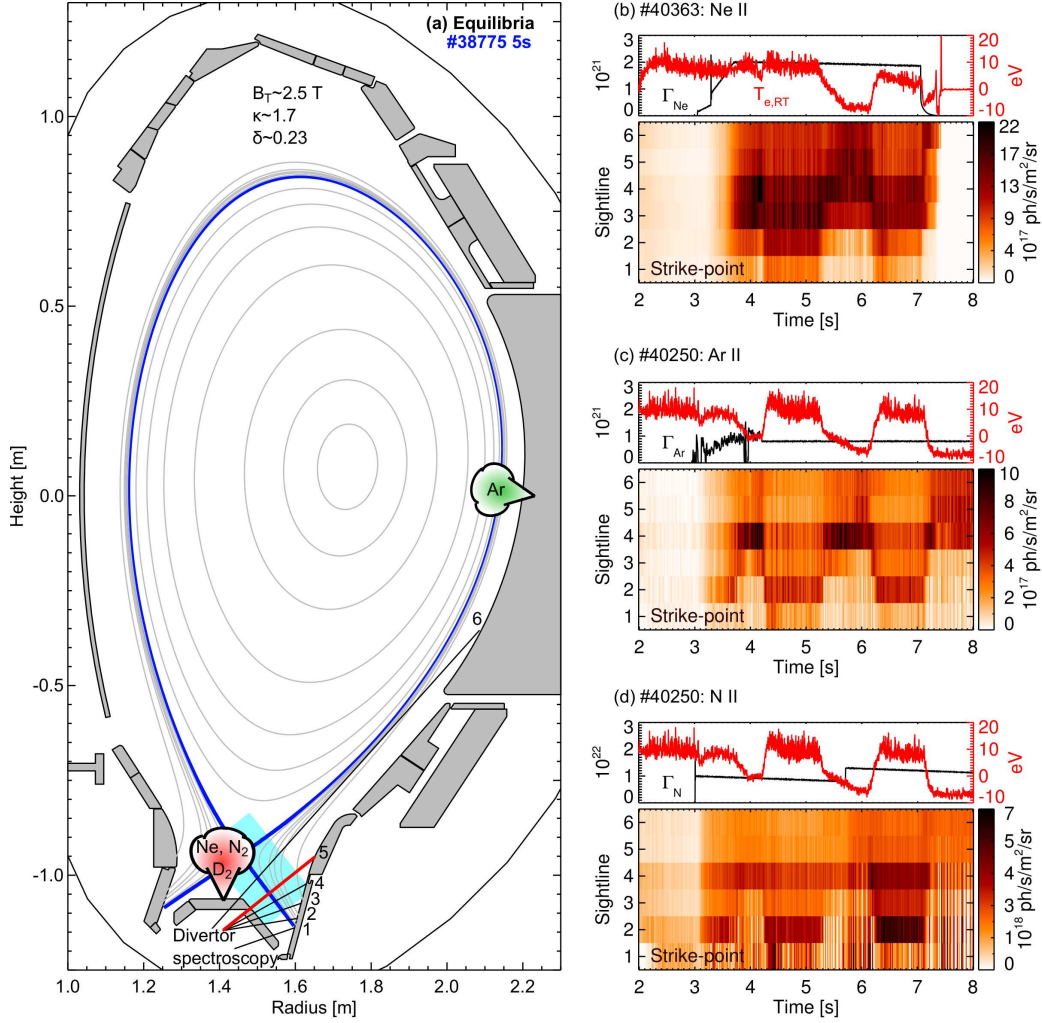

**Figure 2.** The magnetic equilibrium and the location of the gas valve injection location are shown in (a). (b)-(d) show the time traces of the real-time divertor temperature, impurity gas valve flux, and the line intensities of Ne II, Ar II, and N II measured in the inter-ELM phases through the line of sight (LOS) indicated in (a). The line intensities measured through the red LOS are used to calculate the impurity concentrations. The blue shaded region in the outer divertor corresponds to a poloidal area of  $0.04 \text{ m}^{-2}$  used to estimate the volume of neutrals in fully detached scenarios.

phases and peak in line of sight (LOS) 4 (see LOS numbering in Fig. 2a) during the phases of XPR. Due to the N II and Ar II line intensities tending to peak at  $\approx 5$  eV they are a good indicators for the poloidal location of the deuterium ionisation front. The Ne II line intensity is peaked further away from the strike-point in LOS 3–4 during the attached phases, and then peaks in LOS 5–6 during the phases of XPR. As discussed in Sec. 2.2, it is thought that the Ne II line intensity peaks further away from the target due to its larger first ionisation potential (FIP).


### 2.1. Detachment qualifier

While there have been a number of published scaling laws for the detachment threshold [16, 17, 18, 19, 20] and comparisons to high fidelity SOL models [21, 22], they typically depend on the electron separatrix density,  $n_{e,sep}$ , which is hard to measure due to uncertainty in the separatrix position. This report focuses on the analytical equation for the partial detachment point developed from comparison of a 1D SOL model to an experimental scaling of the detachment threshold for N-seeded plasmas on AUG (Kallenbach *et al* see Eq. 9 in [6]):

$$q_{det} = 1.3 \frac{P_{sep}}{R_{maj}} \frac{5 \text{ mm}}{\lambda_{int}} \left( \frac{1.65 \text{ m}}{R_{maj}} \right)^{0.1} \left( \left( 1 + \sum_Z f_Z c_Z \right) p_0 \right)^{-1} \quad (1)$$

This equation replaces the dependency of  $n_{e,sep}$  with the divertor neutral pressure,  $p_0$ , which is directly measured on AUG. Pronounced detachment is predicted at  $q_{det} < 1$  and partial detachment at  $q_{det} \approx 1$ .  $P_{sep}$  is the difference between the absorbed heating power and the main chamber radiation.  $\lambda_{int} = \lambda_q + 1.64S$  is the broadened SOL power width due to the effect of power spreading. Since Eq. 1 was derived based on measurements from 1 MA scenarios, the same as used in the scenarios presented here, it is assumed that  $5 \text{ mm}/\lambda_{int} \approx 1$ .  $f_Z c_Z$  is the product of the radiation efficiency and impurity concentration, respectively. Note the inclusion of the summation over all impurities is introduced in this paper and is not part of the original model. It is noted that this simple detachment threshold formula assumes the effect of the divertor pressure and the impurities to be linear or independent. In reality, there may be second order cross terms, for example concerning the effect of charge exchange on the impurity radiation, and this is not addressed in this paper.

The radiation efficiency,  $f_Z$ , for the different impurities is a parameter representing the stronger radiation capability of the impurity in comparison to D. In principle, this parameter can be derived from atomic data. However, a non-coronal parameter  $n_e \tau$  is usually needed to represent the enhancement to the radiation caused by impurity transport in the SOL. A smaller value of  $n_e \tau$  tends to enhance the ion abundance towards hotter temperatures, effectively increasing the impurity radiation efficiency. Since  $n_e \tau$  is difficult to predict,  $f_Z$  is effectively used as a fitting parameter between model and experiment. A value of  $f_N = 18$  was gauged experimentally [23] and the 1D model reproduced this result using  $n_e \tau = 0.5 \times 10^{20} \text{ ms m}^{-3}$  [6]. The same  $n_e \tau$  was then used for other impurities to show that partial detachment could be achieved with  $\approx 2 \times$  more C,  $\approx 2.5 \times$  less Ne, and  $\approx 5 \times$  less Ar, respectively, compared with N implying that  $f_C = 10$ ,  $f_{Ne} = 45$ , and  $f_{Ar} = 90$ . If  $n_e \tau$  is different for each impurity or the fundamental atomic data is wrong, then these estimated radiation efficiency coefficients will also be wrong. The next subsections detail how  $f_{Ne}$  and  $f_{Ar}$  are gauged experimentally, with the results indicating values higher for Ar and lower for Ne.

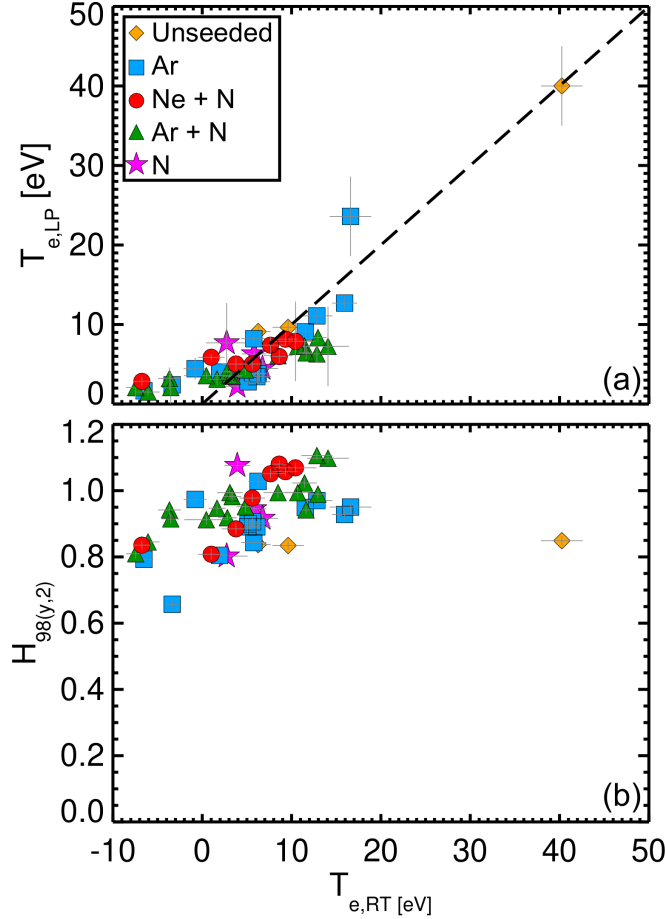


**Figure 3.** Comparison of the (a) probe target temperature measurements and (b)  $H_{98(y,2)}$  factor as a function of the real-time divertor temperature.

## 2.2. Relevant measurements

The power crossing the separatrix is calculated using  $P_{\text{sep}} = P_{\text{in}} - P_{\text{rad,core}} - dW/dt$ , where  $P_{\text{in}}$  is the total input power (including Ohmic power),  $P_{\text{rad,core}}$  is the core radiation measured using bolometry [24], and  $W$  is the core plasma stored energy. The divertor pressure is measured by a baratron connected by a pipe below the high field side divertor (for a simplified CAD view see Fig. 3 of [25]).

The inter ELM measurements from the Langmuir probes operated as triple probes [26] were used to assess the detachment state, providing the target electron temperature,  $T_{e,LP}$ , parallel heat flux,  $q_{\text{par,LP}}$ , and electron density,  $n_{e,LP}$ . Strike-point sweeps were not performed in this database, and therefore the target quantities were derived by averaging all available data points measuring within 4 cm of the strike-point (typically consisting of two probes). A comparison of  $T_{e,LP}$  with the real-time target temperature measurements,  $T_{e,RT}$ , determined from the inter ELM shunt measurement [23] is shown in Fig. 3a. Generally good agreement is found between the two measurements above 5 eV as found in previous studies [23, 26]. Negative  $T_{e,RT}$  indicates a vanishing thermoelectric current and is a robust indicator of pronounced detachment with the formation of the XPR [23].

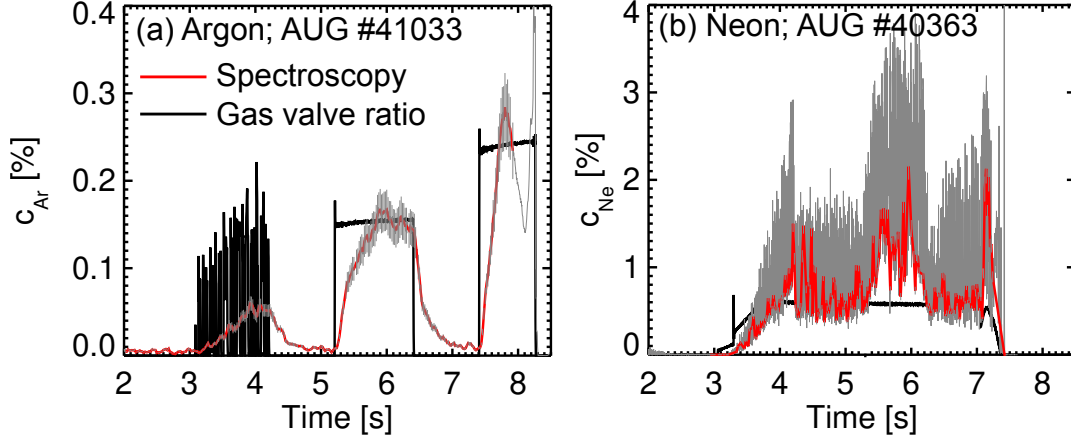

**Figure 4.** Impurity concentrations measured using spectroscopy are shown in grey, with the red lines showing the inter ELM values. The black lines show the equivalent estimation of the impurity concentration using the ratio of gas valve fluxes.

The probe measurements are also used in the next section to determine the momentum loss factor,  $f_{\text{mom}} = 2n_{e,\text{LP}}T_{e,\text{LP}}/T_{e,\text{sep}}n_{e,\text{sep}}$ , providing an additional assessment of the divertor conditions. The upstream separatrix electron temperature,  $T_{e,\text{sep}}$ , and density,  $n_{e,\text{sep}}$ , are estimated under the assumption of Spitzer-Härm electron conduction and with a scaling of the divertor neutral pressure [25].

Confinement  $H_{98(y,2)}$  scaling factors are shown in Fig. 3b as a function of  $T_{e,\text{RT}}$ . The analysed seeded scenarios typically show  $H_{98(y,2)} > 0.9$  when  $T_{e,\text{RT}} > 10$  eV. As  $T_{e,\text{RT}}$  drops to negative values associated with pronounced detachment, the confinement tends to drop to  $H_{98(y,2)} \approx 0.8$  which is consistent with recent results from JET [27]. A more significant drop to  $H_{98(y,2)} \approx 0.65$  was found in an Ar seeded scenario with 16.5 MW of heating power and  $\approx 2\%$  Ar concentration (AUG #37493) which resulted in an XPR. The database also shows that the mixed Ar+N scenarios typically had higher  $H_{98(y,2)}$  compared to Ar-only scenarios.

Impurity concentrations,  $c_Z$ , are determined using divertor spectroscopy, using the line intensity measured through the red LOS indicated in Fig. 2a (i.e. LOS 5). The spectroscopic model for  $c_N$  has already been developed [28, 29, 11] and the equivalent models for  $c_{Ne}$  and  $c_{Ar}$  are described in Appendix A. Comparisons of the divertor  $c_Z$  with the ratio of gas valve fluxes (i.e.  $c_Z = \frac{\Gamma_Z/Z}{\Gamma_Z/Z + \Gamma_D}$  where  $\Gamma$  is the valve flux in elec/s) are shown in Fig. 4, though the latter is only valid after at least  $\approx 0.5$  s of constant seeding. Generally, there is agreement within  $\approx 20\%$  between the two measurements during the steady state inter-ELM phases. The  $c_{Ne}$  inter-ELM measurement is considerably lower than the intra-ELM signal driven mainly by the increase in Ne II line intensity. For this to occur, there needs to be a significant population of neutrals in the vicinity of the sightline that are ionised during the ELM. Conversely,  $c_{Ar}$  shows little difference between intra-ELM and inter-ELM measurements. Previous AUG measurements showed a stronger difference between the inter-ELM and intra-ELM measurements for  $c_N$  measured through a sightline viewing closer to the

target (e.g. Fig. 4 of [28]). This result is consistent with Ne neutrals having a longer ionisation mean free path in comparison to N or Ar due to the first ionisation potential (FIP) effect. The neutral atom ground state ionisation energies taken from NIST [30] are  $\approx 15$  eV for N and Ar and  $\approx 22$  eV for Ne. Collisional-radiative effects may alter the effective ionisation rate for each impurity, however high quality data to assess this does not yet exist for Ar (although work towards this is underway [31]).

Finally, it is noted that  $c_{\text{Ne}}$  increases by a factor 2 compared to the estimated value from the gas valve flux ratio in phases of deep detachment which is due to the assumption of constant electron temperature in the model becoming less accurate (see Appendix A). Therefore, in these deeply detached phases, the gas valve flux ratio is used to estimate  $c_{\text{Ne}}$ .

### 2.3. Spectroscopy results

The experimental  $q_{\text{det}}$  is inferred from measurements described in the previous section averaged over 300 ms in steady state phases of each pulse. The results are shown as a function of  $q_{\text{par,LP}}$  and  $T_{\text{e,LP}}$  in Fig. 5a and Fig. 5b, respectively. Although there is no prior evidence to suggest that these quantities should vary linearly with  $q_{\text{det}}$ , a best-fit dashed line with linear dependence is shown for reference and shows reasonable agreement to the data, more so for  $T_{\text{e,LP}}$ . Figs. 5e and f show a roll-over in  $n_{\text{e,LP}}$  and sudden drop in  $f_{\text{mom}}$  once the divertor temperature falls below  $\approx 6$  eV.

The experimental data in Fig. 5a-b show that the estimated values of  $f_{\text{Ne}} = 45$  and  $f_{\text{Ar}} = 90$  tend to marginally under-predict the  $c_{\text{Ne}}$  and over-predict the  $c_{\text{Ar}}$  required to reach partial detachment compared to a best-fit line with linear dependence combining data from all impurity mixtures. The data is now used to find values of  $f_{\text{Ne}}$  and  $f_{\text{Ar}}$  that provide better consistency between the different impurity mixtures. This is done by finding values of  $f_{\text{Ne}}$  and  $f_{\text{Ar}}$  which satisfy a criteria gauged on the N-only data:


$$q_{\text{det}}[T_{\text{div,LP}} < 6 \text{ eV}] < 2.5 \quad (2)$$

$$q_{\text{det}}[T_{\text{div,LP}} > 6 \text{ eV}] > 1.9 \quad (3)$$

$$q_{\text{det}}[T_{\text{div,LP}} > 10 \text{ eV}] > 2.0 \quad (4)$$

Values of  $f_{\text{Ne}}$  and  $f_{\text{Ar}}$  satisfying the criteria were  $f_{\text{Ne}} = 15 - 50$  and  $f_{\text{Ar}} = 175 - 200$ . The results using the average value of the acceptable ranges are shown in Fig. 5c and d. These values improve the goodness of fit  $R^2$  between the data and the best-fit line, and moves the best-fit prediction closer to unity at  $T_{\text{e,LP}} \approx 1$  eV. Notably, this also opens the possibility of using  $q_{\text{det}}$  more generally to predict the target temperature and heat loads. However, such a model would have some uncertainty due to the probe measurements below 2–3 eV being typically unreliable.


Since the Ne seeded cases were mixed with N, it is possible that a lower N efficiency could instead be used to satisfy the model. However, if this lower value of  $f_{\text{N}}$  were used consistently then it would mean that the N-only and Ar+N data would no longer satisfy the criteria. Furthermore, the model in Eq. 1 assumes a constant impurity

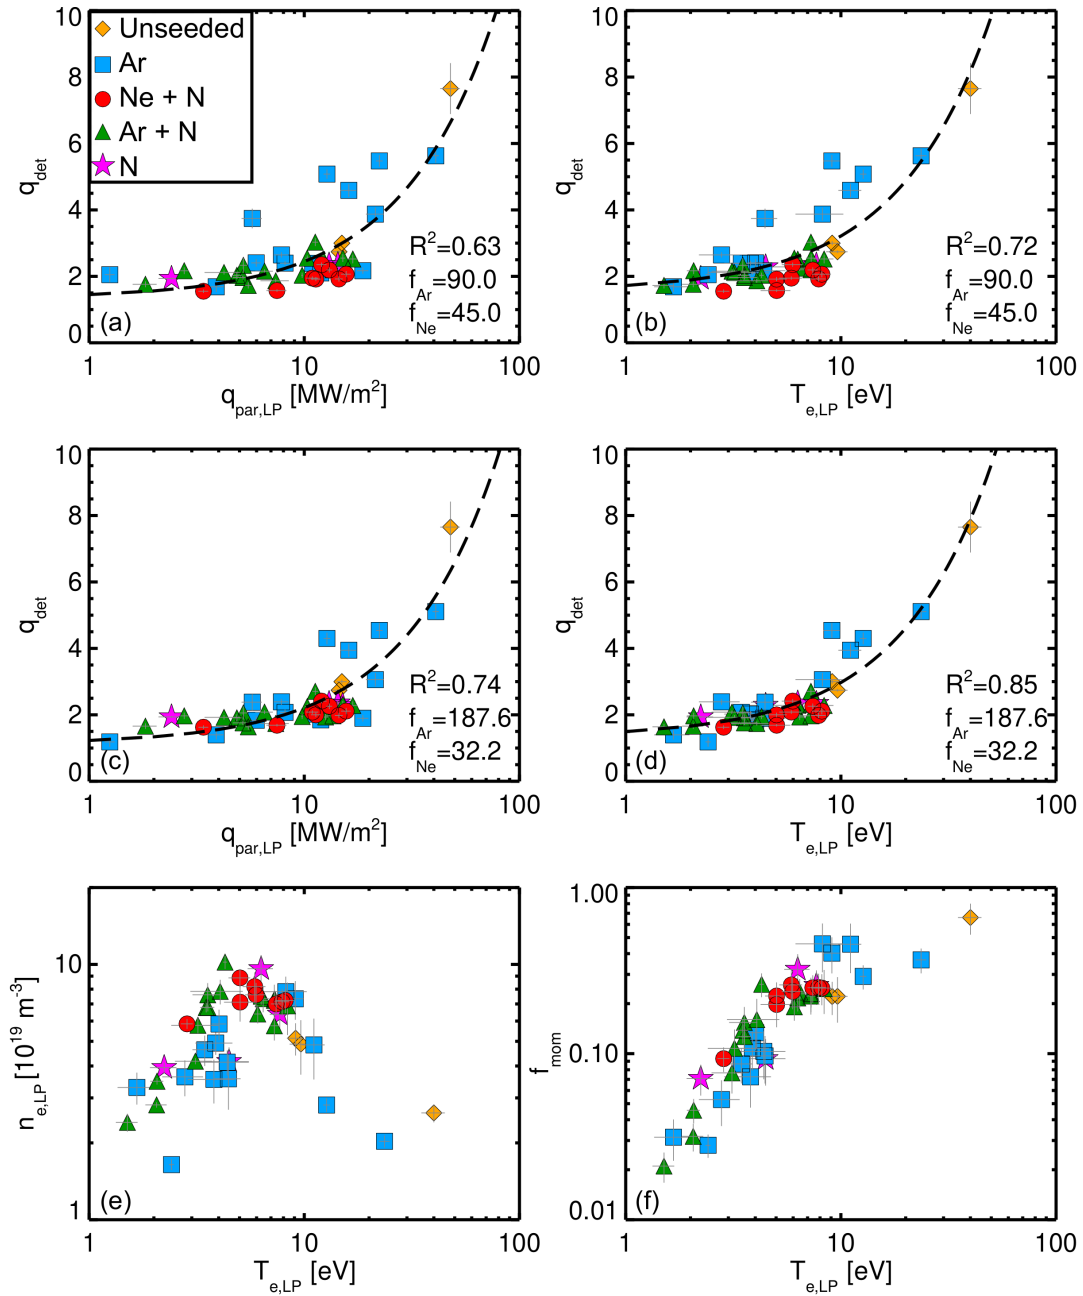

**Figure 5.** The detachment qualifier for different impurity mixtures (including non-seeding phases for comparison) are plotted against the inter-ELM probe measurements at the target of (a) parallel heat flux and (b) electron temperature. (c) and (d) show the values when using the updated the radiation efficiencies for Ne and Ar. A best-fit line with linear dependence and statistical  $R^2$  values are shown for comparison in each case. To assess the detachment state, the target electron density and moment loss factor are plotted against target temperature in (e) and (f), respectively.

concentration in the SOL and therefore, since the upstream SOL impurity concentration is not available, it is assumed that the divertor impurity concentration is equal to the average SOL concentration. This assumption could impact the analysis of the radiation efficiency, but it is not expected to change the overall conclusion.



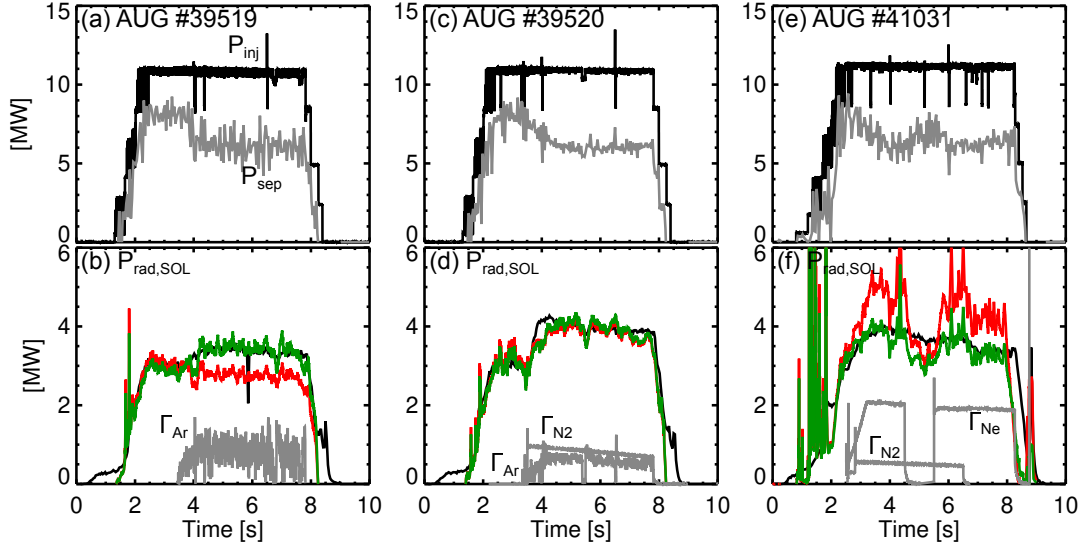

**Figure 6.** The injected power and separatrix powers are shown for three shots in the top panels. The total power radiated in the SOL is shown by the black lines in the bottom panels. Modelled values are shown by the red lines, using  $f_{N,Ne,Ar} = 18, 45, 90$ , and the green lines, using  $f_{N,Ne,Ar} = 18, 30, 200$ . For reference, the impurity gas valve fluxes are shown by the grey lines.


#### 2.4. Bolometry results

Another approach to measuring the radiation efficiency is to assess the total radiation in the SOL (including divertor, XPR, and main chamber SOL) measured using bolometry. For clarity, the measured  $P_{\text{rad,SOL}}$  is defined as  $P_{\text{rad,SOL}} = P_{\text{rad,tot}} - P_{\text{rad,sepmain}}$ , using the same nomenclature as shown in Fig. 5 of [24]. A simple model is proposed to assess the SOL radiation:

$$P_{\text{rad,SOL}} = \left( \frac{P_{\text{sep}}}{6 \text{ MW}} \right) \left( C \sum_Z f_Z c_Z + P_{\text{back}} \right) \quad (5)$$

where  $C$  is a free parameter with units in MW and  $P_{\text{back}}$  is the background radiation estimated using the radiation measured before seeding occurs. The normalised  $P_{\text{sep}}$  is included to account for the relatively linear dependence with  $P_{\text{rad,SOL}}$ . The spectroscopic  $c_Z$  measurements described previously are again used in this model.

The model first assumes a set of  $f_Z$  and then tunes  $C$  to achieve the best fit to the data from one shot. This value of  $C$  is then used consistently among other shots. In this example, the model is tuned on AUG #39520 which has Ar+N seeding and then compared to an Ar-only (AUG #39519) and Ne+N (AUG #41033) scenario. To simplify the analysis, these discharges were chosen due to their similar  $P_{\text{sep}}$ . The results from the model are shown in Fig. 6. The red and green lines show the results using  $f_{N,Ne,Ar} = 18, 45, 90$  and  $f_{N,Ne,Ar} = 18, 30, 200$ , respectively. The red curves give worse agreement overall, and values of  $f_Z$  similar to those found in the analysis of  $q_{\text{det}}$  agree better with the bolometer data proving that the new parameters for  $f_Z$  provide better consistency overall with experimental data than previous estimates.

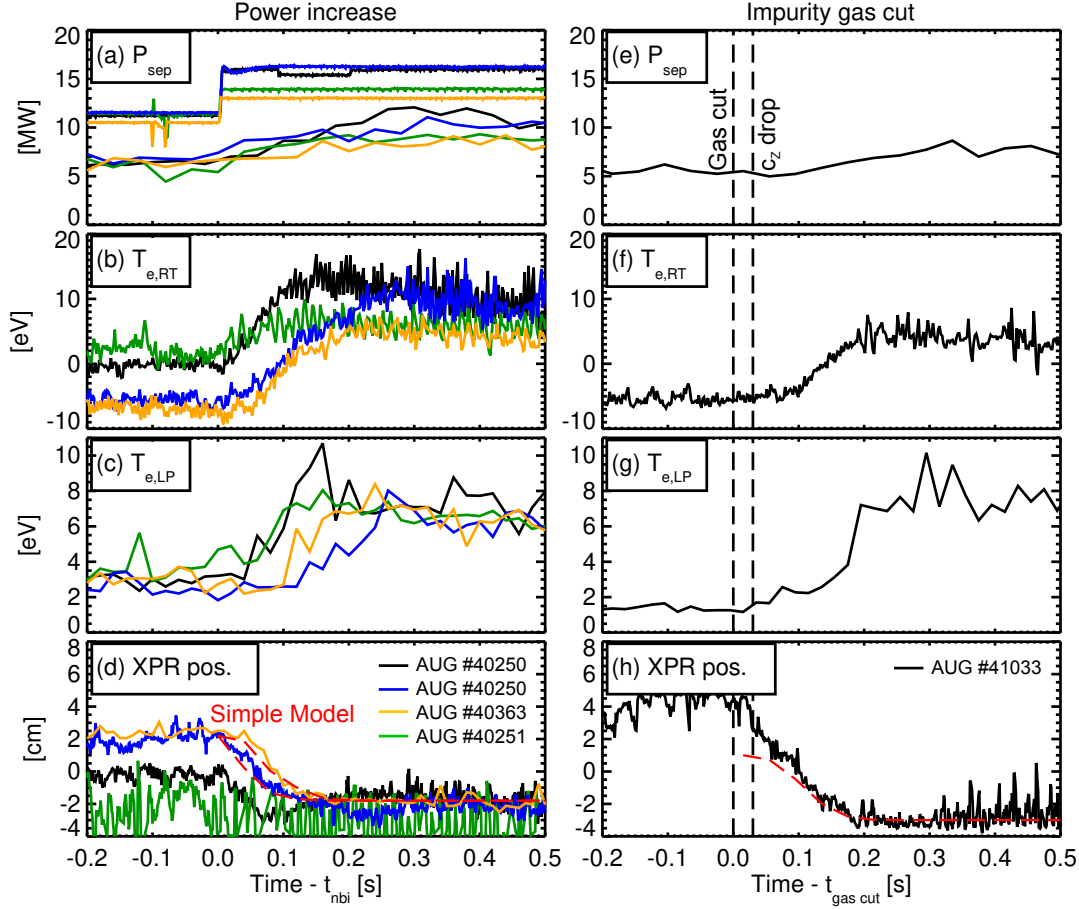

**Figure 7.** Transient response times of divertor measurements shown as a function of the time normalised to (a-d) the NBI increase and (e-h) the impurity gas cuts. An Ar+N mixture was used in AUG # 40250, #40251 and #41033, and an Ne+N mixture was used AUG #40363.

### 3. Reattachment timescales

Scenarios with increases to the NBI power and cuts to the impurity gas were run to test the transient reattachment timescales. An example of both scenarios is shown in Fig. 1 by the blue and orange traces. Note that the scenarios with NBI power increases use real-time control to set the Ar puffing rate up until the first NBI increase, after which the Ar seeding rate is fixed. The Ne and N seeding waveforms are input manually.

#### 3.1. NBI power increase

The NBI power was increased during phases with partial divertor detachment and full divertor detachment (XPR). Fig. 7a–d shows the resulting power crossing the separatrix, real-time divertor temperature, probe divertor temperature, and XPR position for the cases with  $\approx 2.5$  MW increase (orange and green lines) and  $\approx 5$  MW increase (black and blue lines) in power. The position of the localised intense radiation front above the X-point is measured by AXUV diodes [14] and is shown in Fig. 7d

to indicate the evolution of the radiation front following the power transient. In the analysis below, the XPR position is used as a proxy for the ionisation front. The partially detached divertor cases where an XPR is not present (black and green lines) show an immediate rise in temperature and take  $\approx 100$  ms to reach peak temperature. For comparison, the core confinement time in these plasmas is  $\approx 60$  ms. The fully detached divertor cases with XPR (blue and orange lines) show an immediate change in the XPR position, taking  $\approx 100$  ms before the XPR reaches a location where the radiation peak is in the inner divertor and not representing an XPR anymore. This is consistent with the temperature only showing a rise  $\approx 100$  ms after the power increase. Overall, the fully detached scenario takes  $\approx 250$  ms to reach peak temperature – significantly longer than the partially detached scenario. Since the power is kept at a higher level for a timescale longer than that required for reattachment, the peak divertor temperature reaches the steady state value expected for the associated value of  $q_{\text{det}}$ .


There are published models describing the threshold and stability of the XPR [32, 33] but these do not directly predict the location of the XPR inside the confined region. To complement these studies, a simple scalable model is proposed to predict the time required to move the ionisation front from the X-point back to the target following a change in power entering the SOL. The model assumes that the timescale is driven by the evolution of the power in time (i.e. tens or hundreds of milliseconds) coupled with the timescales of ionisation and recombination particle reservoirs (i.e. several milliseconds) and is written as follows:

$$XPR_{\text{pos}}(t) = XPR_{\text{peak}} e^{\frac{-tP_{\text{sep}}(t)}{Vn_0E_{\text{ion}}\frac{\tau_{\text{resid}}}{\tau_{\text{ionis}}}}} \quad (6)$$

The exponential form was chosen to match the evolution of the XPR position measurement following the power increase.  $V$  is the volume of neutrals extending from the target to the X-point,  $E_{\text{ion}} \approx 30$  eV is the effective ionisation energy loss for deuterium including radiative losses [34] (assuming burn-through of impurities is not significant),  $n_0$  is the average neutral atom density,  $\tau_{\text{resid}}$  is the residence time of an ion, and  $\tau_{\text{ionis}}$  is the ionisation timescale. A crude approximation is made to estimate the volume of neutrals as  $V \approx 2\pi RA_{\text{pol}} \approx 0.4 \text{ m}^3$ , where  $A_{\text{pol}} \approx 0.04 \text{ m}^2$  is the estimated poloidal area of the neutrals (see blue shaded region in Fig. 2) and  $R$  is the average radius of the neutral volume.  $n_0 \approx p_0/k_{\text{B}}T \approx 10^{21} \text{ m}^{-3}$  assuming a molecular flux at  $T = 300$  K at the baratron location. The inclusion of  $P_{\text{sep}}(t)$  means that the temporal evolution of the power rise (i.e. mainly driven by the core energy confinement time) is accounted for. A lower limit for  $\tau_{\text{resid}}$  is calculated assuming the ion velocity to be the ionic sound speed giving:

$$\frac{\tau_{\text{resid}}}{\tau_{\text{ionis}}} = \frac{L_{\parallel}n_e S_{\text{CD}}}{\sqrt{2eT_e/m_{\text{D}}}}. \quad (7)$$

$L_{\parallel} \approx 12$  m is the approximate connection length between the X-point and the target, and  $S_{\text{CD}} \approx 1 \times 10^{-16} \text{ m}^3/\text{s}$  is the hydrogenic ionisation rate coefficient at  $T_e = 2.2$  eV. Note the electron temperature effectively acts as free parameter in this model constrained by

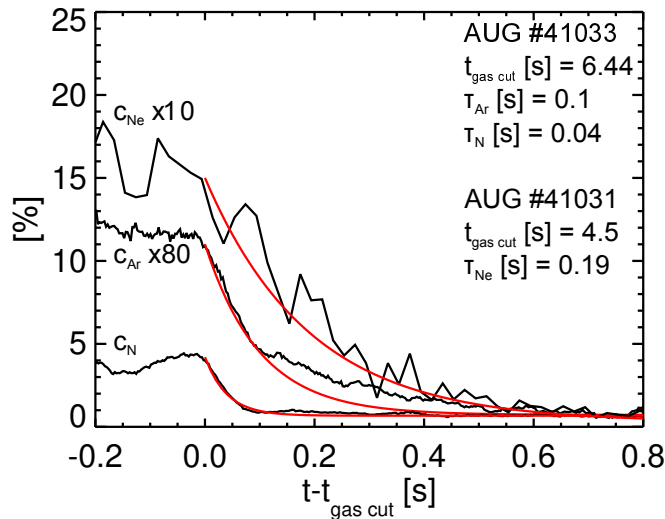

**Figure 8.** Measured divertor impurity residence times.

the assumption that the neutral atoms are likely between 1 – 3 eV. Stark broadening measurements show that  $n_e \approx 3 \times 10^{20} \text{ m}^{-3}$  which gives  $\tau_{\text{resid}}/\tau_{\text{ionis}} \approx 30$ . This ratio  $\tau_{\text{resid}}/\tau_{\text{ionis}}$  is also used by Janev and Reiter [35] to define the number of recombination cycles that a hydrogenic plasma ion can make during its residence time in the divertor.

The results of the model are shown in Fig. 7d by the red dashed lines. Considering the simplicity of the model and the large uncertainty of the values used, there is surprisingly good agreement with the measured decay time of the XPR. The advantage of this model is that it provides a simple method for scaling the reattachment time in a reactor. If  $\approx e^{-5}$  is used as an arbitrary threshold for the ionisation front having reached the target, then the time taken is

$$t = 0.09 \left( \frac{p_0}{2 \text{ Pa}} \right) \left( \frac{n_e}{3^{20} \text{ m}^{-3}} \right) \left( \frac{V}{0.4 \text{ m}^3} \right) \left( \frac{L_{\parallel}}{12 \text{ m}} \right) \left( \frac{\langle P_{\text{sep}} \rangle}{2 \text{ MW}} \right)^{-1}, \quad (8)$$

where  $\langle P_{\text{sep}} \rangle$  is the average rise in power. An interesting application of the model can be made to the JET pulse #89244 documented by Field et al. [36]. This had similar injected power of 8 MW and an XPR induced by  $\text{N}_2$ -seeding. The heating was increased to 15 MW over  $\approx 2$  seconds resulting in a  $\approx 5$  MW rise in  $P_{\text{sep}}$ . Using a simple upscaling of the above parameters to JET, namely  $V/0.4 \text{ m}^3 \approx 7$ ,  $L_{\parallel}/12 \text{ m} \approx 1.75$ , and  $\langle P_{\text{sep}} \rangle \approx 2 \text{ MW}$ , Eq. 8 predicts that the ionisation front moves back to the target within  $\approx 1$  second. While there is no measurement of the XPR position, there is a significant increase in the target Langmuir probe saturation current and N II emissivity near the target  $\approx 1$  second after the power increase (see Fig. 24 in [36]) consistent with the model prediction.

### 3.2. Impurity gas cuts

Reattachment could also be achieved by a cut of the impurity seeding instead of an increase in power. This was done by replacing the increases in NBI power in the scenario

with cuts in the impurity gas to test the reattachment timescales. As shown in Fig. 7e, cutting both impurity (Ar+N) gas flows causes  $P_{\text{sep}}$  to rise by  $\approx 3$  MW and the resulting evolution of the divertor temperature and XPR position are shown in Figs. 7f–h. There are two additional time scales to consider in this scenario: the delay between the gas valve switching off and the impurity concentration beginning to drop, and the residence time of each impurity. The former timescale is  $\approx 30$  ms indicated by the vertical dashed line in Figs. 7e–h. The impurity residence times for each impurity in Fig. 8 show that N decays fastest of the three impurities with an exponential decay rate of  $\approx 40$  ms, followed by Ar at  $\approx 100$  ms, and finally by Ne at  $\approx 200$  ms.

Overall, the divertor reaches its peak temperature at  $\approx 200$  ms after the gas cut; however, the evolution beforehand is different compared to the scenario with NBI power increase. There is no change in the real-time target temperature until 100 ms after the gas cut. This is consistent with the simple model prediction, which stays flat until 100 ms because the  $\Delta P_{\text{sep}}$  remains negligible until this point. However, the XPR position moves almost immediately. This is likely due to the shorter residence time of N and the high sensitivity of the XPR on the N concentration; however, quantifying this is difficult because overall the divertor radiation marginally increases due to the rise in  $P_{\text{sep}}$ . Therefore, even though the impurity pumping timescales cannot be included, the simple model can predict the timescales for reattachment due to changes in the power and might also be able to predict this for a larger device.

#### 4. Conclusions

This paper presents measurements indicating that the detachment threshold predictions are recovered in experiments when using reactor relevant Ne and Ar impurities. The measurements consistently show that Ar is more efficient and Ne less efficient at radiating in the SOL than the model predicts. The results indicate that, for analytical derivations of the parameters, different values of the non-coronal parameter  $n_e\tau$  for each impurity or improved atomic data may be needed to reproduce the measurements. Also the charge exchange reactions with neutrals and the FIP may have an influence on the radiation efficiency.

A higher than expected radiation efficiency results in a lower impurity concentration to reach partial detachment, which is desirable to minimise the dilution of the core fuel ions. Therefore, these results would favour Ar over Ne as a potential SOL radiator in future machines. Focus should be given to expanding the database for Ne seeding on ASDEX Upgrade using low level N puffs to keep the scenario stable. Data from other tokamaks should also be compared where possible, although this analysis relies on measurements of the divertor pressure and impurity spectroscopy.

Finally, the strongly detached X-point radiator (XPR) scenario leads to a significant time delay before the divertor reattaches following a power increase, in comparison to a partially detached divertor which reattaches on a timescale equivalent to the core energy confinement. Operating with fully detached divertors in future fusion reactors

may therefore lower the risk of a transient power increase reattaching the divertor before the control system can react. A simple model predicting the time for the ionisation front to move back to the target is shown to produce adequate agreement to measurements on ASDEX Upgrade and published data from JET.

## Acknowledgements

This work has been carried out within the framework of the EUROfusion Consortium, funded by the European Union via the Euratom Research and Training Programme (Grant Agreement No 101052200 - EUROfusion) and from the EPSRC (Grant number EP/W006839/1). The Swiss contribution to this work has been funded by the Swiss State Secretariat for Education, Research and Innovation (SERI). To obtain further information on the data and models underlying this paper please contact PublicationsManager@ukaea.uk. Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union, the European Commission, or SERI. Neither the European Union nor the European commission nor SERI can be held responsible for them.

## Appendix


### *A: Ne and Ar concentrations*

The singly ionised impurity ion typically emits in a narrow region near the outer divertor separatrix in H-mode plasmas with vertical divertor geometry [28]. In typical ASDEX Upgrade divertor geometries, this plasma region is directly influenced by the target recycling flux and provides a good proxy of the target plasma conditions. Line radiance measurements from Ne II and Ar II are therefore used to calculate the line-averaged divertor impurity concentration,  $c_Z$ , using

$$c_Z = \frac{4\pi I}{(TEC) \Delta L n_e^2}, \quad (9)$$

where  $I$  is the radiance in  $\text{ph/s/m}^2/\text{steradian}$ ,  $TEC = f_{Z+} PEC^{\text{exc}} + f_{Z2+} PEC^{\text{rec}}$  is the total emission coefficient,  $PEC^{\text{exc,rec}}$  are excitation and recombination photon emissivity coefficients in  $\text{m}^3/\text{s}$ ,  $f_Z$  is the fractional ion abundance of the ion,  $\Delta L$  is the length of the emission region through the line of sight (LOS), and  $n_e$  is the average electron density associated with  $\Delta L$ .  $\Delta L$  is set at  $\approx 5.5$  cm and  $\approx 7$  cm for Ar II and Ne II, respectively. This value is not well known, although a coarse inversion of the N II intensity measured by divertor spectroscopy suggested a value of  $\approx 4$  cm. The lengths for Ar II and Ne II are scaled to this value, based on the broadness of the TEC coefficient as a function of temperature.

For Ne II, the collisional excitation data and A-values used to calculate the excitation rate coefficients in LS resolution are taken from [37]. New level resolved excitation rate coefficients are used for Ar [31]. In ADAS notation, the year 96 and 89 data are used to calculate the ionisation balance for Ne and Ar, respectively.

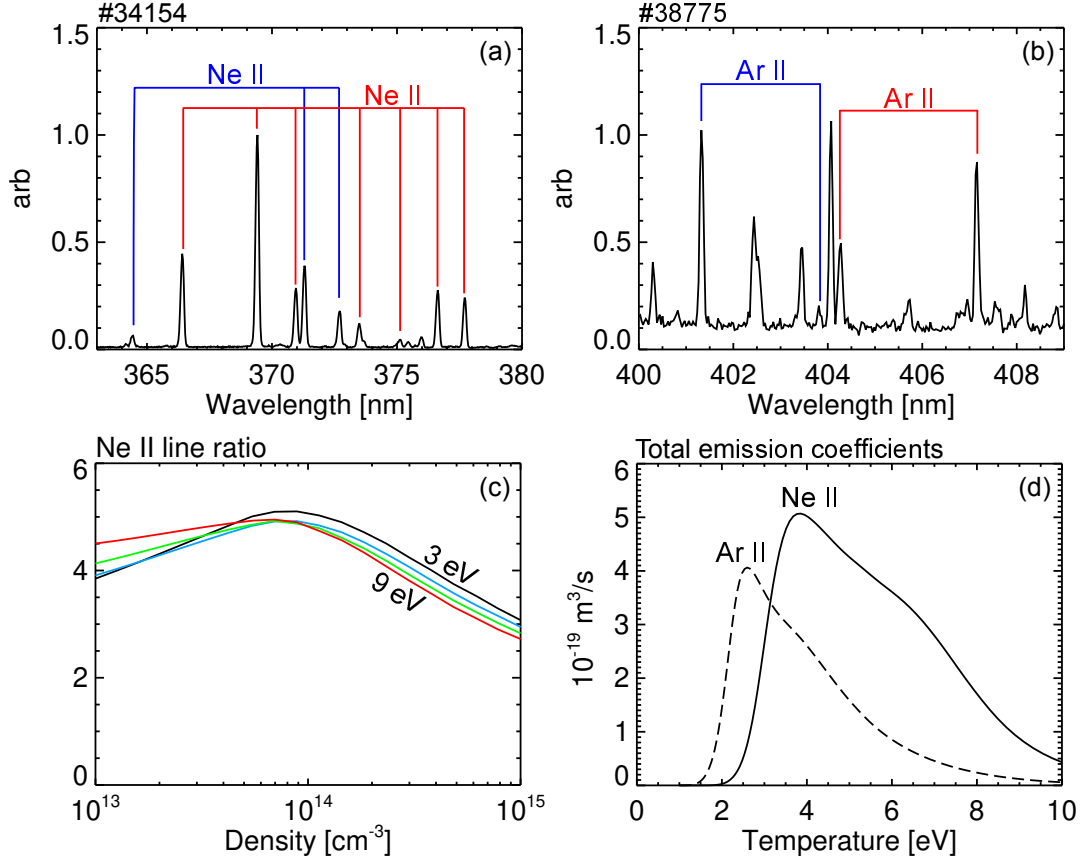

**Figure 9.** Experimental spectrum of identifying key (a) Ne II and (b) Ar II line intensities measured on ASDEX Upgrade. The modelled (c) Ne II line ratio and (d) total emission coefficients corresponding to the Ne II multiplet line ( $^4P-^4P$ ) and Ar II singlet line at 401.3 nm calculated at  $n_e = 10^{20} \text{ m}^{-3}$ .

Spectra from AUG show that there exist two intense Ne II multiplet lines in the wavelength range  $\lambda = 360 - 385 \text{ nm}$  as shown in Fig. 9a. In the same spectral region used to measure the N II lines ( $\lambda \approx 404 \text{ nm}$ ) there also exist two strong Ar II lines as shown in Fig. 9b. Although these lines belong to two separate multiplets, there is no need to measure the remaining multiplet lines as the Ar II atomic data is level resolved. The *TEC* coefficients for Ne II and Ar II are shown in Fig. 9c. Since the Ar II *TEC* is peaked at similar densities to deuterium atoms, it is reasonable to assume that the electron density measured by Stark broadening is representative of the density where the Ar II is emitting. However, for Ne II the ratios of the two multiplet lines are used to infer the electron density. This model assumes a fixed temperature of 2.6 eV and 3.7 eV, corresponding to the temperature associated with the peak *TEC* coefficient to infer the density for Ar II and Ne II, respectively. When the temperature is significantly lower than the model expectation (i.e. in deep detachment) then the model will underestimate the electron density for Ne II leading to unphysically high concentrations (i.e.  $c_Z \propto 1/n_e^2$ ). This increase is not evident for  $c_{\text{Ar}}$  because that model uses the electron density measured with Stark broadening.

## References

- [1] A. Kallenbach *et al.*, Plasma Phys. Control. Fusion **55**, 124041 (2013).
- [2] M. Wischmeier, J. Nucl. Mater. **463**, 22 (2015).
- [3] M. Wischmeier, Nucl. Fusion **55**, 063003 (2015).
- [4] M. Siccinio *et al.*, Fusion Eng. Design. **176**, 113047 (2018).
- [5] M. Bernert *et al.*, Nucl. Mater. Ener. **12**, 111 (2017).
- [6] A. Kallenbach *et al.*, Plasma Phys. Control. Fusion **58**, 045013 (2016).
- [7] R. Dux *et al.*, Nucl. Mater. Ener. **12**, 28 (2017).
- [8] A. R. Field *et al.*, Nucl. Fusion **63**, 016028 (2023).
- [9] R. A. Pitts *et al.*, Nucl. Mater. Ener. **20**, 100696 (2019).
- [10] L. Xiang *et al.*, Nucl. Fusion **61**, 076007 (2021).
- [11] S. S. Henderson *et al.*, Nucl. Mater. Ener. **28**, 101000 (2021).
- [12] S. Glögler *et al.*, Nucl. Fusion **59**, 126031 (2019).
- [13] K. Li *et al.*, Nucl. Fusion **61**, 066013 (2021).
- [14] M. Bernert *et al.*, Nucl. Fusion **61**, 024001 (2020).
- [15] A. Huber *et al.*, Phys. Scr. **2020**, 014055 (2020).
- [16] L. L. Lengyel, IPP Report-1/191 (1981).
- [17] D. Post, N. Putvinskaya, F. W. Perkins, and W. Nevins, J. Nucl. Mater. **220**, 1014 (1995).
- [18] R. J. Goldston, M. L. Reinke, and J. A. Schwartz, Plasma Phys. Control. Fusion **59**, 055015 (2017).
- [19] M. L. Reinke, Nucl. Fusion **57**, 034004 (2017).
- [20] A. Huber and A. V. Chankin, Nucl. Fusion **61**, 036049 (2021).
- [21] D. Moulton, P. C. Stangeby, X. Bonnin, and R. A. Pitts, Nucl. Fusion **61**, 046029 (2021).
- [22] A. E. Jarvinen *et al.*, Nucl. Mater. Ener. **34**, 101378 (2023).
- [23] A. Kallenbach *et al.*, Nucl. Fusion **55**, 053026 (2015).
- [24] P. David *et al.*, Nucl. Fusion **61**, 066025 (2021).
- [25] A. Kallenbach *et al.*, Plasma Phys. Control. Fusion **60**, 045006 (2018).
- [26] D. Brida *et al.*, Plasma Phys. Control. Fusion **62**, 105014 (2020).
- [27] B. Lomanowski *et al.*, Nucl. Fusion **62**, 066030 (2022).
- [28] S. S. Henderson *et al.*, Nucl. Fusion **58**, 016047 (2017).
- [29] S. S. Henderson *et al.*, Nucl. Mater. Ener. **18**, 147 (2019).
- [30] A. Kramida, Y. Ralchenko, and J. Reader, National Institute of Standards and Technology (NIST) Atomic Spectra Database (ver. 5.10), 2022.
- [31] M. Bluteau, Ph.D. thesis, University of Strathclyde, 2019.
- [32] I. H. Hutchinson, Nucl. Fusion **34**, 1337 (1994).
- [33] U. Stroth *et al.*, Nucl. Fusion **62**, 076008 (2022).
- [34] K. Verhaegh *et al.*, Nucl. Fusion **59**, 126038 (2019).
- [35] R. K. Janev and D. Reiter, Report nr. jül-4411, Forschungszentrum Jülich (unpublished).
- [36] A. R. Field *et al.*, Plasma Phys. Control. Fusion **59**, 095003 (2017).
- [37] D. C. Griffin, D. M. Mitnik, and N. R. Badnell, J. Phys. B: At. Mol. Opt. Phys. **34**, 4401 (2001).