

UKAEA-CCFE-PR(23)132

K. Verhaegh, B. Lipschultz, J.R. Harrison, F. Federici,
D. Moulton, N. Lonigro, M. O'Mullane, N. Osborne, P.
Ryan, T. Wijkamp, B. Kool, C. Theiler, A. Thornton

The role of plasma-atom and molecule interactions on power & particle balance during detachment on the MAST Upgrade Super-X divertor

Enquiries about copyright and reproduction should in the first instance be addressed to the UKAEA Publications Officer, Culham Science Centre, Building K1/O/83 Abingdon, Oxfordshire, OX14 3DB, UK. The United Kingdom Atomic Energy Authority is the copyright holder.

The contents of this document and all other UKAEA Preprints, Reports and Conference Papers are available to view online free at scientific-publications.ukaea.uk/

The role of plasma-atom and molecule interactions on power & particle balance during detachment on the MAST Upgrade Super-X divertor

K. Verhaegh, B. Lipschultz, J.R. Harrison, F. Federici, D. Moulton,
N. Lonigro, M. O'Mullane, N. Osborne, P. Ryan, T. Wijkamp, B.
Kool, C. Theiler, A. Thornton

The role of plasma-atom and molecule interactions on power & particle balance during detachment on the MAST Upgrade Super-X divertor

K. Verhaegh¹, B. Lipschultz², J.R. Harrison¹, F. Federici², D. Moulton¹, N. Lonigro^{2,1}, M. O'Mullane^{3,1}, N. Osborne⁴, P. Ryan¹, T. Wijkamp^{5,6}, B. Kool^{6,5}, E. Rose¹, C. Theiler⁷, A. Thornton¹ and the MAST Upgrade team*

¹ United Kingdom Atomic Energy Agency, Culham, United Kingdom

² York Plasma Institute, University of York, United Kingdom

³ University of Strathclyde, Glasgow, United Kingdom

⁴ University of Liverpool, Liverpool, United Kingdom

⁵ Eindhoven University of Technology, Eindhoven, The Netherlands

⁶ DIFFER, Eindhoven, The Netherlands

⁷ Swiss Plasma Centre, École Polytechnique Fédérale de Lausanne, Lausanne, Switzerland

* See author list of “J. Harrison et al 2019 Nucl. Fusion 59 112011

(<https://doi.org/10.1088/1741-4326/ab121c>)

E-mail: kevin.verhaegh@ukaea.uk

Abstract. This paper shows first quantitative analysis of the detachment processes in the MAST Upgrade Super-X divertor. We identify an unprecedented impact of plasma-molecular interactions involving molecular ions (likely D_2^+), resulting in strong ion sinks, leading to a reduction of ion target flux. This starts to occur as the ionisation source detaches from the target, followed by a build-up of molecules below the ionisation source which get excited, resulting in Molecular Activated Recombination (MAR) and Dissociation (MAD). MAR ion sinks exceed the ion sources before electron-ion recombination (EIR) starts to occur. The total ion sink strength demonstrates the capability for particle exhaust in the Super-X Configuration. We find that MAD is the dominant volumetric neutral atom creation mechanism and results in significant power losses. Electron-impact excitation preceding ionisation and, in deeper detached conditions, MAD are the dominant power loss mechanisms in the divertor chamber. As the plasma becomes more deeply detached, EIR starts to occur and electron temperatures below 0.2 eV are achieved. Even at such low electron temperature conditions, MAR is observed to be an important ion sink mechanism, which suggests the presence of highly vibrationally excited molecules in the cold detached regime. The measured total radiative power losses *in the divertor chamber* are consistent with hydrogenic radiative power losses, inferred using hydrogen emission analysis. This suggests that intrinsic divertor impurity radiation, despite the carbon walls, is minor in the divertor chamber. The above observations are general and apply to Ohmic L-mode, ELM-free H-mode and type I ELMy H-mode discharges.

Keywords: MAST Upgrade; Super-X divertor; Plasma spectroscopy; Plasma detachment;

Plasma-molecular interactions

1. Introduction

The successful development of fusion energy faces a significant obstacle in the challenge of divertor power exhaust, as the heat flux directed at the target must be significantly reduced to meet engineering limits [1, 2]. To accomplish this reduction, plasma detachment is required, which occurs when plasma-neutral interactions result in simultaneous power, momentum, and particle losses, effectively decreasing the ion target flux [3, 4, 5, 6]. Detachment occurs when the divertor target plasma temperature is reduced to below approximately 5 eV, which can be achieved by increasing the core density or introducing extrinsic impurity seeding to induce radiative power losses (a necessary requirement for reactors).

Alternative divertor configurations (ADCs) are being developed that are predicted to tackle the power exhaust challenge by leveraging variations in divertor magnetic topology and enhanced neutral baffling. This may serve as a risk mitigation strategy if conventional divertors in reactors cannot withstand the power exhaust challenge. One example of an ADC is the tightly baffled Super-X divertor, used by the novel MAST Upgrade tokamak. With the Super-X, the strike point is shifted to a larger major radius, leading to a larger gradient in the magnetic field along the flux tubes to the target, which reduces the heat flux and plasma temperature and makes plasma detachment more accessible [7, 8, 9, 10].

1.1. Detachment physics

Particle balance (equation 1) implies that the integrated ion target flux (I_t in ions/s) is equal to the divertor ion source (I_i) minus the divertor ion sinks (I_r) plus any net influx from ions outside of the divertor towards the target (I_u). Generally, the divertor ion target flux is much higher than any flow of ions from upstream ($I_t \gg I_u$), which implies that the divertor ion source dominates any upstream flows ($I_i \gg I_u$) ‡. In these conditions, the divertor is in 'high recycling' conditions and the 'closed box' approximation ($I_t \approx I_i - I_r$) is valid.

$$I_t = I_i - I_r + I_u \quad (1)$$

Since it takes E_{ion} of energy to ionise hydrogen, power and particle balance are intertwined. The power flux entering the recycling region (q_{recl}) is linked to the plasma heat flux reaching the target ($I_t(\gamma T_t + \epsilon)$ - where γ is the sheath transmission factor and T_t is the target temperature). Under the closed box approximation, this leads to the ion target flux estimate provided by equation 2. This means that reducing the ion target flux (if $T_t \ll \frac{E_{ion}}{\gamma} \sim 4 - 6eV$) requires either ion sinks (I_r) and/or a reduction of $\frac{q_{recl}}{E_{ion}}$.

‡ However, this is not necessarily the case for the MAST Upgrade Super-X divertor as will be shown in this work (figure 5)

The latter leads to power limitation [11] (or "starvation" [4, 12]) of the ionisation source, which can be achieved by reducing q_{recl} through impurity seeding.

$$I_t = \left(\frac{q_{recl}}{E_{ion}} - I_r \right) \times \frac{1}{1 + \frac{\gamma T_t}{E_{ion}}} \quad (2)$$

However, due to the marginal Bohm criterion at the plasma sheath ($\Gamma_t \propto p_t / \sqrt{T_t}$) §, any reduction of the ion target flux requires the target pressure (p_t) to drop faster than the square root of the target temperature ($\sqrt{T_t}$). Such target pressure losses can be brought on by either upstream pressure losses [6, 13], which are undesirable for a reactor but sometimes observed experimentally [11, 14]; or volumetric momentum losses [5, 15] which reduce the pressure before reaching the target. Taking the marginal Bohm criterion and momentum balance into account, the ion target flux can be modelled using equation 3.

$$I_t = \frac{\gamma p_t^2}{2m_i q_{recl}} \frac{\frac{\gamma T_t}{E_{ion}}}{1 + \frac{\gamma T_t}{E_{ion}}} \quad (3)$$

Although equations 3 and 2 are different approaches (e.g. one focuses on momentum balance, whereas the other focuses upon power/particle balance), it has been shown that both formulations are equivalent [16]. Any reactor-relevant detached solution will require simultaneous power, momentum and particle losses.

1.2. Plasma detachment and spectroscopy

Plasma detachment is often studied by observing the effects of detachment on various parameters, such as reduced heat flux to the target, decreased ion target flux, and increased radiative losses. However, this study aims to explain the microscopic origin of these macroscopic results by examining plasma-atom/molecular interactions. In the 1990s, research showed that electron-ion recombination can be a crucial ion sink during detachment under certain conditions [17, 18, 4, 19]. This could explain the ion target flux roll-over in some, but not all, cases, which led to the suspicion that the ion target flux reduction may be due to a decrease in the ionisation source, caused by power limitation. Here, the heat flux entering the recycling region becomes comparable to the power flux required for ionisation [20, 12, 11, 21]. Later research confirmed the reduction of the ionisation source during detachment on JET [22] & TCV [11]. TCV results showed that the reduction of the divertor ionisation source was indeed correlated to power limitation [11].

However, this purely atomic analysis [22, 11, 16] could not explain all spectroscopic observations, particularly the brightness of the $D\alpha$ emission. Further research on JET [23], TCV [24, 25, 3] and MAST-U [10] revealed that this emission arises from excited atoms born from plasma-molecular interactions involving molecular ions (D_2^+ and/or

§ The Bohm criteria applies to a single flux tube, but for simplicity below we will apply it to the integrated ion target flux profile

$D_2^- \rightarrow D^- + D$). When those ions react with the plasma, they result in additional hydrogenic emission & power losses (hydrogenic radiation, potential energy losses), ion sources (Molecular Activated Ionisation - MAI), ion sinks (Molecular Activated Recombination - MAR), and neutral atom sources (Molecular Activated Dissociation - MAD). Analysis has shown that these interactions can lead to strong ion sinks that are more significant than electron-ion recombination on TCV and play a crucial role in the ion target flux reduction [25, 3]. This increased the total ion sink significantly compared to older studies that did not include plasma-molecular interactions [11]. With the increase in the total ion sink, the ion target flux was significantly larger than the divertor ion sources minus divertor ion sinks during deep detachment [3]. This suggests the ion flow from outside the divertor towards the target is significant during deep detachment and high recycling conditions stop applying. This is in agreement with SOLPS-ITER modelling predictions [11, 26] as well as data from a novel divertor scanning reciprocating probe [27].

The finding that plasma-molecular chemistry plays a major role during detachment on TCV was inconsistent with plasma-edge simulations, which showed negligible amounts of molecular activated recombination and dissociation from molecular ions and associated $D\alpha$ emission, as well as a lack of ion target flux roll-over during detachment [3, 26, 28]. This was attributed to the treatment of molecular charge exchange in Eirene, which was underestimated, particularly for deuterium and tritium [3, 29, 30, 13, 29]. Increasing the molecular charge exchange cross-section by disabling ion isotope mass re-scaling, both through post-processing the TCV SOLPS-ITER simulations [3], as well as self-consistent SOLPS-ITER simulations [31, 29], led to an improved match between the experiment and simulation.

1.3. Detachment in the MAST Upgrade Super-X divertor

The results from the first MAST Upgrade campaign indicate both reduced target heat fluxes as well as a reduced detachment onset that is roughly consistent with analytic predictions and simulations [9, 10, 7, 32]. Divertor spectroscopy analysis of density ramp discharges in the Super-X divertor configuration was performed to separate the $D\alpha$ emission in terms of its different atomic and molecular processes. This indicated that, in a fuelling scan, detachment starts with the electron-impact excitation emission detaching from the target [10, 33]. This results in a region with a high molecular density below the ionisation region. Collisions, reactions and plasma-wall interactions can excite molecules vibrationally, which facilitates the creation of molecular ions (e.g. D_2^+ and/or $D_2^- \rightarrow D^- + D$). Those ions react with the plasma, leading to strong hydrogen Balmer line emission from the resultant excited neutral atoms [10, 33]. These observations are qualitatively consistent with previous TCV observations [3, 24], although plasma-molecular effects have a stronger impact on the hydrogenic emission in MAST-U.

Detachment in the Super-X can be distinguished in four phases [10, 33], which are listed below and illustrated schematically in figure 1, adopted from [10].

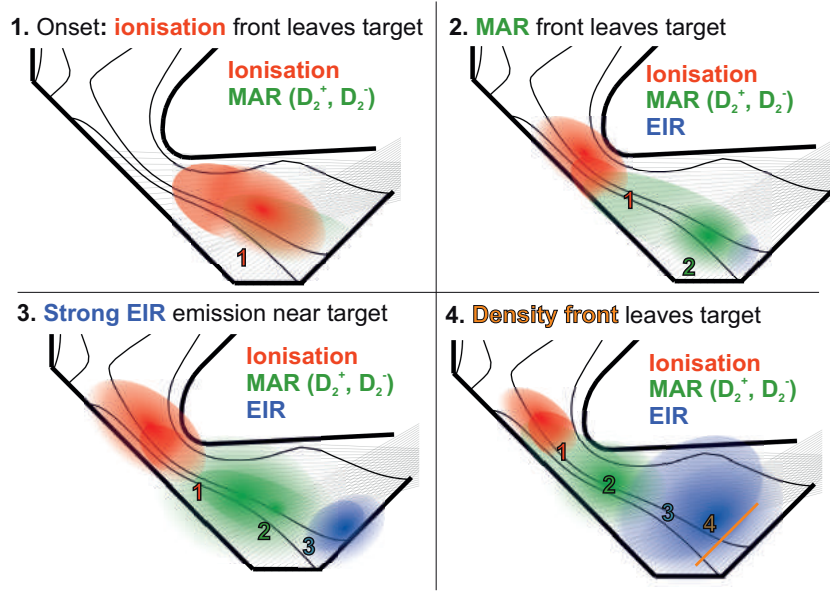


Figure 1. Schematic overview of the four inferred MAST-U Super-X detachment phases in terms of the reactions occurring in the divertor. Also shown is the Super-X plasma geometry and the DMS spectroscopic viewing chords. The numbers shown indicate: (1) the back-end of the ionisation region; (2) the back-end of the Molecular Activated Recombination (MAR) region; (3) the front-end of the Electron Ion Recombination (EIR) region; and (4) the back-end of the electron ion recombination / density region. The magnetic geometry in this illustration has been obtained from a SOLPS-ITER simulation (from [34]). Adopted from [10].

- (i) The ionisation region detaches from the target. Downstream this region, strong Balmer emission from plasma-molecular interactions extends to the target.
- (ii) The peak in Balmer line emission from plasma-molecular interactions detaches from the target as the divertor temperature drops below 1 eV and the efficiency of creating molecular ions is reduced.
- (iii) Signs of electron-ion recombination (EIR) start to appear, resulting in an increase of the higher/lower -n Balmer line ratio towards the EIR limit as well as high-n ($n \geq 9$) Balmer line emission. Temperature estimates of ≤ 0.2 eV are found.
- (iv) The peak in EIR emission detaches from the target, which is consistent with a strong reduction of the electron density near the target [10].

1.4. This paper

Building on the qualitative work in [10], in this work we present a first quantitative analysis of the divertor ion sources & sinks in the novel MAST-U Super-X divertor. This was enabled using new ADAS data [35] for EIR which has been extended to go below 0.2 eV. Our results indicate a strong or dominant presence of MAR ion sinks in the entire divertor chamber from detachment phase I until phase IV. In the deepest detached phases, where EIR ion sinks are significant and $T_e < 0.2$ eV is reached, MAR

ion sinks remain important; which is suggestive of transport of vibrationally excited molecules. The ion sinks are significantly stronger than the divertor ion source for the majority of the detached regime, which has implications for the plasma flow profile. Deep detachment states where ion sinks in the divertor chamber are similar or larger than the divertor ion source are found both during Ohmic L-mode as well as ELM-free and type-I ELMy Ohmic H-mode operation.

Extrapolating our Balmer line analysis to the total hydrogenic radiative losses and comparing this with the total radiation suggests that the total radiative power in the divertor is dominated by atomic hydrogenic radiation. Hydrogenic power losses can remain significant even when the ionisation source has moved upstream out of the divertor chamber due to power losses associated with plasma-molecular interactions, particularly MAD which is the dominant volumetric neutral atom generation process in the plasma.

2. MAST-U overview

In this work we will discuss results from Ohmic Super-X Double Null diverted plasmas in L-mode (# 45371, $I_p = 650$ kA, $P_{SOL} = 470$ kW, $dr_{sep} = 1$ mm) in section 3 and H-mode (# 45121, $I_p = 750$ kA, $P_{SOL} = 470$ kW, $dr_{sep} = 1$ mm) in section 4. Results from a deeply detached L-mode discharge (# 45370, $I_p = 450$ kA, $P_{SOL} = 430$ kW, $dr_{sep} = 2$ mm) are used in section 5.1. The magnetic geometries are shown in figure 2, together with the spectroscopic coverage of the Divertor Monitoring Spectrometer (DMS) [10]. Key parameters during the discharge, including core density, $D\alpha$ photomultiplier tube measurements, fuelling and the ion target flux \parallel as well as spectroscopically inferred detachment phases are shown in figure 3. # 45371 is fuelled from the lower divertor chamber, whereas # 45370 & # 45121 are fuelled from the high-field side, main chamber. # 45371 utilises a cut in the fuelling near the end of the discharge to monitor the divertor response to a lack of fuelling in deep detached conditions. # 45121 enters ELM-free H-mode at $t = 0.24$ s and transitions to ELMy H-mode at $t = 0.46$ s as the fuelling is reduced. All three discharges are already detached when the Super-X configuration is formed.

Measurements of the lower divertor Divertor Monitoring Spectrometer (DMS) are used for # 45371 and # 45121 to infer quantitative information about the power and particle sinks & sources, using BaSPMI [25] analysis on the measured $D\alpha$, $n = 5$ and $n = 6$ Balmer line brightnesses. The $n = 6$ Balmer line has been used to estimate the electron density through Stark broadening and a large uncertainty ($> 3 \times 10^{19} m^{-3}$) has been assigned to this due to the relatively low spectral resolution (0.09 nm). The

\parallel The ion target flux magnitudes have large uncertainties, since 1) only a part of the profile is measured due to a lack of coverage in most cases; 2) strike point splitting in # 45371 and # 45121 causes toroidal asymmetries. Therefore, the indicated uncertainties apply to the relative trends of the ion target flux measurements, which are more reliable than their magnitudes ($\times \sim 2 - 3$ uncertainty, based on up/down asymmetries in expected up/down symmetric conditions when one divertor only has partial Langmuir probe coverage).

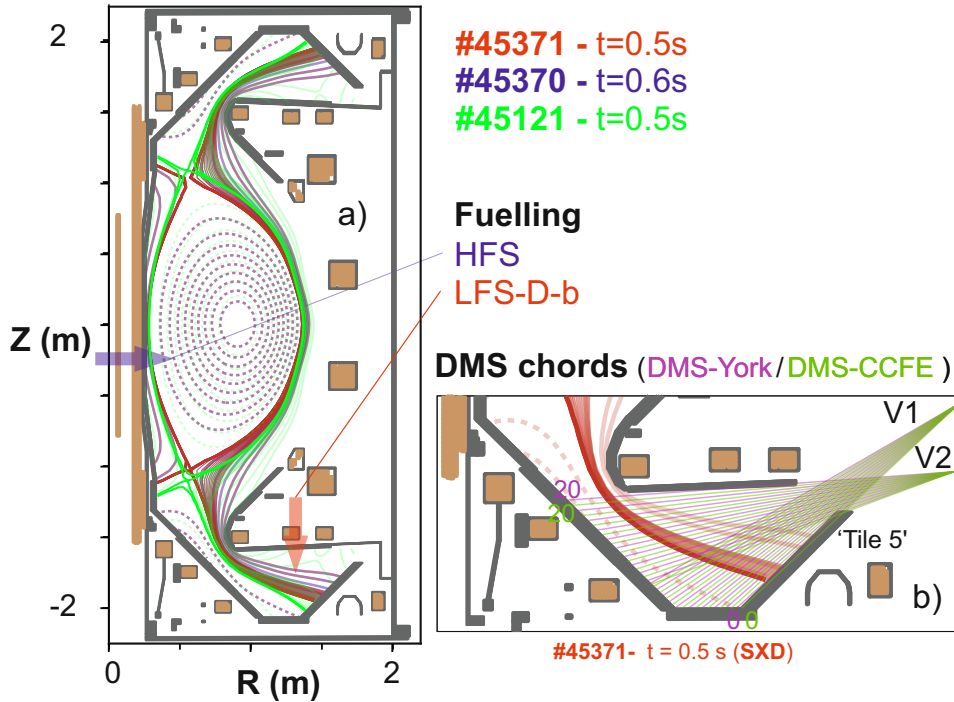


Figure 2. a) The magnetic geometries corresponding to three discharges # 45371 (red) at 500 ms and # 45370 (blue) at 500 ms and # 45121 (green) at 500 ms, are shown together with the vessel geometry, poloidal field magnets and the fuelling valve locations utilised ('HFS' and 'LFS-D-b'). b) Just the lower divertor region is shown along with the DMS spectroscopic chordal lines-of-sight originating from view points V1 and V2, which are both coupled to two spectrometers ('DMS-York' and 'DMS-CCFE'). In both a) and b), the Super-X separatrix strike point is incident on 'Tile 5'.

D_2 Fulcher band brightness has been used as a temperature constraint [10]. For this calculation, a fully Bayesian version of BaSPMI was used [10]. For more information on the BaSPMI implementation, see Appendix A.

3. Results from an L-mode Super-X ohmic fuelling ramp scan (# 45371)

3.1. Evolution of ion sources and sinks and particle balance in the Super-X divertor

Figure 4 displays the quantitative ion source and sink profiles inferred using BaSPMI for # 45371 at four different time points, corresponding to detachment phases I-IV (figure 1). The inferred ionisation source indicates that the ionisation region moves upstream as the divertor fuelling is increased and is detached from the target after the Super-X formation. According to the ion source/sink inferences (figure 4), Molecular Activated Recombination (MAR) is present throughout the divertor chamber but is particularly concentrated below the ionisation region. As the divertor fuelling increases, the MAR ion sink strength initially rises, ultimately moving upstream as the MAR front detaches from the target (detachment phase II).

The point where the MAR ion sink exceeds the ionisation source follows the

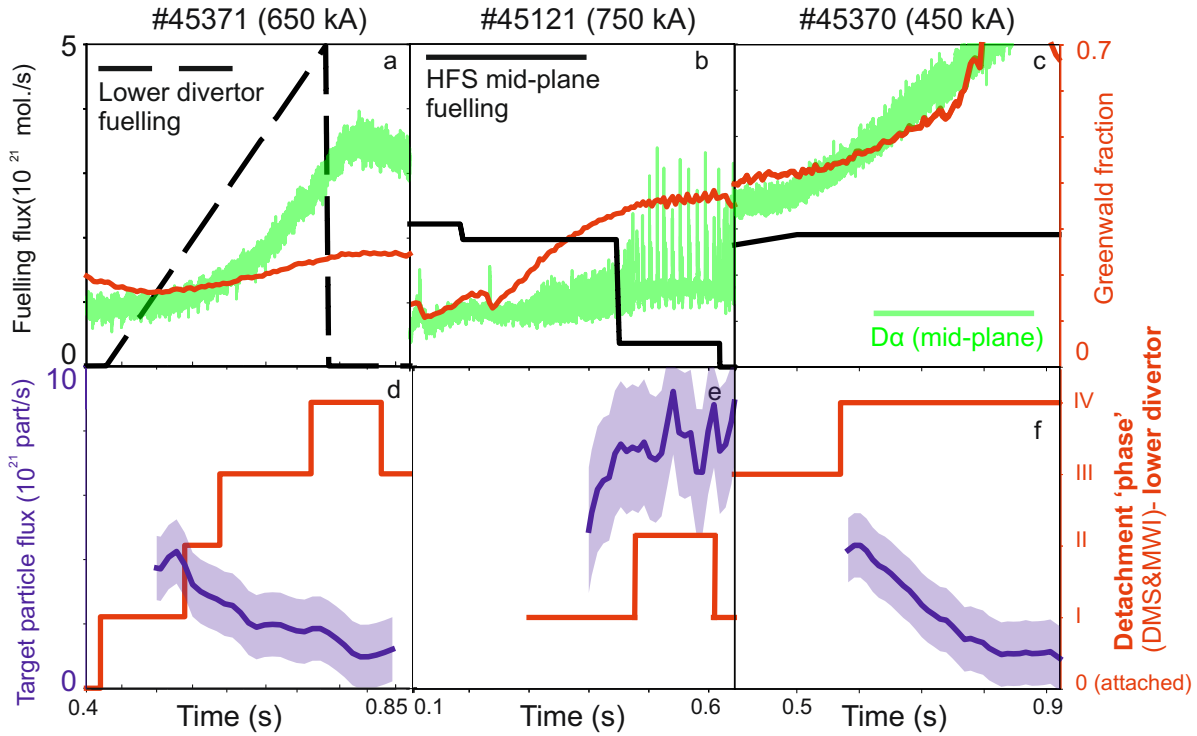


Figure 3. Overview traces of discharges used in this paper of the core density (in terms of Greenwald fraction), core $D\alpha$ signal, ion target flux (lower outer target) and detachment phase (inferred spectroscopically with line-of-sight spectroscopy - DMS [10] and imaging - MWI [33]) # 45371 (Ohmic L-mode density ramp $I_p = 650$ kA), # 45121 (Ohmic H-mode discharge, $I_p = 750$ kA), # 45370 (deeply detached Ohmic L-mode density ramp $I_p = 450$ kA).

movement of the ionisation region upstream. These quantitative results establish a clear spatial transition between an ionisation-dominated region and a recombination-dominated region (e.g., MAR), which commences during detachment phase I and moves upstream as detachment deepens. This cross-over point between recombining and ionising plasma, is observed to be correlated with the Fulcher emission region and is expected to impact the plasma flow profile (section 5.2).

Detachment phase III marks the onset of electron-ion recombination, which becomes significant in detachment phase IV when it detaches from the target. This indicates a shift in the electron density bulk away from the target, as reported in [10]. While the peak in the MAR ion sink moves upstream off the target in detachment phase II, significant MAR persists in the region below its peak, even in the presence of strong EIR. Temperature estimates based on EIR emission data suggest electron temperatures below or around 0.2 eV, according to several analyses including new ADAS data for $T_e < 0.2$ eV (see section 5.1). At such low temperatures, strong MAR ion sinks would not be expected according to the molecular charge exchange cross-sections used by EIRENE [10, 29], suggesting inaccuracies in these rates at low temperatures (see section 5.4).

Integrating the ion source/sink profiles in the divertor volumetrically, we can estimate

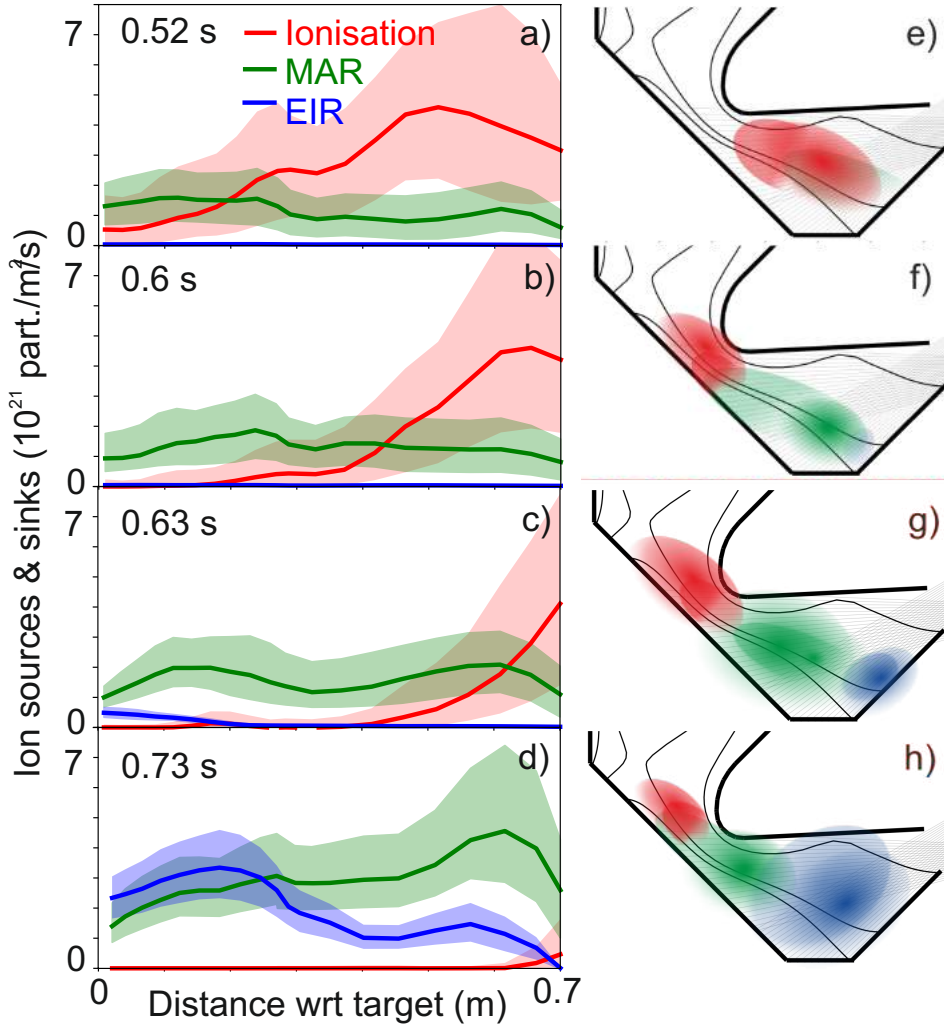


Figure 4. Ion source & sink profiles for # 45371 (a-d), inferred by BaSPMI, at four different time points in the Super-X divertor, indicative of the evolution of the four different phases of detachment illustrated in figure 1. (e-h) Schematic overview of divertor ion sources/sinks adopted from figure 1.

the total ion sources/sinks (ions/s) below the baffle entrance in the lower divertor chamber (figure 5). As detachment progresses, the total ion source reduces and the MAR ion sink increases. This coincides with the movement of the ionisation source further upstream into the divertor entrance (beyond the DMS viewing region), as depicted in Figure 4. In detachment phase II and beyond, the MAR ion sinks start to exceed the ionisation source. Despite this, there is still a detectable amount of ion target flux reaching the outer target. This suggests a loss of 'high recycling' conditions ($I_t \approx I_i - I_r$) as I_u is significant (equation 1). This is consistent with the observation that the ionisation region moves outside of the monitored region (i.e. it moves upstream of the baffle entrance). This leads to an escape of neutrals outside the monitored region (upstream of baffle entrance) that become ionised and flow back towards the target.

Since 40 % of the poloidal leg length from the X-point to the target is outside the

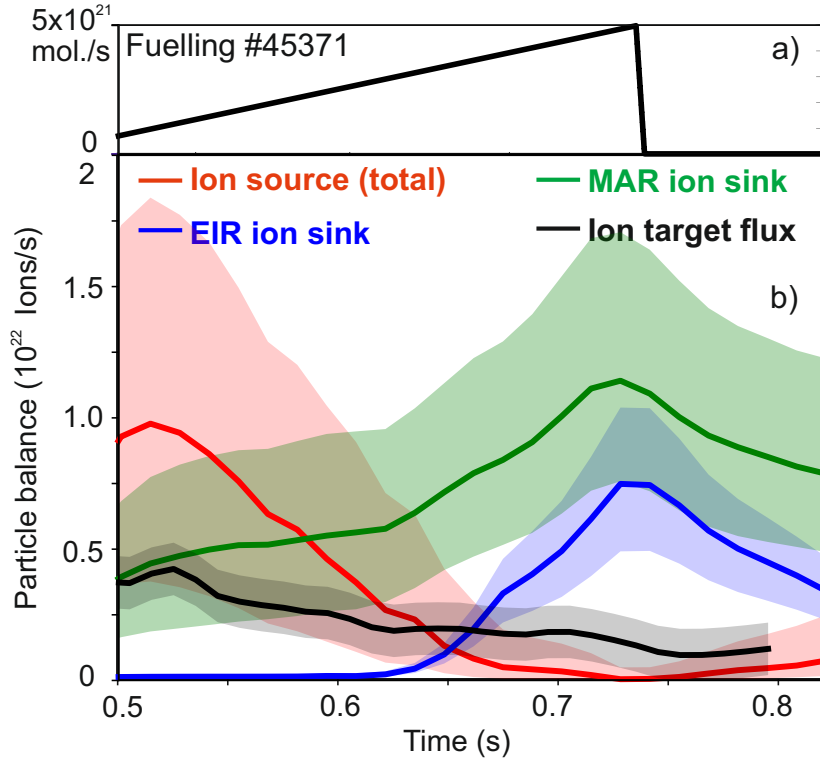


Figure 5. Particle balance for # 45371 in the Super-X divertor. a) fuelling reference trace; b) integrated ion sources & sink profiles (figure 4) in the lower divertor compared with the ion target flux measured by Langmuir probes.

monitored region (i.e. the X-point is significantly more upstream than the baffle entrance), it is uncertain whether I_u arises from neutrals being ionised in between the baffle entrance and the X-point, or whether they get ionised upstream of the X-point. However, we do not observe a strong increase of the hydrogenic emission near the mid-plane in # 45371 (in contrast to the more detached discharge # 45370), which suggests that the neutral leakage to the mid-plane scrape-off-layer is limited. Nevertheless, additional diagnostic coverage of the baffle throat region is required to investigate the upstream ionisation further and a secondary multi-wavelength imaging system for the X-point is in development.

3.2. Hydrogenic power losses in the Super-X divertor and molecular dissociation

Our spectroscopic analysis provides an estimate of the power losses due to hydrogenic processes in the plasma. In figure 6, we present the atomic hydrogenic radiation profiles, which include the inferred radiation losses from all excited hydrogen atoms, generated either by exciting neutral atoms or breaking down molecules. We exclude the radiative losses from excited molecules themselves, such as the Werner and Lyman bands [36, 37]. Since this discharge was fuelled from the lower divertor chamber, the hydrogenic radiative losses are likely not symmetric between both divertors (e.g. it is observed that the lower divertor detaches before the upper divertor when only the lower divertor is fuelled).

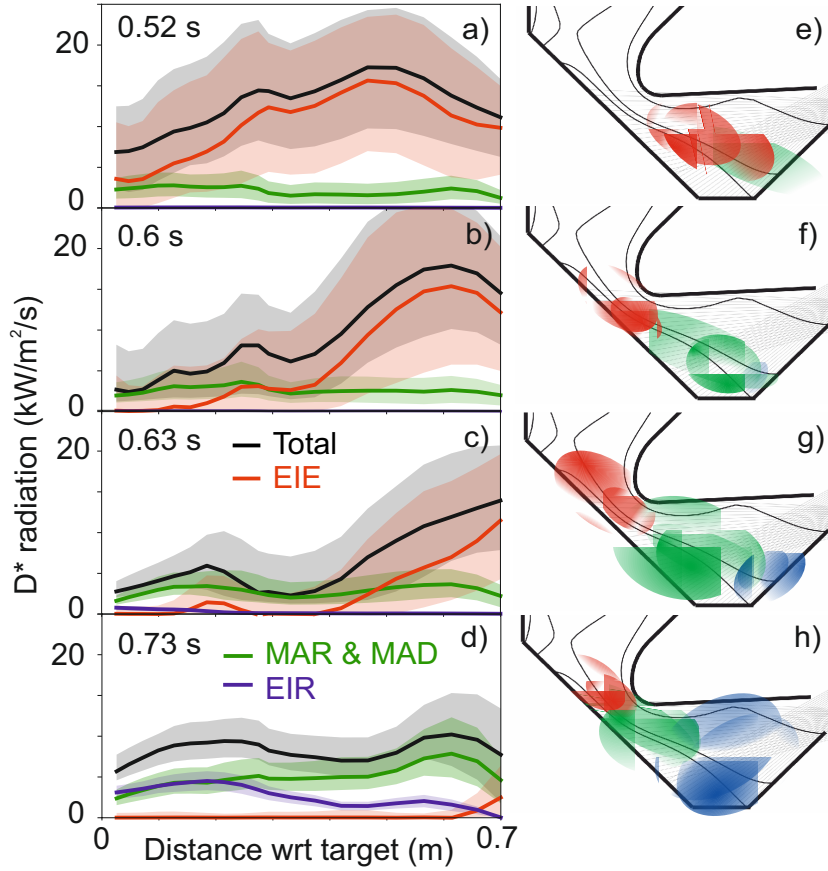


Figure 6. Hydrogenic radiative loss profiles in the Super-X divertor at four different time points for # 45371 (a-d), indicative of the evolution of the four different phases of detachment illustrated in figure 1. (e-h) Schematic overview of divertor ion sources/sinks adopted from figure 1.

Our findings, as shown in figure 6, demonstrate a clear upstream movement of the electron-impact excitation (EIE) radiation region, consistent with the observed movement of the ionisation source (figure 4). Hydrogenic radiation from plasma-molecular interactions is distributed throughout the divertor. Hence, we expect the total hydrogenic radiative losses to peak near the ionisation region and move upstream with the ionisation source. As the ionisation source and hydrogenic radiative losses move out of the divertor chamber, the imaging X-point bolometry system - the IRVB [38] - detects an increase in the total radiative losses above the baffle opening. This suggests a correlation between the total and hydrogenic radiation.

By integrating the profiles of hydrogenic radiative loss in the lower divertor chamber, we can estimate the total hydrogenic radiative losses and their various contributors (as shown in Figure 7). Although EIE radiative losses dominate the radiation profile, the total MAR & MAD hydrogenic radiative losses can still be significant, forming a dominant contribution to the total hydrogenic power loss after the ionisation source moves upstream of the divertor chamber (during detachment phase II-III, $t > 0.625$ s). During the deepest states of detachment (detachment phase IV), radiative power losses

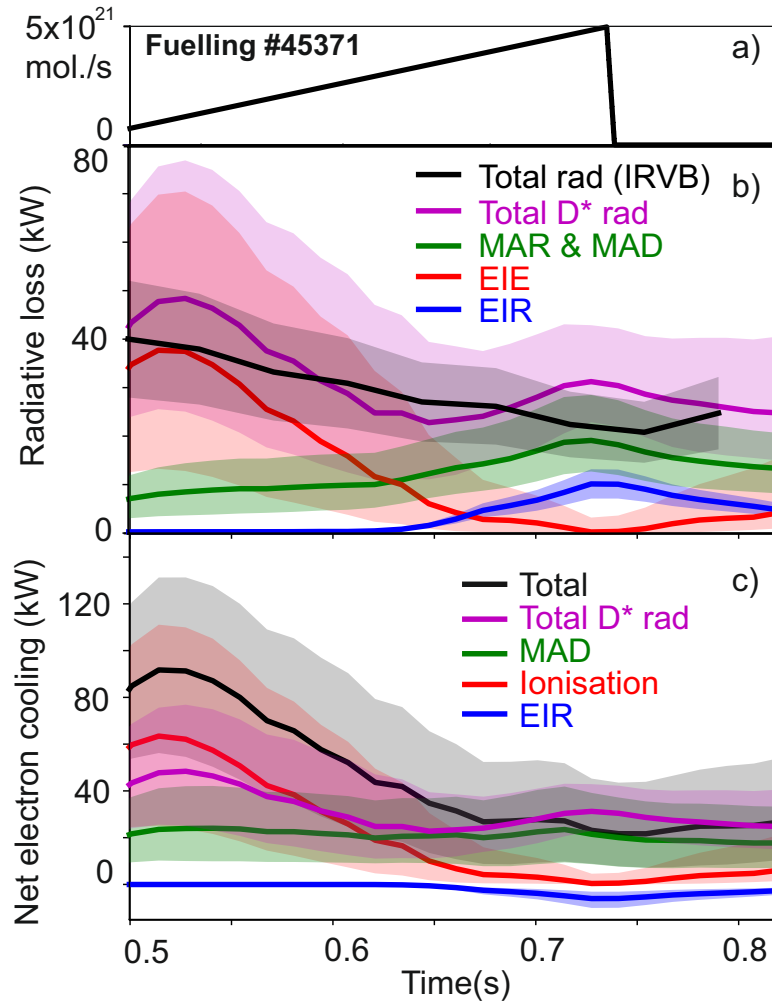


Figure 7. Power losses integrated over the lower divertor chamber. a) Reference fuelling profile; b) integrated hydrogenic radiative losses based on the inferred radiative losses from BaSPMI (figure 6) compared against total radiative power losses in the divertor chamber measured by the IRVB (black) c) net electron cooling power (radiative losses as well as energy gains associated with potential energy gains & losses).

associated with EIR may become non-negligible.

Although the IRVB cannot reconstruct the 2D radiative emissivity profile in the divertor chamber, it can provide an estimate of the integrated radiation in the divertor chamber below the baffle entrance [38]. The IRVB facilitates a direct comparison against the divertor chamber integrated hydrogenic (DMS analysis) radiative losses (figure 7). Both results are in agreement within the substantial uncertainties. This suggests the dominant part, if not all, of the *divertor chamber* radiative losses arise from hydrogenic radiative losses, which is consistent with interpretative SOLPS-ITER simulations [9].

In addition to radiative power losses, reactions in a plasma can result in potential energy losses or gains to the electrons. The electron cooling power from plasma-neutral interactions can thus be different from the radiative losses arising from this. However, these reactions may not necessarily lead to a loss of power deposition on the target. For

instance, while it takes 13.6 eV to ionise a neutral atom into an ion, the same amount of energy is released back to the target when the ion reaches it. Therefore, there is no net power dissipation unless the ion recombines before reaching the target (e.g., through volumetric recombination - MAR and EIR). This underscores the importance of ion sinks or limiting the ion source through power limitation in optimising the power dissipation potential of a detached plasma (see section 1).

Considering these factors, the total *net* electron cooling power due to hydrogenic processes is depicted in figure 7c. During detachment phases I-II, the net electron cooling power is 50-100% higher than hydrogenic radiative losses, owing to ionisation power losses. P_{sep} is around 470 kW, which would imply (assuming 1:1 up/down symmetry and no activation of the inner target) that around 235 kW goes towards the lower Super-X chamber. In that case, the maximum inferred net electron cooling in the lower divertor baffled region can contribute up to 45 % of the total power going towards the lower divertor, which suggests that significant power losses occur outside the baffled region (e.g. baffle throat region and above), which increases as detachment proceeds. This is in agreement with IRVB findings.

As detachment proceeds, the power loss associated with ionisation reduces in the baffled region and electron cooling associated with MAD becomes more dominant (detachment phase II-IV) ¶ and can reach up to 20 % of the power going towards the lower divertor. Despite the low electron densities ($n_e \sim 10^{19} m^{-3}$ [10, 39, 40]), our analysis shows plasma heating from electron-ion recombination occurs (~ 15 kW) due to the very low electron temperatures ($T_e < 0.3$ eV [10] - see section 5.1).

Plasma-molecular reactions involving D_2^+ and, potentially, D^- , not only result in ion sinks & sources, but also lead to the generation of additional neutral atoms through Molecular Activated Dissociation (MAD) as well as MAR. Inferences of the volumetric creation processes of neutral atoms, integrated over the lower divertor chamber, are shown in figure 8. This shows that, throughout the entire discharge, MAD is the dominant neutral atom generation process. This is in agreement with previous findings on TCv [25], JET [41] as well as SOLPS-ITER modelling with modified rates for TCv [29].

3.3. Detachment evolution during a fuelling stop

As explained in section 2, the fuelling in the lower divertor is stopped for # 45371 at $t \sim 0.73$ s to monitor how a deeply detached divertor evolves during a loss of fuelling. In [10], it was shown that the emission associated with EIR re-attaches at the target after the fuelling stop occurs. Spatial profiles of ion sources & sinks as well as the hydrogenic radiation are shown in figure 9 before, at and after the fuelling stop, with a schematic illustration of the relevant detachment processes. The evolution of the divertor chamber integrated ion sources/sinks, hydrogenic power losses and volumetric neutral atom creation mechanisms during the fuelling stop can be observed in figures 5, 7, 8.

¶ Electron cooling associated with MAR is negligible as the hydrogenic radiative losses approximately cancel with the potential energy gained in the recombination process during MAR [3].

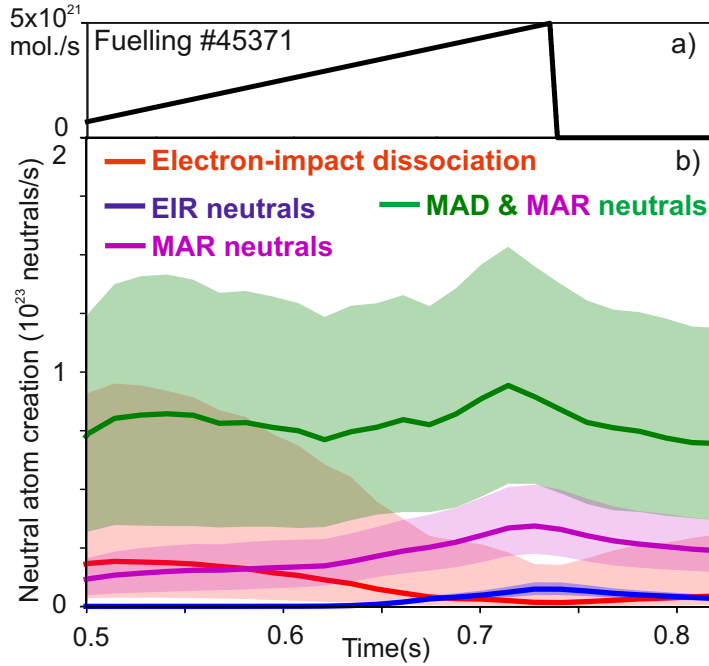


Figure 8. Total volumetric neutral atom source (/s) in the lower divertor chamber inferred spectroscopically. This includes the generation of neutral atoms through electron-impact dissociation of D_2 [16], electron-ion recombination, Molecular Activated Recombination and the combination of MAR & Molecular Activated Dissociation.

Within 80 ms from the stop of divertor fuelling: 1) the ionisation source moves back slightly towards the target (together with the total hydrogenic radiation region); 2) the peak in MAR moves downstream from the divertor entrance; 3) the electron-ion recombination re-attaches at the target, suggesting that the electron density front re-attaches at the target and that the divertor transitions back from detachment state IV into detachment state III. This is consistent with 1) a reduction of the MAR & EIR ion sink strength (figure 5); 2) an increase in the divertor ionisation source (figure 5); 3) a decrease in the divertor power losses associated with MAR & MAD (figure 7). Although the electron density region re-attaches at the target, the divertor remains deeply detached throughout the fuelling stop phase until the end of the discharge (100 ms). A longer fuelling stop is required to test how long it would take for the divertor to re-attach.

4. Results from a detached Super-X H-mode discharge (# 45121)

The discharge studied thus far (# 45371) has been chosen as it spans a large fraction of the detached operational regime (e.g., detachment phase I to IV). However, the observations obtained are general and have been observed also in ELMy Ohmic H-mode plasmas. One caveat is that the acquisition frequency of the spectroscopy system is insufficient to capture inter-ELM periods, which means that the brightness measurements are effectively averaged over both the ELM and inter-ELM periods.

The spatial profiles of the divertor ion sources & sinks, as well as the hydrogenic

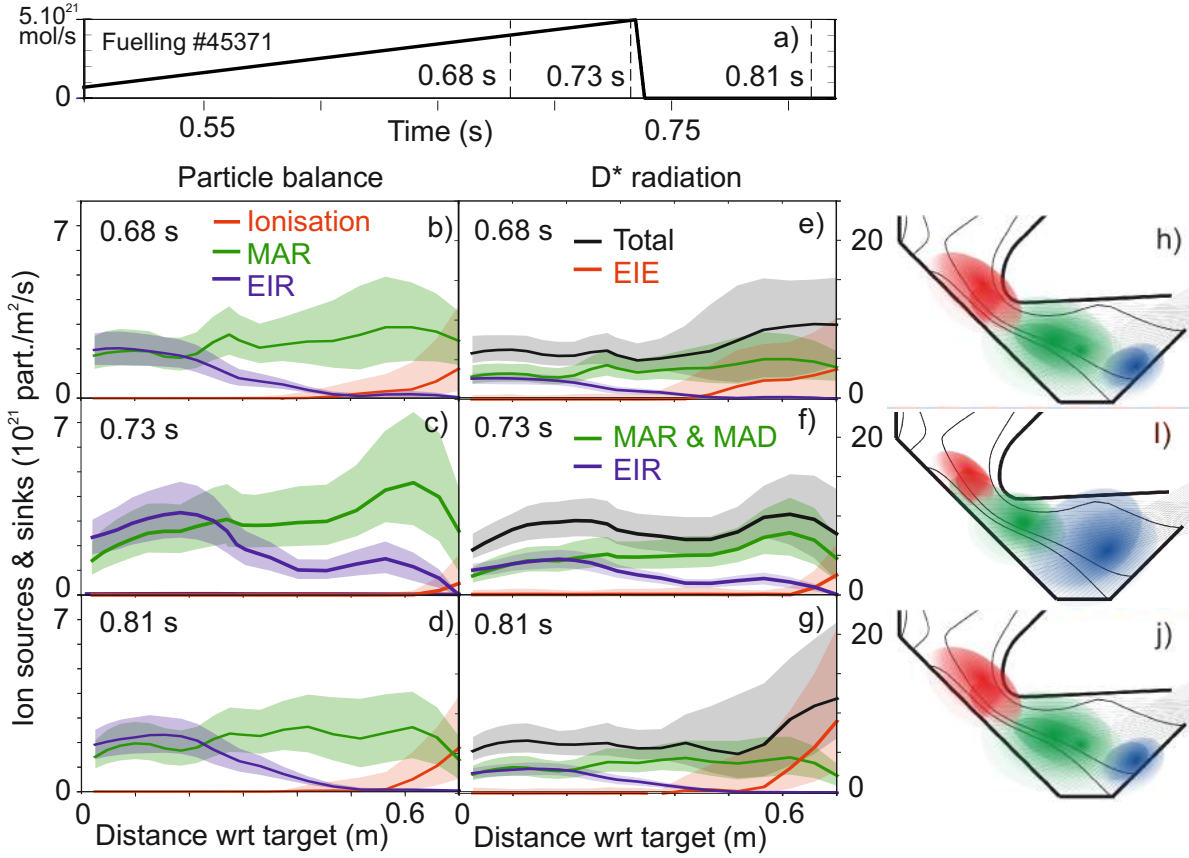


Figure 9. Ion source/sink profiles (b,c,d) & radiation profiles (e,f,g) during a gas cut (fuelling trace in a) with schematic of the detachment processes (h,i,j)

radiative losses, are shown at three different times in figure 10. The ionisation source is strongly detached from the target for all three different profiles, with MAR being significant downstream of the ionisation source and being slightly detached from the target. No significant presence of EIR is detected in these discharges. The hydrogenic radiation spatial profile is dominated by electron-impact excitation and exhibits a similar profile to the ionisation source. This observation is, qualitatively, comparable in terms of both divertor ion sources/sinks as well as hydrogenic radiative losses to the description of detachment phase II (~ 0.6 s) of # 45371 (figures 4 & 6). The inferred electron density from Stark broadening (not shown) is slightly higher for the $I_p = 750$ kA H-mode discharge ($\sim 3.3 \times 10^{19} m^{-3}$) than for the $I_p = 650$ kA L-mode discharge ($1.7 - 2.2 \times 10^{19} m^{-3}$). However, this difference is significantly smaller than the uncertainty in the Stark broadening inferences ($> 2 \times 10^{19} m^{-3}$). The core density is rising in the ELM-free H-mode phase, moving the ionisation front ~ 10 cm further upstream, with negligible changes to the MAR ion sink profile. No significant change in the spatially resolved profiles occurs in the type-I ELMy H-mode phase, where the core density is roughly constant between 0.49 s and 0.58 s.

Integrating these spatial profiles, we obtain estimates for the total ion sources/sinks as well as hydrogenic power losses, shown in figure 11. Ion sources and sinks, as well as

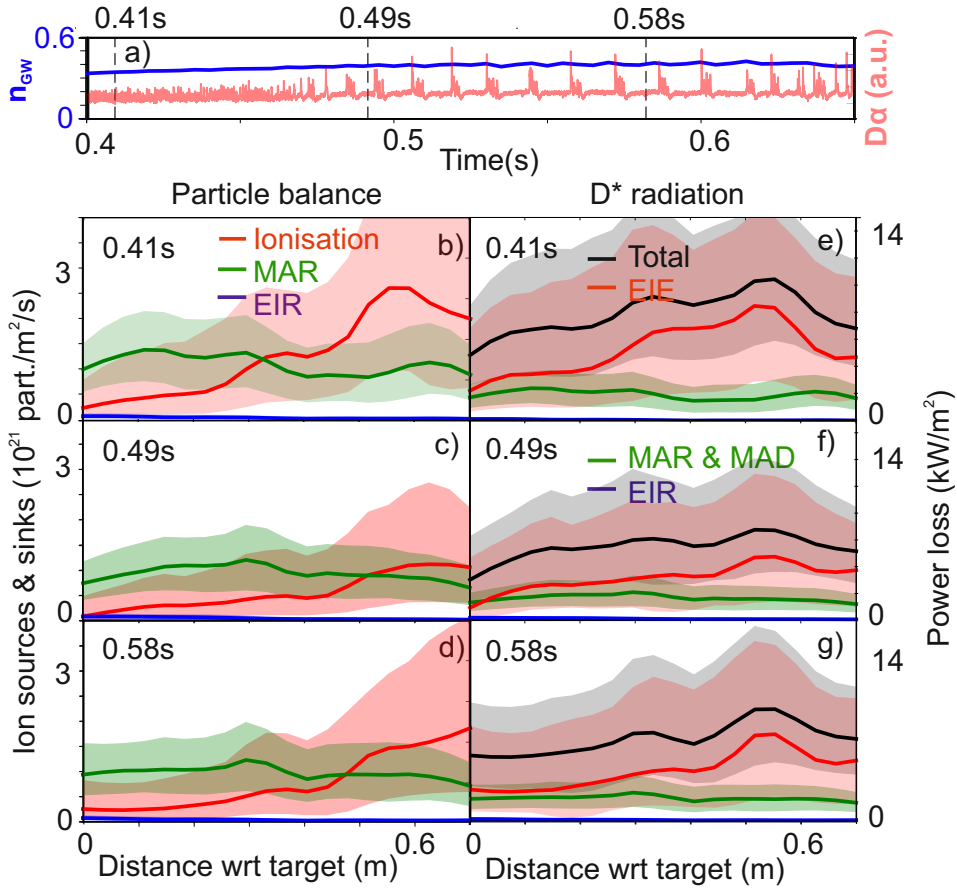


Figure 10. Power and particle loss profiles for Super-X H-mode - discharge # 45121. a) Evolution of core density (in terms of Greenwald fraction) and core tangential $D\alpha$ signal to monitor ELM activity, indicating a transitioning between an ELM-free H-mode and a type-I ELMy H-mode phase at $t = 0.465\text{s}$, with a vertical line indicating the three chosen time points. b-d) Spatially resolved 1D ion sources/sink profiles; e-g) Spatially resolved 1D hydrogenic (e.g. D^*) radiative losses - both inferred from BaSPMI analysis of spectroscopic measurements. The first profile (b,e) corresponds to the ELM-free H-mode phase of the discharge. The second profile (c,f) corresponds to just after the transitioning between the ELM-free and type-I ELMy H-mode phase. The third profile (d,g) corresponds to later in the type-I ELMy H-mode phase of the discharge.

hydrogenic power losses, are roughly constant in the type-I ELMy H-mode phase between 0.46 s and 0.6 s. The ionisation source is lowered when transitioning between ELM-free H-mode and type-I ELMy H-mode. This observation is consistent with observation that the ionisation source has moved further upstream in the type-I ELMy H-mode phase. No significant changes in P_{sep} have been detected between the ELM-free and type-I ELMy H-mode phases. After 0.6 s, the ELM frequency seems to increase, correlated with a decrease in the core density. According to both the DMS and MWI observations, this may make the plasma slightly less detached as the ionisation source is increased and the Fulcher emission moves slightly closer to the target.

Figure 11 e,f shows an inversion of the D_2 Fulcher emissivity of the MWI diagnostic inter-ELM ($t = 0.5\text{ s}$) and during an ELM ($t = 0.6\text{ s}$) with an exposure time of 2.2 ms.

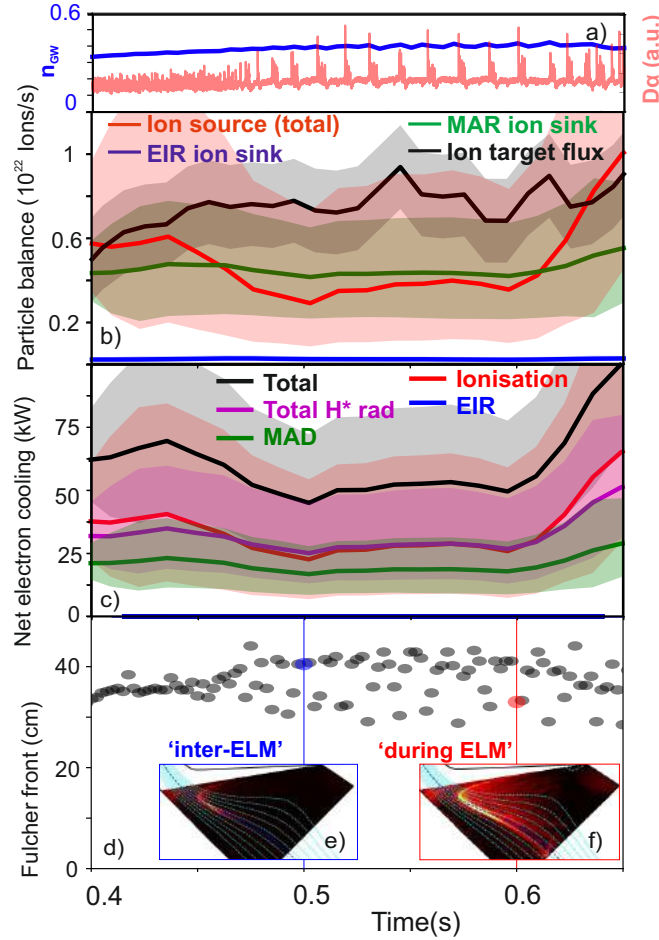


Figure 11. Ion sources/sinks and hydrogenic power losses integrated over the lower divertor chamber for # 45121. a) Evolution of core density (in terms of Greenwald fraction) and core $D\alpha$ signal to monitor ELM activity. b) Integrated ion sources/sinks using BaSPMI analysis of spectroscopic measurements. c) Integrated net hydrogenic electron cooling using BaSPMI analysis of spectroscopic measurements. d) Time trace of 50 % peak position of the Fulcher front along the separatrix with respect to the target in the poloidal plane [33], with $t=0.5$ s (inter-ELM, blue) and $t=0.6$ s (during an ELM, red) highlighted. e,f) D_2 Fulcher emissivity inversion at $t=0.5$ s and $t=0.6$ s respectively with indicated magnetic geometry.

The time evolution of the 50 % front position of the Fulcher emission with respect to the target in the poloidal plane is also shown as function of time (figure 11 d). This suggests a movement of the inter-ELM Fulcher emission upstream after the transition to type-I ELMy H-mode, which is in agreement with the spectroscopic inferences in figures 11,10. At this point, a bifurcation of the front position exists between a value that is higher up (inter-ELM) and a lower value (during an ELM). The D_2 Fulcher emission front, which is a proxy for the ionisation source, does not seem to reach the target, even during an ELM. This may suggest that the ionisation source is not burning through the deeply detached divertor during an ELM in these Ohmic L-mode conditions. However, that cannot be stated with any certainty as some part of the exposure time still corresponds

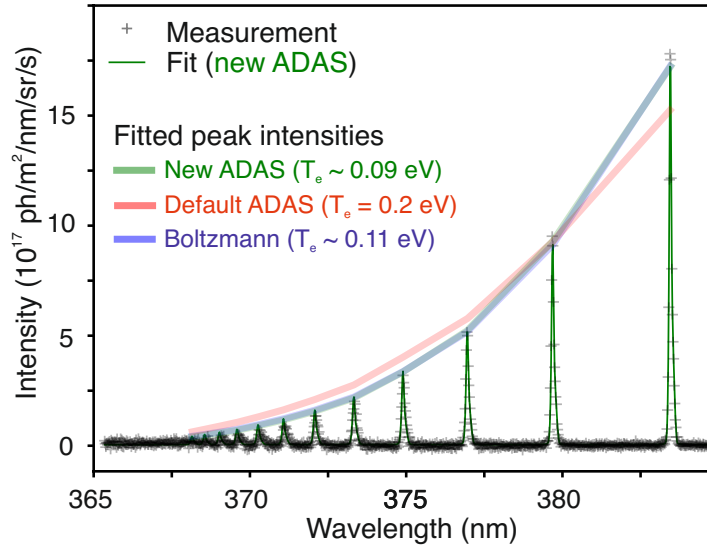


Figure 12. High- n Balmer line spectra from # 45370 from line-of-sight 6 (see figure 2) at $t = 0.8$ s with example high- n Balmer line fit using new ADAS data that can go below 0.2 eV ($T_e = 0.09$ (0.08 – 0.1) eV, $n_e = 3.5 \times 10^{18} m^{-3}$). High- n Balmer line fits using standard ADAS data ($T_e = 0.2$ eV, $n_e = 5.1 \times 10^{18} m^{-3}$) as well as a Boltzmann relation ($T_e = 0.11$ (0.1 – 0.11) eV, $n_e = 3.7 \times 10^{18} m^{-3}$) have also been performed, but, for clarity, only peak intensities are shown in the figure rather than the full fit. The line of sight used is significantly downstream of the electron density bulk ($n_e \sim 1.4 \times 10^{19} m^{-3}$) at . Transparent lines are shown connecting the peaks of the various Balmer lines for the three different fits, showing an overlap between the Boltzmann fit and fit with new ADAS data and a mismatch between the measurement and the default ($T_e = 0.2$ eV) ADAS data.

to the inter-ELM phase. Further investigations at higher power and with diagnostics that can perform temporal resolved measurements during an ELM are required and an ultrafast divertor spectroscopy system is in development.

5. Discussion

5.1. Evidence for sub-eV temperatures in the MAST-U Super-X divertor

Previous research [10] provided evidence for T_e near or below 0.2 eV in the electron-ion recombination region. However, quantitative analysis required regenerating ADAS data for electron-ion recombination that can go below 0.2 eV. Three methods were used: 1) including the updated ADAS data in the ionisation sinks & source analysis; 2) fitting the high- n Balmer line spectra using the high- n Balmer line photon emission coefficients obtained from the new ADAS data; 3) using the new ADAS data, combined with the Stark broadening inferred electron densities, to infer the effective emission path-length and compare this against expectations based on camera data. All three methods find T_e inferences below 0.2 eV, and show that the new ADAS data is necessary for improving the match between modelled and observed data.

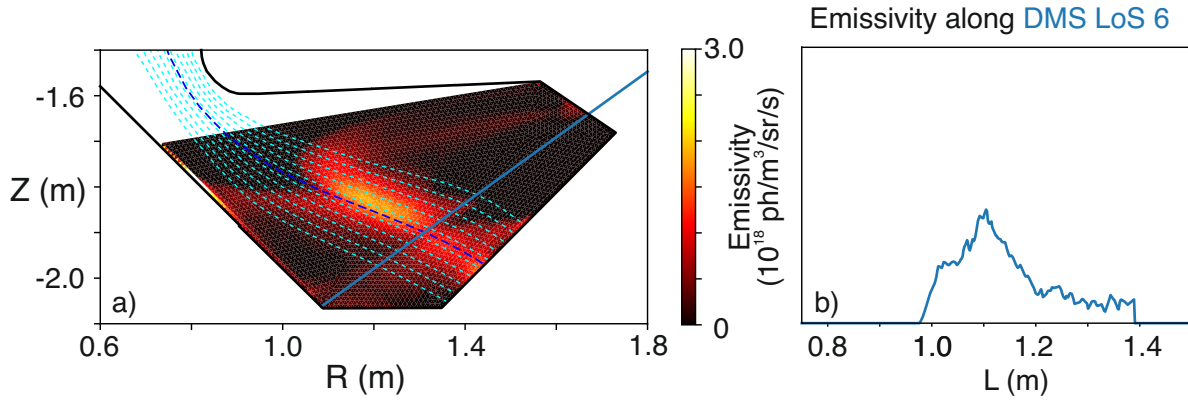


Figure 13. a) Emissivity of the $n = 9$ Balmer line, obtained by inverting the MWI imaging data, at 0.755 s for # 45370 with DMS line-of-sight (LoS) 6 indicated. b) $n = 9$ Balmer line emissivity profile along the DMS line-of-sight 6.

The characteristic temperatures of the electron-ion recombination region during deep detachment were found to be around $T_e^{EIR} = 0.17 \pm 0.05$ eV using both BaSPMI and a full Bayesian approach. No solution could be found with the default ADAS data, as the brightness of the EIR emission could not be explained. Using ADAS photon emission coefficients to fit the high- n ($n \geq 9$) Balmer line spectra shows a clear mismatch between model and observation when the default ADAS data was used and the fitting procedure would hit the 0.2 eV ADAS limit. Using the new ADAS data, temperatures below 0.2 eV are inferred, in agreement with that obtained when a Boltzmann model is used for the fit instead [10]. This is shown in figure 12 where all three fit models are compared for a deeply detached discharge (# 45370, 450 kA Ohmic high density discharge (phase IV detachment) - see [10] for more information) with high- n ($n \geq 9$) coverage of the Balmer lines.

Assuming the high- n Balmer line emission brightness is fully dominated by EIR, the inferred T_e and n_e from the high- n Balmer line fit can be used to estimate the emission path-length [10]: $\Delta L = \frac{B_{n \geq 9}}{n_e^2 P_{EC_n}^{EIR}(n_e, T_e)}$. For the fit shown in figure 12, the obtained ΔL using the new ADAS data was found to be $\Delta L = 0.30$ (0.27 – 0.35) m ($T_e = 0.09$ (0.08 – 0.1) eV) for a deeply detached discharge with high- n ($n \geq 9$) coverage of the Balmer lines. Assuming $T_e = 0.2$ eV instead (default ADAS limit), the obtained path lengths would be longer than the DMS line of sight ($\Delta L = 1.8$ (1.6 – 2.0) m assuming the same n_e). The path lengths can also be estimated experimentally by inverting the MWI observations [42, 33], which was shown for a specific discharge in figure 13, and found to be in acceptable agreement with the ΔL obtained using the new ADAS data. In addition, the measured brightness and that obtained by integrating the DMS chord along the MWI inversion agrees within 2.5%.

5.2. Inferences of plasma flows

In this work, we observe a clear transition between an ionising and recombining region (due to MAR) in the divertor plasma (see figure 4). Such a strong transition between recombination and ionisation is expected to have a significant impact on the ion flow. We have estimated the flow profile qualitatively using ion target flux measurements from Langmuir probes, spectroscopically inferred ion sources and sinks and spectroscopically estimated electron densities (for details, see Appendix B.)

The qualitative result obtained in figure 14 shows that the particle flow is accelerating towards the target close to the detachment onset (detachment phase I - figure 14 a). As detachment deepens, the particle flow profile flattens as ion sources and sinks start to balance in the divertor chamber (detachment phase II - figure 14 b). Ultimately, the ion flow into the divertor chamber becomes significant, increasing the flow velocity upstream, which decelerates towards the target due to the large ion sink (detachment phase III - figure 14 c, d). Such ion flow profiles are qualitatively consistent with those obtained from MAST-U SOLPS-ITER modelling [34].

5.3. Impact of fuelling location on diagnostics and detachment

The location of the fuelling can impact diagnostic observations as well as the physics of plasma detachment. Although there are significant differences in the spectroscopic setup of the lower and upper divertor, the onset of EIR (detachment phase III) can be compared between both divertor chambers. This occurs at similar times between the lower and upper divertor when high field side fuelling (# 45243, [43]; # 45370) and balanced upper/lower divertor fuelling (# 45372) is used. However, the discussed L-mode discharge # 45371 is fuelled from the lower divertor, in which the onset of EIR occurs first in the lower divertor. Likewise, upper divertor fuelling leads to onset of EIR first in the upper divertor (# 45372). Therefore, our spectroscopic inferences for the lower divertor fuelled discharge # 45371, as well as the radiative power losses, are likely up/down asymmetric. The used discharges have a slight up/down imbalance ($dr_{sep} \approx 1$ mm), which was observed (in other, high-field side fuelled, discharges) to symmetrise the upper/lower divertor particle fluxes⁺. Therefore, we do not have any reason to assume that significant asymmetries occur in these discharges when main chamber fuelling is used.

Apart from the impact of different poloidal fuelling locations, different toroidal fuelling locations may also impact diagnostic observations as well as the physics of detachment. Additionally, as mentioned in [10, 33], penetration of the error field as well as MHD activity caused a bifurcation of the divertor leg, leading to toroidally asymmetric strike point splitting; which was a result of the operation at low core densities (15% Greenwald fraction). In [33], an agreement within uncertainties was found between multi-wavelength imaging (MWI) inversions and line-of-sight spectroscopy (DMS) for

⁺ Upper and lower particle fluxes could not be compared for the studied discharges due to various gaps in the Langmuir probe coverage

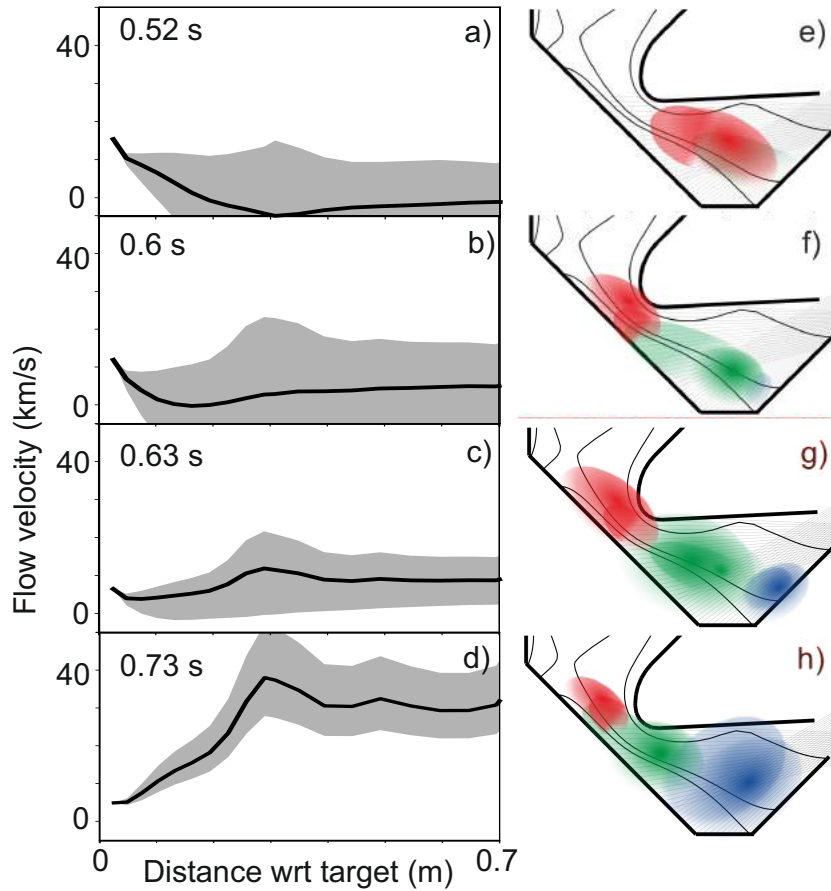


Figure 14. Inferred plasma flow profile using ion sources/sinks (spectroscopy), electron density estimates (Stark broadening, spectroscopy) and ion target fluxes (Langmuir probes) for # 45371 (a-d) at four different time points in the Super-X divertor during a fuelling scan, indicative of the evolution of the four different phases of detachment illustrated in figure 1. (e-h) Schematic overview of divertor ion sources/sinks adopted from figure 1. These calculations only include uncertainties provided by the BaSPMI analysis, uncertainties in n_e , I_t and A_{eff} are neglected and, therefore, the results are only qualitative.

midplane fuelled discharges, but not for # 45371. The DMS lines of sight are toroidally close to the lower divertor fuelling valve. Hence, higher brightnesses were reported by the DMS as well as slightly earlier (e.g. at lower fuelling levels) appearances of the different phases of detachment, as compared to the MWI; since the DMS is impacted by the local fuelling response. Therefore, some of ion sources and sink inferences in this work may have been overestimated for # 45371 due to toroidal asymmetries.

Although the ion source/sink magnitudes can vary between different discharges, the reported spatial profiles of the various inferences as well as the strengths of the various inferences can be considered characteristic for these Ohmic L-mode. Using midplane fuelled discharges only would not affect our conclusions of this work, based on BaSPMI analysis from other discharges.

5.4. The implications, relevance and importance of our findings

Our results show the tightly baffled MAST-U Super-X divertor results in unprecedented deeply detached divertors. Compared to previous TCV findings [25, 3] during density ramp discharges in the open divertor, the ratio between the ion target flux and the (MAR) ion sink at the deepest levels of detachment (60 % Greenwald fraction) is similar to the onset of detachment phase in MAST-U (15 % Greenwald fraction). The chordally integrated EIR ion sink on MAST-U at the deepest detached state, compared to TCV, is a factor four larger, despite the much lower electron density in the MAST-U divertor ($\sim 10^{19} m^{-3}$). This suggests very low electron temperatures in the MAST-U Super-X divertor, which has been supported experimentally ($T_e < 0.2$ eV). Such findings support the expectation that the MAST-U Super-X divertor leads to greatly improved divertor exhaust.

That expectation is supported by the finding that hydrogenic radiation is the dominant radiative power loss *in the divertor chamber*, despite the MAST-U carbon walls, which is in contrast with TCV findings [11]. Additional support for the improved divertor exhaust performance is provided by:

- (i) The observation that such deeply detached conditions also exist in Ohmic H-mode operation, where the SOL width is presumably more narrow.
- (ii) Deeply detached conditions do not lead to a cascading effect where the various detachment regions move further and further upstream regardless of the fuelling used.
- (iii) A loss of fuelling leads to a gradual movement of the various detachment fronts back towards the target; a loss of fuelling for 100 ms does not result in re-attachment. *

Although the Super-X divertor shows strongly enhanced exhaust capabilities, it is unknown at this stage how much tight baffling and divertor closure relatively contribute to the observed divertor performance of the MAST-U Super-X and more analysis and comparison of different magnetic geometries as well as potentially cryopumping in the divertor to remove the baffle chamber neutrals is required to answer that question. Such a question should be addressed through a combination of experiments and model comparisons.

It is also unknown how MAST-U results scale to reactor-like conditions. Validation of plasma-edge simulations for alternative divertor configurations is required on MAST-U to reduce the uncertainties in extrapolating this current knowledge to reactor-class devices. Such validation exercises are particularly challenging, however, by the deeply detached conditions of the MAST-U Super-X divertor in which processes such as MAR play a role that are not properly covered in plasma-edge simulations [29]. Additionally, the Super-X divertor is particularly difficult to attach, which requires operation at low densities where strike point splitting occurs, complicating such validation exercises.

* Likely, detachment can be maintained without fuelling for significantly longer than 100 ms, but dedicated discharges are required to test this.

Modifications in the setup of plasma-edge simulations may be required to improve their capabilities at simulating such deeply detached plasmas. Although such deeply detached plasmas may not, directly, be reactor relevant, it may be a requirement for validating the capability of simulating tightly baffled novel divertor concepts. This is required to reduce the uncertainties in extrapolating this current knowledge to reactor-class devices.

Our results indicate that the MAST-U Super-X divertor during Ohmic L-mode operation is underpowered: midway the detachment operational regime ion sinks dominate over ion sources in the divertor and the ion target flux is driven by ion flows from upstream. Operation at higher power conditions is required to fully test the performance of the Super-X divertor.

5.4.1. Implications for plasma-edge simulations Our results demonstrate that plasma-molecular interactions play a crucial role in the Super-X divertor physics of MAST Upgrade, especially in terms of additional ion sinks and neutral atom sources after detachment onset. Electron cooling power arising from MAD can also be non-significant (20 % of P_{sep}). Interpretive SOLPS-ITER modelling underestimates the loss of ion target flux post-roll-over for MAST-U due to a lack of MAR ion sinks compared to the experiment [9]. Such observations are consistent with SOLPS-ITER modelling for TCV [28, 44, 26, 29], which also lacks ion target flux roll-over and MAR ion sinks. These discrepancies arise from the underestimation of D_2^+ content in detached SOLPS-ITER simulations due to inaccuracies in the rates used for molecular charge exchange by Eirene [3, 29, 45]. This work reveals the need for addressing gaps in plasma-edge modelling to reduce uncertainties when extrapolating current knowledge to reactor-class devices.

Our findings of MAR ion sinks, even in electron-ion recombination-dominant plasma ($T_e < 0.2$ eV), disagree with EIRENE's molecular charge exchange rates [10, 29]. Even when modified rates are used [46], such observations require ion temperatures significantly higher than electron temperatures ($T_i \sim 1$ eV), unlikely in SOLPS-ITER simulations due to rapid equipartition in the highly collisional plasma near the target, or highly vibrationally excited molecules reaching the cold detached region. Although electron collisions are possibly ineffective at such low temperatures to promote vibrational excitation, vibrationally excited molecules may be generated in one part of the plasma and transported into the cold region [47]. Electron collisions as well as re-distribution of vibrationally excited levels through electronically excited states [48, 49] may play a role in generating such vibrationally excited molecules. Alternatively, plasma-surface interactions may result in higher vibrationally excited molecules in the cold detached region. Further research is necessary regarding the vibrational distribution, using both experimental measurements (D_2 Fulcher band spectroscopy [43]) and modelling. Underestimates of MAR may lead to incomplete estimates of particle balance in SOLPS-ITER and affect the spatial profile of ion sources and sinks, which could lead to discrepancies in the plasma flow profile (section 5.2) of plasma-edge simulations.

New ADAS data confirms previous analyses of $T_e < 0.2$ eV conditions during detachment in the MAST-U Super-X divertor. This suggests the need for re-assessment

of atomic and molecular data for studies on alternative divertor configurations, both for diagnostic inferences and plasma-edge simulations, to ensure the validity of the data used in the relevant temperature regime.

5.4.2. Implications of the importance of hydrogenic power losses Our findings showed that the hydrogenic radiative power losses in the Super-X chamber are in agreement with the total measured radiative power losses by bolometry, suggesting insignificant contributions of intrinsic carbon radiative losses *in the divertor chamber* despite the carbon walls on MAST-U. In contrast, TCV findings [11, 3] show that the hydrogenic radiative losses were only $\sim 20\%$ of the total measured radiative loss by bolometry in experiments without extrinsic seeding. The difference between hydrogenic and total radiative losses was attributed to intrinsic carbon radiative losses. This difference between MAST-U and TCV is an important result that is in agreement with both TCV [28, 44, 26] as well as MAST-U [9] interpretive SOLPS-ITER simulations ‡; which needs to be accounted for when comparing MAST-U and TCV results. For MAST-U, the magnitude of the CII (426 nm) brightness (DMS) and CIII (465 nm) emissivity (MWI) are in agreement within 50 % of the simulations, suggesting that the carbon content in the simulation is similar to that of the experiment.

The finding that hydrogenic power losses are dominant in MAST-U may be a result of the tightly baffled Super-X divertor. The tight baffling concentrates plasma-neutral interactions in the MAST-U divertor chamber, amplifying hydrogenic power losses. Simultaneously, the Super-X divertor results in reduced ion target fluxes as well as a reduced detachment onset threshold, greatly reducing the ion target flux and hence - at a fixed chemical sputtering percentage - the chemical erosion of carbon would be reduced. Additionally, the electron temperature could be significantly lower in the cold MAST-U Super-X divertor conditions, which can displace or remove the carbon radiation from the divertor chambers. MAST-U operation at higher power may lead to more significant ion fluxes towards the target and more chemical sputtering, and thus a higher carbon impurity concentration and more carbon radiative losses.

These results do not imply that carbon radiation upstream of the divertor entrance is insignificant. Carbon radiation likely plays a more significant, if not dominant, role upstream of the divertor chamber near the X-point region and the scrape-off-layer. In the main chamber, the carbon concentration may be elevated due to main chamber erosion [47]. Further research into the carbon concentrations and radiation upstream and in the divertor chamber is required for understanding the MAST-U power balance.

6. Conclusions

Quantitative investigation of plasma-atom and molecular interactions have led to inferences of the the divertor ion sources and sinks and hydrogenic power losses. This has shown that Molecular Activated Recombination (MAR) plays an unprecedented strong

‡ A 5% chemical erosion yield is assumed for TCV, whilst the Haasz-Davis model is used for MAST-U.

role in the physics of the MAST Upgrade Super-X divertor. Our results indicate that the detached operational window of the MAST-U Super-X divertor, in terms of core density, is very large and ion sinks dominate over ion sources in the divertor chamber overall for a significant part of that operational window. This implies that ion flows from outside the divertor chamber are significant, leading to an amplified ion flow at the entrance of the divertor baffle that is decelerated as the plasma moves to the target. After the detachment onset, the ionisation source detaches from the target and MAR builds up in the entire divertor chamber. The onset of MAR occurs before electron-ion recombination (EIR) and MAR remains a dominant ion sink even when EIR becomes significant. When EIR becomes significant, electron temperature estimates below 0.2 eV are reported based on new ADAS data in combination with multi-wavelength imaging of the high-n Balmer line series. Spectroscopic inferences of the total hydrogenic radiative loss in the divertor are in agreement with imaging bolometry, implying that hydrogenic radiation is the dominant radiative loss mechanism, despite MAST-U featuring a carbon wall. The radiation profile is peaked near the ionisation source, where it is dominated by electron-impact excitation. However, the total power losses can have significant components from plasma-molecular interactions, which are more spread out in the divertor and lead to MAR and Molecular Activated Dissociation (MAD), which is the dominant volumetric neutral atom generation mechanism. These findings are general and are observed during Ohmic L-mode as well as Ohmic H-mode plasmas (ELM integrated). ELM temporally resolved measurements using multi-wavelength imaging indicates that the ionisation source is significantly detached from the target inter-ELM.

7. Acknowledgements

Discussions with Juuso Karhunen have been very helpful and have been kindly acknowledged. This work has received support from EPSRC Grants EP/T012250/1 and EP/N023846/1. This work has been carried out within the framework of the EUROfusion Consortium, partially funded by the European Union via the Euratom Research and Training Programme (Grant Agreement No 101052200 — EUROfusion). The Swiss contribution to this work has been funded by the Swiss State Secretariat for Education, Research and Innovation (SERI). Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union, the European Commission or SERI. Neither the European Union nor the European Commission nor SERI can be held responsible for them. To obtain further information on the data and models underlying this paper please contact publicationsmanager@ukaea.uk.

Appendix A. BaSPMI implementation and determining MAR/MAD/MAI estimates

This work uses a fully Bayesian version of BaSPMI [10]. This provided similar results to the older method [25], however the full Bayesian version was more stable in detachment

onset conditions. As no $D\beta$ information is available for these discharges, we cannot analyse the relative roles of $D_2^- \rightarrow D^- + D$ and D_2^+ and the analysis assumes that all hydrogen emission from plasma-molecular interactions arises from interactions with D_2^+ . As explained in [3], this is not expected to have an impact on the estimates of the various ion sources & sinks. Additional analysis using $D\beta$ measurements would be required to make any statement on the relative roles of D_2^+ and $D_2^- \rightarrow D^- + D$ experimentally.

The BaSPMI analysis uses visible hydrogen emission from excited atoms to infer which process led to that excited atoms. Therefore, BaSPMI is able to sense photons arising from excited atoms after D_2^+ interacts with the plasma, but it cannot infer which process created D_2^+ . There are two processes that can create D_2^+ : 1) molecular charge exchange, particularly important at lower temperatures ($D_2 + D^+ \rightarrow D_2^+ + D$) and D_2 ionisation ($e^- + D_2 \rightarrow D_2^+ + 2e^-$), relevant at higher temperatures ($T_e > 4$ eV). Whether an interaction with D_2^+ leads to MAR, MAD or MAI depends on the process that created D_2^+ . As such, the fraction of D_2^+ created by molecular charge exchange must be modelled to infer the MAR, MAD and MAI magnitudes [16]. Assuming there is no transport of D_2^+ (which is plausible, given the high reactivity and thus short lifetimes of D_2^+), this can be modelled using the ratio between the molecular charge exchange rate and the sum of the D_2 ionisation and molecular charge exchange rates. Both these two rates depend on the vibrational distribution.

A model for the vibrational distribution has been implicitly assumed when the polynomial fit coefficients used within Eirene (AMJUEL) were derived. Inaccuracies in both the model for the vibrational distribution as well as the vibrationally resolved reaction cross-sections [29] can affect the fraction of D_2^+ created by molecular charge exchange. Therefore, the fraction of D_2^+ created by molecular charge exchange is modelled using Monte Carlo uncertainty propagation. In this, vibrationally resolved molecular charge exchange rates from [46] are used for molecular charge exchange, which are based on vibrationally resolved simulations. This is in contrast to the rates used by Eirene, which are based on measurements of the ground state, that are rescaled to higher vibrational levels using an oversimplified analytic rescaling [29, 50, 51, 52]. Since the vibrational distribution is unknown, uncertainty propagation is used to sample random vibrational distributions, with log-uniform priors on the fraction of each vibrational state. For each Monte Carlo sample, the vibrational distribution is normalised. Since the molecular charge exchange vibrationally resolved rates depend on the ion temperature, it is assumed that the ion temperature is between 80% and 150% of the electron temperature. The differences in the relative velocity for between H_2 (which is static) and H^+ at different isotope masses is accounted for. Uncertainties of 200 % on the magnitudes of the reaction rates is assumed. For H_2 ionisation, the vibrationally resolved rates from H2VIBR, which contains polynomial fit coefficients to express those rates, are used; which is originally from [53, 54].

The result of uncertainty propagation indicates that, although there are large uncertainties on virtual all input parameters, this only causes small/negligible uncertainties in the ratio between the molecular charge exchange rate and the total D_2^+

creation rate, which implies negligible uncertainties in the determination of MAR / MAD and MAI when plasma-molecular interactions contribute significantly to the hydrogenic emission. This is because the temperature ($T < 2$ eV), in the regime where significant MAR / MAD / MAI occurs, is sufficiently low such that the fraction of D_2^+ generated through molecular charge exchange is nearly 1, despite the various uncertainties. This is in contrast with recent JET analysis that finds that MAR and MAI can cancel each other, even at very low temperatures [41]. That difference is caused by the usage of the 'H2VIBR' rates for molecular charge exchange in [41], which are based on applying an analytic scaling [51] to the cross-sections for molecular charge exchange in the vibrational ground state [52, 50], resulting in potentially severely underestimated molecular charge exchange rates [10]. This may have resulted in underestimated MAR estimates and overestimated MAI estimates for JET in [41] at $T < 2$ eV; at such temperatures one would not expect H_2 ionisation to be significant [30].

MAI could, however, play a role outside of the region where strong emission from excited atoms after plasma-molecular interactions occurs. In that region, our analysis cannot distinguish between ionisation and MAI, given the similarity in the emission signatures between these two [3]. However, SOLPS-ITER simulations for TCV both with the default rate setup and a modified rate setup where ion isotope mass rescaling of the molecular charge exchange rate was disabled, find only small ($< 15\%$) MAI contributions to the total ion source for both cases [29].

Appendix B. Inferring ion flow profiles using particle balance

Mass conservation (equation B.3) can be used to estimate the flow profile qualitatively. Here, $S_{ion}(x)$ and $S_{rec}(x)$ are the volumetric ion sources and sinks (ions/ m^3/s) and v is the velocity.

$$\frac{d}{dx}n_e(x)v(x) = S_{ion}(x) - S_{rec}(x) \quad (\text{B.1})$$

$$A_{eff}(x)\frac{d}{dx}n_e(x)v(x) = A_{eff}(x)S_{ion}(x) - A_{eff}S_{rec}(x) \quad (\text{B.2})$$

$$v(\xi) = \frac{\int_{up}^{\xi} A_{eff}(x)(S_{ion}(x) - S_{rec}(x))dx + I_u}{A_{eff}(\xi)n_e(\xi)} \quad (\text{B.3})$$

The spectroscopic estimates of the divertor ion sources and sinks are, however, chordally integrated; and the ion target fluxes have been integrated over the outer target. To utilise mass conservation for such spatially integrated quantities, we multiply both sides of B.3 with an effective area $A_{eff}(x)$. In this case, $A_{eff}n_e v|_{target} = I_t$ and $A_{eff}n_e v|_{upstream} = I_u = I_i - I_r + I_t$ - equation 1). Here, I_i , I_r are the ion sources and ion sinks inferred spectroscopically, integrated over the entire divertor domain (figure 5), which can be expressed as $\int_{up}^{target} A_{eff}(x)(S_{ion}(x) - S_{rec}(x))dx$. Performing this integral not over the entire domain, but up until some point ξ allows us to obtain a qualitative measure of the effective area times the flow velocity, as indicated in equation B.3. The

effective area A_{eff} at a position along the divertor leg, is approximated as $2\pi R(x)\Delta L$, where $\Delta L = 0.01$ m is assumed (characteristic assumed width of the flux bundles carrying most heat, based on MAST upstream scalings mapped to the target using the poloidal flux expansion [55]) and $R(x)$ is the radius of the separatrix position at some distance with respect to the target (x).

An electron density profile is also required for estimating the flow profile (equation B.3) and for this, the electron density inferred through Stark broadening is used. Although the absolute uncertainty on the inferred Stark electron density is significant, this is a systematic uncertainty and the relative trends are more reliable (see [10]). Since the density, A_{eff} and I_t cannot be relied upon quantitatively, the flow velocity at the target is scaled such that it matches (at least) the sound speed at the target, according to the Bohm criteria [56]. The target temperature was estimated spectroscopically as an average of the characteristic temperature for the EIE and EIR emission regions, weighted by the relative radiative losses of both processes. This led to a scaling factor of 1.7 – 2.8, increasing the ion flow velocity. This may suggest that the electron density near the target is overestimated by the Stark broadening analysis, which was suspected in [10] and would reduce the inferred flow velocity (equation B.3).

- [1] Pitts R, Bonnin X, Escourbiac F, Frerichs H, Gunn J, Hirai T, Kukushkin A, Kaveeva E, Miller M, Moulton D, Rozhansky V, Senichenkov I, Sytova E, Schmitz O, Stangeby P, De Temmerman G, Veselova I and Wiesen S 2019 *Nuclear Materials and Energy* **20** 100696 ISSN 2352-1791 URL <https://www.sciencedirect.com/science/article/pii/S2352179119300237>
- [2] Wenninger R, Bernert M, Eich T, Fable E, Federici G, Kallenbach A, Loarte A, Lowry C, McDonald D, Neu R *et al.* 2014 *Nuclear Fusion* **54** 114003
- [3] Verhaegh K, Lipschultz B, Harrison J, Duval B, Fil A, Wensing M, Bowman C, Gahle D, Kukushkin A, Moulton D, Perek A, Pshenov A, Federici F, Février O, Myatra O, Smolders A, Theiler C, the TCV Team and the EUROfusion MST1 Team 2021 *Nuclear Fusion* **61** 106014 URL <https://doi.org/10.1088/1741-4326/ac1dc5>
- [4] Lipschultz B, Terry J L, Boswell C, Hubbard A, LaBombard B and Pappas D A 1998 *Physical Review Letters* **81** 1007–1010 ISSN 0031-9007 URL <https://journals.aps.org/prl/abstract/10.1103/PhysRevLett.81.1007>
- [5] Stangeby P C 2018 *Plasma Physics and Controlled Fusion* **60** 044022 ISSN 0741-3335
- [6] Krasheninnikov S I and Kukushkin A S 2017 *Journal of Plasma Physics* **83** 155830501 ISSN 0022-3778
- [7] Havlickova E, Harrison J, Lipschultz B, Fishpool G, Kirk A, Thornton A, Wischmeier M, Elmore S and Allan S 2015 *Plasma Physics and Controlled Fusion* **57** 115001 ISSN 0741-3335 URL <Go to ISI>://WOS:000374538100002 <http://iopscience.iop.org/article/10.1088/0741-3335/57/11/115001/pdf>
- [8] Theiler C, Lipschultz B, Harrison J, Labit B, Reimerdes H, Tsui C, Vijvers W A J, Boedo J A, Duval B P, Elmore S, Innocente P, Kruezi U, Lunt T, Maurizio R, Nespoli F, Sheikh U, Thornton A J, van Limpt S H M, Verhaegh K, Vianello N, Team T and Team E M 2017 *Nuclear Fusion* **57** 072008 ISSN 0029-5515 URL <http://iopscience.iop.org/article/10.1088/1741-4326/aa5fb7/pdf>
- [9] 2023 *Nuclear Fusion*, to be submitted
- [10] Verhaegh K, Lipschultz B, Harrison J, Osborne N, Williams A, Ryan P, Allcock J, Clark J, Federici F, Kool B, Wijkamp T, Fil A, Moulton D, Myatra O, Thornton A, Bosman T, Bowman C, Cunningham G, Duval B, Henderson S, Scannell R and the MAST Upgrade team 2022 *Nuclear Fusion* **63** 016014 URL <https://dx.doi.org/10.1088/1741-4326/aca10a>
- [11] Verhaegh K, Lipschultz B, Duval B, Février O, Fil A, Theiler C, Wensing M, Bowman C, Gahle D,

- Harrison J *et al.* 2019 *Nuclear Fusion* **59**
- [12] Krasheninnikov S I 1998 *Czechoslovak Journal of Physics* **48** 97–112 ISSN 0011-4626
- [13] Kukushkin A S, Krasheninnikov S I, Pshenov A A and Reiter D 2017 *Nuclear Materials and Energy* **12** 984–988 ISSN 2352-1791
- [14] Février O, Theiler C, Harrison J R, Tsui C K, Verhaegh K, Wüthrich C, Boedo J A, Oliveira H D, Duval B P, Labit B, Lipschultz B, Maurizio R, Reimerdes H and and 2020 *Plasma Physics and Controlled Fusion* **62** 035017
- [15] Stangeby P C and Chaofeng S 2017 *Nuclear Fusion* **57** 056007 ISSN 0029-5515
- [16] Verhaegh K, Lipschultz B, Duval B, Fil A, Wensing M, Bowman C and Gahle D 2019 *Plasma Phys. Control. Fusion* **61**
- [17] Terry J L, Lipschultz B, Pigarov A Y, Krasheninnikov S I, LaBombard B, Lumma D, Ohkawa H, Pappas D and Umansky M 1998 *Physics of Plasmas* **5** 1759–1766 ISSN 1070-664x
- [18] Terry J L, Lipschultz B, Bonnin X, Boswell C, Krasheninnikov S I, Pigarov A Y, LaBombard B, Pappas D A and Scott H A 1999 *Journal of Nuclear Materials* **266-269** 30–36 ISSN 0022-3115
- [19] Verhaegh K, Lipschultz B, Duval B P, Harrison R, Reimerdes H, Theiler C, Labit B, Maurizio R, Marini C, Nespoli F, Sheikh U, Tsui C K, Vianello N, Vijvers W A J and Team T T E M 2017 *Nuclear Materials and Energy* **12** 1112–1117 ISSN 2352-1791
- [20] Lipschultz B, Terry J L, Boswell C, Goetz J A, Hubbard A E, Krasheninnikov S I, LaBombard B, Pappas D A, Pitcher C S, Wising F and Wukitch S 1999 *Physics of Plasmas* **6** 1907–1916 ISSN 1070-664x
- [21] Verhaegh K 2018 *Spectroscopic Investigations of detachment on TCV* Thesis University of York URL <http://etheses.whiterose.ac.uk/22523/>
- [22] Lomanowski B, Carr M, Field A, Groth M, Henderson S, Harrison J, Huber A, Jarvinen A, Lawson K, Lowry C *et al.* 2019 *Nuclear Materials and Energy* **20**
- [23] Karhunen J, Holm A, Lomanowski B, Solokha V, Aleiferis S, Carvalho P, Groth M, Lawson K, Meigs A, Shaw A *et al.* 2022 *Plasma Physics and Controlled Fusion* **64** 075001
- [24] Verhaegh K, Lipschultz B, Bowman C, Duval B P, Fantz U, Fil A, Harrison J R, Moulton D, Myatra O, Wunderlich D, Federici F, Gahle D S, Perek A, Wensing M and and 2021 *Plasma Physics and Controlled Fusion* **63** 035018
- [25] Verhaegh K, Lipschultz B, Harrison J R, Duval B P, Bowman C, Fil A, Gahle D S, Moulton D, Myatra O, Perek A, Theiler C and Wensing M 2021 *Nuclear Materials and Energy* **26** 100922
- [26] Fil A M D, Dudson B D, Lipschultz B, Moulton D, Verhaegh K H A, Fevrier O and Wensing M 2017 *Contributions to plasma physics* **58** ISSN 0863-1042
- [27] Oliveira H D, Theiler C, Février O, Reimerdes H, Duval B, Tsui C, Gorno S, Oliveira D, Perek A and the TCV Team 2022 *Nuclear Fusion* **62** 096028 URL <https://dx.doi.org/10.1088/1741-4326/ac82fd>
- [28] Wensing M, Duval B, Fevrier O, Fil A, Galassi D, Havlickova E, Perek A, Reimerdes H, Theiler C, Verhaegh K and Wischmeier M 2019 *Plasma Phys. Control. Fusion* **61**
- [29] Verhaegh K, Williams A C, Moulton D, Lipschultz B, Duval B P, Fevrier O, Fil A, Osborne N, Reimerdes H and Theiler C 2023 Investigating the impact of the molecular charge-exchange rate on detached solps-iter simulations (*Preprint* 2301.11298)
- [30] Janev R K and Reiter D 2018 Isotope effects in molecule assisted recombination and dissociation in divertor plasmas Jülich report - juel 4411 Forschungszentrum Jülich GmbH Jülich english URL https://juser.fz-juelich.de/record/850290/files/J%C3%BC1_4411_Reiter.pdf?version=1
- [31] Williams A C 2022 Investigation of atomic and molecular rates in plasma-edge simulations through experiment-simulation comparisons URL <https://arxiv.org/abs/2205.12715>
- [32] Moulton D, Harrison J, Lipschultz B and Coster D 2017 *Plasma Physics and Controlled Fusion* **59** 065011 ISSN 0741-3335
- [33] Wijkamp T, Allcock J, Feng X, Kool B, Lipschultz B, Verhaegh K, Duval B, Harrison J, Kogan L, Lonigro N, Perek A, Ryan P, Sharples R, Classen I, Jaspers R and the MAST Upgrade team 2023 *Nuclear Fusion* **63** 056003 URL <https://dx.doi.org/10.1088/1741-4326/acc191>

- [34] Myatra O 2021 *Numerical modelling of detached plasmas in the MAST Upgrade super-X divertor* Ph.D. thesis University of York URL https://etheses.whiterose.ac.uk/29934/1/0Myatra_thesis.pdf
- [35] O'Mullane M 2013 Adas: Generalised collisional radiative data for hydrogen Tech. rep. ADAS URL <http://www.adas.ac.uk>
- [36] McLean A 2019 Understanding plasma divertor detachment in fusion power reactors Tech. rep. Lawrence Livermore National Lab.(LLNL), Livermore, CA (United States)
- [37] Groth M, Hollmann E, Jaervinen A, Leonard A, McLean A, Samuelli C, Reiter D, Allen S, Boerner P, Brezinsek S *et al.* 2019 *Nuclear Materials and Energy* **19** 211–217
- [38] Federici F, Reinke M L, Lipschultz B, Thornton A J, Harrison J R, Lovell J J and Bernert M 2023 *Review of Scientific Instruments* **94** 033502
- [39] Clark J G, Bowden M D and Scannell R 2021 *Review of Scientific Instruments* **92** 043545 (Preprint <https://doi.org/10.1063/5.0043813>) URL <https://doi.org/10.1063/5.0043813>
- [40] Clark J G, Bowden M D, Kim Y, Parry B, Rose E, Sarwar R and Scannell R 2022 *Review of Scientific Instruments* **93** 103534
- [41] Karhunen J, Holm A, Aleiferis S, Carvalho P, Groth M, Lawson K, Lomanowski B, Meigs A, Shaw A and Solokha V 2023 *Nuclear Materials and Energy* **34** 101314 ISSN 2352-1791 URL <https://www.sciencedirect.com/science/article/pii/S2352179122001958>
- [42] Feng Y, Frerichs H, Kobayashi M and Reiter D 2017 *Plasma Physics and Controlled Fusion* **59** 034006 ISSN 0741-3335 URL <http://stacks.iop.org/0741-3335/59/i=3/a=034006>
- [43] *Nuclear Fusion, to be submitted*
- [44] Wensing M, Loizu J, Reimerdes H, Duval B, Wischmeier M and the TCV team 2020 *Nuclear Fusion* **60** 054005
- [45] Perek A, Wensing M, Verhaegh K, Linehan B, Reimerdes H, Bowman C, van Berkel M, Classen I, Duval B, Février O, Koenders J, Ravensbergen T, Theiler C, de Baar M, the EUROfusion MST1 Team and the TCV Team 2022 *Nuclear Fusion* **62** 096012 URL <https://doi.org/10.1088/1741-4326/ac7813>
- [46] Ichihara A, Iwamoto O and Janev R K 2000 *Journal of Physics B: Atomic, Molecular and Optical Physics* **33** 4747–4758
- [47] Wischmeier M 2005 *Simulating divertor detachment in the TCV and JET tokamaks* Thesis EPFL
- [48] Chandra R, Holm A and Groth M 2023 *Nuclear Materials and Energy* **34** 101360 ISSN 2352-1791 URL <https://www.sciencedirect.com/science/article/pii/S2352179122002411>
- [49] Holm A, Wunderlich D, Groth M and Börner P 2022 *Contributions to Plasma Physics* **n/a** e202100189
- [50] Holliday M G, Muckerman J T and Friedman L 1971 *The Journal of Chemical Physics* **54** 1058–1072
- [51] Greenland P T 2001 The crmol manual: collisional-radiative models for molecular hydrogen in plasmas Jülich report juel-3858 Forschungszentrum Jülich GmbH URL https://juser.fz-juelich.de/record/24992/files/J%C3%BC1_3858_Greenland.pdf?version=1
- [52] Janev R K, Langer W D, Douglass Jr E *et al.* 1987 *Elementary processes in hydrogen-helium plasmas: cross sections and reaction rate coefficients* (Springer Science & Business Media)
- [53] Janev R K, Reiter D and Samm U 2003 *Collision processes in low-temperature hydrogen plasmas* vol 4105 (Forschungszentrum, Zentralbibliothek Jülich)
- [54] Celiberto R, Capitelli M and Cacciatore M 1990 *Chemical Physics* **140** 209–215 ISSN 0301-0104 URL <https://www.sciencedirect.com/science/article/pii/030101049087003T>
- [55] Harrison J, Fishpool G and Kirk A 2013 *Journal of Nuclear Materials* **438** S375–S378 ISSN 0022-3115 proceedings of the 20th International Conference on Plasma-Surface Interactions in Controlled Fusion Devices URL <https://www.sciencedirect.com/science/article/pii/S0022311513000822>
- [56] Stangeby P 2000 *The Plasma Boundary of Magnetic Fusion Devices. Series: Series in Plasma Physics, ISBN: 978-0-7503-0559-4. Taylor & Francis, Edited by Peter Stangeby, vol. 7* **7**