

UKAEA-CCFE-PR(25)355

K. K. Kirov¹, M. Lennholm¹, L. Piron^{2, 3}, D. Valcarcel¹
P. Almond¹, M. Baruzzo^{3, 4}, M. van Berkel⁵, T.
Bosman^{5, 6}, L. Ceelen^{5, 6}, P. Fox¹, L. Garzotti¹, B.
Kool^{5, 6}, C. Lowry¹, J. Mitchell¹, B. Sieglin⁷, H. Sun¹,
JET contributors*, the EUROfusion Tokamak

Exploitation Team**

Particle transport modelling for D/T ratio control experiments in JET

Enquiries about copyright and reproduction should in the first instance be addressed to the UKAEA Publications Officer, Culham Science Centre, Building K1/O/83 Abingdon, Oxfordshire, OX14 3DB, UK. The United Kingdom Atomic Energy Authority is the copyright holder.

The contents of this document and all other UKAEA Preprints, Reports and Conference Papers are available to view online free at scientific-publications.ukaea.uk/

Particle transport modelling for D/T ratio control experiments in JET

K. K. Kirov¹, M. Lennholm¹, L. Piron^{2, 3}, D. Valcarcel¹ P. Almond¹,
M. Baruzzo^{3, 4}, M. van Berkel⁵, T. Bosman^{5, 6}, L. Ceelen^{5, 6}, P.
Fox¹, L. Garzotti¹, B. Kool^{5, 6}, C. Lowry¹, J. Mitchell¹, B. Sieglin⁷,
H. Sun¹, JET contributors*, the EUROfusion Tokamak Exploitation
Team**

Particle transport modelling for D/T ratio control experiments in JET

K. K. Kirov¹, M. Lennholm¹, L. Piron^{2,3}, D. Valcarcel¹, P. Almond¹, M. Baruzzo^{3,4}, M. van Berkel⁵, T. Bosman^{5,6}, L. Ceelen^{5,6}, P. Fox¹, L. Garzotti¹, B. Kool^{5,6}, C. Lowry¹, J. Mitchell¹, B. Sieglin⁷, H. Sun¹, JET contributors* and the EUROfusion Tokamak Exploitation Team**

EUROfusion Consortium, JET, Culham Science Centre, Abingdon, OX14 3DB, UK.

¹ *United Kingdom Atomic Energy Authority, Culham Campus, Abingdon, Oxon, OX14 3DB, UK.*

² *Dipartimento di Fisica "G. Galilei", Università degli Studi di Padova, Padova, Italy,*

³ *Consorzio RFX, Corso Stati Uniti 4, 35127, Padova, Italy,*

⁴ *ENEA, Fusion and Nuclear Safety Department, C.R. Frascati, Rome, Italy, ENEA Frascati, C.P. 65, 00044 Frascati, Italy,*

⁵ *DIFFER—Dutch Institute for Fundamental Energy Research, De Zaale 20, 5612 AJ Eindhoven, The Netherlands*

⁶ *Department of Mechanical Engineering, Control Systems Technology Group, Eindhoven University of Technology, Eindhoven, The Netherlands*

⁷ *Max Planck Institute for Plasma Physics, Boltzmannstr. 2, 85748 Garching, Germany*

Abstract:


This study presents results from particle transport modelling for D/T ratio control experiments conducted during the JET DTE3 campaign. TRANSP interpretative and JETTO predictive simulations for D and T densities were performed and their results are discussed. Despite using simplified models based on Bohm-gyroBohm transport, the simulations incorporate self-consistent sources and impurities across the full radial range. The simplified models effectively reproduced the evolution of electron density and neutron rates. However, the predicted D/T ratio evolution responded to control requests faster than what was experimentally observed. Specific cases in which gas injections were swapped were also studied, and the corresponding simulation results are presented and analysed.

Introduction

Controlling the Deuterium/Tritium (D/T) ratio in future fusion experiments is crucial for optimising the fusion performance. DT fusion rate per unit volume dR_{DT}/dV is proportional to the densities of the reactants, n_D for D and n_T for T ions, as well as the averaged reactivity, $\langle \sigma.v \rangle$, i.e. $dR_{DT}/dV = n_D n_T \langle \sigma.v \rangle$. Figure 1 a) illustrates the sensitivity of the reaction rates to the D/T mixture for thermonuclear reactions as shown by dashed red lines. Ideally, the maximum thermonuclear fusion rate occurs for D/T ratio of 0.5/0.5. Furthermore, it is noteworthy that for D/T ratios between 0.4/0.6 and 0.6/0.4 the reduction in reaction rate is relatively small - approximately 4%. However, further imbalance, such as D/T ratio of 0.3/0.7, significantly impacts fusion performance, reducing the rate by 16%. A D/T ratio of 0.25/0.75, results in a 25% drop, highlighting the necessary of maintaining D/T close to 0.5/0.5 in future operations.

In most of the existing fusion reactors featuring Neutral Beam Injection (NBI), such as JET, a significant fraction of fusion reactions occurs through so-called Beam-Target (BT) collisions. As shown by the black line in figure 1 a), which represents dR_{DT}/dV for the sum of both thermal and BT reactions, it is evident that even in the case when BT reactions dominate over thermonuclear

ones, fusion performance is maximised at a specific D/T ratio, which is different from thermonuclear maximum at 0.5/0.5. For example, in the case shown in figure 1 a) the maximum performance for thermal and BT reactions occurs at approximately D/T~0.4/0.6. A similar trend is observed in figure 1 b), which depicts the measured total fusion rate under real experimental conditions. Maintaining this ratio would be highly desirable for optimising the overall fusion yield in this scenario.

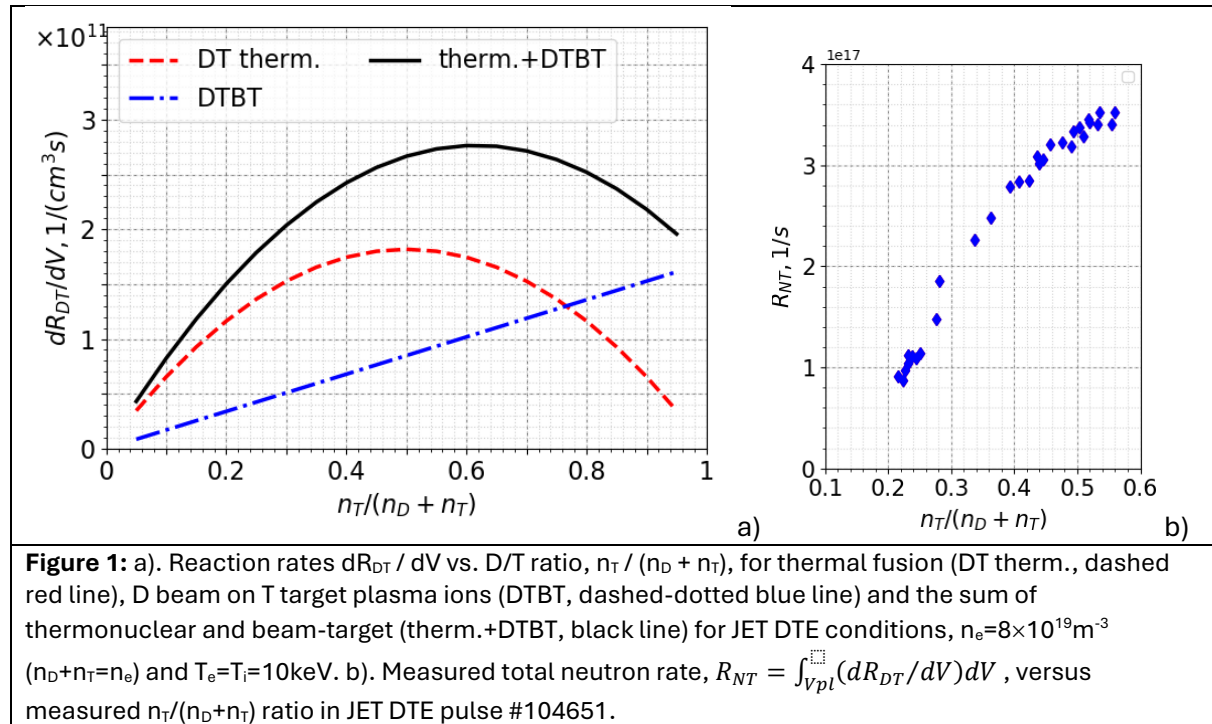

Recent JET DTE2 campaigns [1] have focused on developing scenarios with distinct characteristics in terms of confinement and operational space, including the baseline [2] and hybrid [3], [4] scenario as well as scenario dominated by BT rates, known as T rich [5]. Optimising D/T ratio was a key requirement for all these scenarios, necessitating additional experimental time. Notably, while the optimal D/T ratio for baseline remained close to 0.5/0.5, the T rich scenario required a significantly different D/T ratio of approximately 0.1/0.9 for optimal performance. Throughout these optimisation studies, it became evident that precise control of D/T ratio via feedback (FB) control could offer substantial benefits in improving the optimisation process.

One of the objectives of the JET DTE3 campaign was to develop real-time (RT) controllers for the future fusion reactors, with a particular focus on a reliable RT controller for D/T ratio control. For the first time, this campaign successfully demonstrated [6], [7], [8] active D/T ratio control using a feedback (FB) system. During these experiments, several challenges related to particle sources and transport were identified as crucial factors affecting the reliability of D/T control RT system. Addressing these issues is essential for improving the performance of the RT system. Similar challenges are expected in near-future fusion machines such as ITER [9], [10] and SPARC [11] as well as in more advanced projects like DEMO [12] and STEP [13], [14].

Fuelling thermonuclear plasma with D and T reactants can be modelled in a fluid approximation by the well known transport codes e.g. JETTO [15], TRANSP [16]. These codes incorporate all the essential building block: particle sources and losses, particle transport and fusion reactions.

Various contributions to D and T density profiles arise from transport processes like conduction and convection as well as particle sources and sinks. Additionally, fusion reactions should be accurately accounted for, as they contribute to D and T losses, He ash accumulation and plasma heating by alphas. Particle transport has been intensively studied [17], [18], [19], [20]. Regarding particle sources, there are three primary methods for fuelling fusion plasma: gas puff and recycling, NBI and pellet injection. These methods differ significantly in terms of spatial and energy distribution of the particle sources. Gas injection modules are placed at various points along the plasma periphery. The gas they inject is ionised near the plasma boundary and, through processes such as advection and inward pinch D/T ions penetrate into hot plasma core. In contrast, pellets provide more deep particle deposition. NBI involves injecting energetic neutral particles deep into the plasma core, where they are ionised and converted into fast ions that slow down to energies of the order of the ion temperature, thereby supplying continuous source of thermal ions in the core.

A better understanding of the sources and particle transport is essential for effective DT ratio control. Future reactors will require accurate estimates of these sources and transport coefficients to optimise fuelling and enable corrective actions when necessary. The peripheral particle sources provided by gas injection and pellets, rely on transport processes to deliver D and/or T ions to the plasma core. The time constants of these processes are of the order of particle confinement times, ranging from several hundred milliseconds to few seconds, which makes D/T ratio control on fast timescales particularly challenging. It is also possible that edge transport barrier in H-mode plasmas could significantly limit the fuelling efficiency of gas injection modules, reducing the penetration of edge ions in the core. In contrast, pellets provide direct penetration into the plasma, which means the time scales of typical D/T ratio control would generally need to be faster in this case. Different particle sources exhibit varying characteristic times for central penetration. As a result, more sophisticated D/T ratio controllers in the future will need to account for these time characteristics when setting RT feedback parameters.

The aim of this study is to assess whether simplified transport models reasonably predict the behaviour of real time D/T ratio controllers. Specifically, we use a simplified approach to model D/T ion transport, relying on the well known semi-empirical Bohm-gyroBohm (BgB) transport in a coupled, self-consistent, source driven full radius model. The importance of D/T ion sources and sinks has been emphasised and efforts have been made to model these as accurately as possible under experimental conditions. Predicting the thermal energy transport is not included in this study, as electron and ion temperature are assumed to be available from measurements. While this assumption might seem inconsistent with full self consistent simulations across all transport channels, it is deemed sufficient for the purposes of RT control testing simulator. Indeed, there is no reason to believe that future RT control tools will not be able to process temperature data as input. After demonstrating the applicability of these simplified models, they can be used to numerically investigate key issues related D/T ratio control. These include (i) the impact of different particle sources on D/T ratio control and (ii) determining which inputs to the RT controller – such as gas injection rates, the measured D/T ratio, neutron yield or combinations of these – are best suited for use in DT ratio control schemes.

This paper presents the results of particle modelling for D/T ratio control experiments conducted on JET during DTE3 campaign. The main conclusion from this study is that predictive modelling codes can be successfully applied to model the physics of particle transport for the

future D/T ratio control experiments. This paper is organized as follows: Section 1 details the codes used in the study and outlines key aspects of the analysis. Section 2 describes the experimental setup, the diagnostics employed, and a brief summary of the pulses in the D/T ratio control experiments. Section 3 presents the results of the modelling analysis, while Section 4 concludes the paper with a summary of key findings.

Details of modelling analysis

Description of the numerical tools used in the study

The TRANSP [16] code was used in the analysis presented here owing to its accurate prediction of NBI sources and fusion rates. Neutral beam deposition and fuelling in TRANSP were calculated by NUBEAM code [21] which is a computationally comprehensive Monte Carlo code for NBI heating in tokamaks. Gas injection modelling in TRANSP is performed by means of FRANTIC code [22].

Routine predictive transport modelling at JET is usually performed with the JETTO code [15], [23] coupled to PENCIL [24], [25] or ASCOT [26] package for computing NBI power and particle sources. Various transport models can be used in JETTO based on first principles physics or empirical scaling. A distinctive semi-empirical model which gives reasonable agreement with a large proportion of JET experimental data is the Bohm-gyroBohm model [27], which uses combination of Bohm and gyro-Bohm terms in the heat diffusivity expression. Gas injection in JETTO is modelled by FRANTIC code [22], although JETTO implementation is different from TRANSP. Pellet modelling in JETTO can be done by means of one of the available three models: continuous pellets [28], Neutral Gas and Plasma Shielding (NGPS) model [29] and HPI2 model [30].

One significant advantage in using JETTO in our studies is its well developed feedback control capabilities [28]. The implementation of a new feedback control scheme based on D/T ratio optimisation can be seamlessly integrated into JETTO. Therefore, once the code's ability to model the experiments is validated, which is the main goal of this study, we can propose upgrades to incorporate D/T ratio control.

Factors influencing D/T ratio control

An essential part of the analysis involves modelling transient phases during which D and T sources undergo significant modification. The transition to a different mixture ratio, along with the associated transient events, presents a challenging task that require careful consideration of particle sources and transport. Currently, most well established particle transport models focus on steady-state phases of experiments [31], [32], [33] while research on the fuel mixing process and transient events [20], [34], [35], remains in its early stages.

The analysis must also incorporate transport in the edge pedestal and account for gas injection rates. These additional requirements introduce further complexity compared to previous modelling efforts, which focus solely on core transport while overlooking pedestal dynamics, sources and gas introduction physics [32], [33]. The importance of the pedestal in understanding the mixing of hydrogenic isotopes in plasma was recently highlighted in [36], [31].

Understanding particle sources and transport is crucial in this analysis. Therefore, a brief summary of recent advances in this field is presented here.

Particle transport: core fluxes and edge barrier

Core particle transport has been extensively documented in numerous publications, including but not limited to [9], [10], [17], [37], [38], [39]. Over the years, extensive JET studies have also been conducted and published [18], [19], [20], [31], [40], [41]. The key conclusion from these studies is that particle transport on JET is predominantly anomalous and driven by ITG turbulence.

Summarised in a simplified form, the cross field diffusion coefficient, D , and heat diffusivity, χ , for drift-wave turbulence scales as [42] $D \sim \chi \sim \Delta_r^2 / \delta t$ where the turbulence characteristic time scale is given by $\delta t \approx L_\theta / v_d \approx L_\theta / (T / e Z B L_r)$. Here, L_θ represents the poloidal scale length, v_d is the drift velocity and L_r corresponds to the radial profile gradient length for density, L_n , or temperature, L_T . The term, Δ_r , in the expression above denotes the characteristic turbulent radial scale length. This leads to the transport coefficients $D \sim \chi \sim (T / e Z B) \Delta_r^2 / L_\theta L_r$. Depending on how the turbulent radial scale length Δ_r is assessed, different diffusion models arise: (i) Bohm type diffusion occurs when Δ_r scales with the plasma size, i.e. the minor radius $\Delta_r \sim a$, or (ii) gyro-Bohm type of diffusion occurs when Δ_r is proportional to the ion Larmor radius, i.e. $\Delta_r \sim \rho_i$. The Bohm and gyro-Bohm models [27] implemented in JETTO provide estimates for electron and ion heat diffusivities as follows:

$$\chi_e = \chi_{e,B} + \chi_{e,gB}, \chi_i = \chi_{i,B} + \chi_{i,gB} \quad (1)$$

where:

$$\chi_{e,B} = \alpha_B \frac{a}{B_t L_{pe}} \frac{T_e}{q^2} \left(\frac{T_e(\rho_{int}) - T_e(\rho_{ped})}{T_e(\rho_{ped})} \right); L_{pe} = \frac{p_e}{|\partial p_e / \partial \rho|}; \alpha_B = 8 \times 10^{-5}; \chi_{i,B} = 2\chi_{e,B} \quad (2)$$

$$\chi_{e,gB} = \alpha_{gB} \frac{T_e^{1/2}}{B_t^2 L_{T_e}} \frac{T_e}{q^2}; L_{T_e} = \frac{T_e}{|\partial T_e / \partial \rho|}; \alpha_{gB} = 5 \times 10^{-6}; \chi_{i,gB} = 0.5\chi_{e,gB} \quad (3)$$

and the non-local factor $\left(\frac{T_e(\rho_{int}) - T_e(\rho_{ped})}{T_e(\rho_{ped})} \right)$ is calculated at the foot of the pedestal ρ_{ped} near plasma boundary and at ρ_{int} which is about 0.1m inside ρ_{ped} . The particle diffusion coefficients for D and T ions can be defined as proportional to the heat diffusivities, using two coefficients to specify values at the axis and the edge [18], [63]:

$$D_j = \xi_j(\rho) \frac{\chi_e \chi_i}{\chi_e + \chi_i}, \xi_j(\rho) = A_{j,1} + (A_{j,2} - A_{j,1})\rho, \quad (4)$$

where $j=D, T$ and $A_{j,1}, A_{j,2}$ are constants that can be independently assigned for D and T species. The pinch velocity can be set up proportional to D_j or $D_j \nabla T_i / T_i$:

$$\Gamma_j^{inw} = \alpha_i^{inw} \frac{D_j S^2}{v' v} n_j \text{ or } \Gamma_j^T = \alpha_i^T D_j \frac{\nabla T_i}{T_i} n_j \quad (5)$$

where the latter expression accounts for the thermo-diffusion contribution to particle pinch. The mixed Bohm-gyroBohm model has been extensively tested on large number of devices and different scenario in both L-mode and H-mode plasma [18], [27], [62], [63]. In the current version of the JETTO code, conductive particle transport for D and T ions can be configured separately through the coefficients $A_{j,1}$ and $A_{j,2}$. However, the convective particle flux coefficients cannot be specified independently for D and T ions, as only a single coefficient

α_i^{inw} or α_i^T is available to control the fluxes Γ_j^{inw} or Γ_j^T . In the studies discussed here notations A_1, A_2 will be used for the cases when same particle transport coefficients for D and T ions are used, i.e. $A_{D,1} = A_{T,1} = A_1$ and $A_{D,2} = A_{T,2} = A_2$.

As seen from Eqs. (2) and (3), several factors influence the transport of D and T ions. The pedestal height, a/L_{pe} , a/L_{Te} all play a role in determining transport behaviour. Additionally, there is an implicit dependence on plasma composition mass through $\chi_{e,gB} \propto M^{1/2}$. In our studies the normalised gradient lengths vary between 5% and 15% for a/L_{pe} and 5%-20% for a/L_{Te} , see table 1. For the JET pulses discussed here, which are dominated by ITG turbulence, gyro-Bohm scaling with mass is expected in the collisionless limit. However, several mechanisms — such as collisions, ExB shear flow, and other turbulence regulation processes — can alter the mass dependence of transport coefficients, potentially deviating from the gyro-Bohm scaling.

A crucial aspect of our analysis is understanding the physics governing particle transport, particularly potential differences in D and T ion fluxes in a mixed D/T plasma. This issue is further emphasized by the fact that while a vast database of pure D plasma experiments exists, relatively few experiments have been conducted with D/T mixtures.

The primary challenge in analysing heat and particle transport in mixed D/T plasma lies in determining how transport scales with plasma composition mass. The dependence of transport coefficients — and consequently, confinement — on the effective mass $M_{eff} = (2 \cdot n_D + 3 \cdot n_T) / (n_D + n_T)$ is often referred to as isotope effects. In our studies, varying the D/T ratio from $D/T \sim 0.77/0.23$ to $0.44/0.56$ (see table 1) increases the effective mass from $M_{eff} = 2.23$ to 2.56 , an increase of approximately 15%. This relatively small increase in M_{eff} observed in D/T ratio control experiments is unlikely to significantly impact thermal confinement if one considers the IPB98(y,2) scaling law [9], $\tau_E^{th} \propto M_{eff}^{0.2}$. Under this scaling, the expected deviation in τ_E^{th} is less than 3%. However, a major challenge arises due to the lack of consensus among different studies regarding the exact exponent α_M in the $M_{eff}^{\alpha_M}$ scaling of τ_E^{th} . Experimentally results from TFTR suggest $\alpha_M = 0.89 \pm 0.20$ [43], whereas early JET experiments indicate an even negative exponent, $\alpha_M = -0.25 \pm 0.22$ [44], for the global confinement time and $\alpha_{M,core} = -0.16 \pm 0.1$ for the core energy confinement after separating core and pedestal energies. Similar scaling has been predicted by TGLF-SAT2 modelling of JET DTE2 pulses [31].

In general, core-edge coupling must be considered in cases where pedestal parameters are evolving. A key example of this nonlinear interaction occurs when improved core confinement leads to an increase in pedestal pressure. This, in turn, can influence edge stability through the well-known β stabilization of peeling-ballooning modes, ultimately modifying pedestal parameters.

SOL and sources

Accurate modelling of gas injection from gas-injecting modules requires proper treatment of Scrape-Off Layer (SOL) physics. On JET, this can be achieved using the 2D SOL code EDGE2D [45], which solves the 2D fluid equations for the conservation of energy, parallel momentum, and particle transport in the plasma edge region. The model includes ions, electrons, and all ionization stages of multiple species, while gas injection sources can be defined on a discrete poloidal mesh. To simulate interactions with vessel walls, EDGE2D is coupled with the Monte Carlo code EIRENE [46] which provides neutral ion sources from recycling and gas injection, as well as impurity sources from sputtering. The neutral source profiles generated by EDGE2D can

be directly input into JETTO, enabling fully self-consistent plasma-SOL modelling via the 2D Monte Carlo neutral code EIRENE within the COCONUT workflow [47].

In JETTO, neutral sources can be modelled using either the FRANTIC or EIRENE codes. While EIRENE offers a more advanced treatment of neutrals based on the Monte Carlo (MC) technique, with the added benefit of poloidally localized source definitions, its current implementation in JETTO does not support operation in multi-species plasmas when coupled with SANCO. On the other hand, FRANTIC provides a more simplified approach. Although it lacks the ability to resolve 2D neutral sources in the Scrape-Off Layer (SOL), it can still deliver reasonably accurate neutral sources at the separatrix and within the edge region. However, FRANTIC's consistency with experimental gas injection rates is somewhat limited. Our findings indicate that, in general, gas injection fluxes lower than measured values need to be specified, and the neutral temperature must be set lower than the separatrix temperature for FRANTIC to produce realistic gas injection source profiles.

In this manuscript, we consider three primary fuelling sources: gas injection, Neutral Beam Injection (NBI), and pellets. Figure 2 illustrates the estimated magnitudes of these sources. The NBI source, figure 2 a), is centrally located but contributes relatively little to fuelling, being at least an order of magnitude lower than both gas injection, figure 2 b), and pellet injection, figure 2 c). The latter two sources, being predominantly peripheral, experience reduced transport in the Edge Transport Barrier (ETB) region. In cases of a strong ETB, gas fuelling can become almost negligible due to suppressed edge transport. However, in the pulses examined in this study, the pedestal barrier is not particularly strong, allowing gas injection modules to provide a reasonable fuelling contribution.

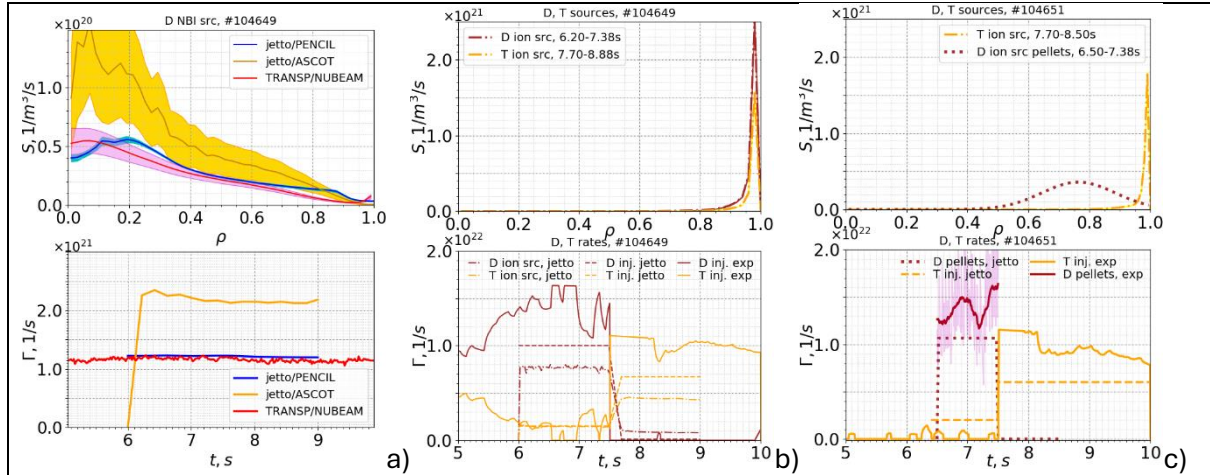


Figure 2: a) D ion sources due to NBI for JET pulse #104649 averaged (solid line) and their evolution shown by one standard deviation (shaded area) over high performance time interval. JETTO simulations between 6.5-8.5s are shown for PENCIL (blue) and ASCOT (orange) codes, while TRANSP predicted D ion source in 4-11s interval are from NUBEAM code (red). Profiles are shown in the top graph while time evolution of the total source integrated over plasma volume is shown at the bottom. b) D and T ion sources due to gas injection for JET pulse #104649. c) D and T ion sources due to D pellets (dotted brown lines) and T gas injection (orange lines) for JET pulse #104651. In b) and c) particle sources by JETTO code are again shown in the top, while volume integrated sources are shown at the bottom graphs. Total ion sources (dash-dotted lines) for D (brown) and T (orange), and gas puff used in JETTO/FRANTIC (dashed lines) are compared to real gas injection rates (solid lines).

Simplifications adopted in analysis

In proposed analysis the thermal transport is not modelled. However, this limitation should not pose a significant issue for the development of real-time (RT) D/T ratio controllers, as direct measurements of electron and ion temperatures can be readily incorporated into future RT control schemes. For instance, JET already employs central T_e measurements in various RT control algorithms, such as T_e hollowness in hybrid pulses [3], [4]. While implementing ion temperature measurements in RT controllers may be more challenging, several studies have demonstrated that T_i can be scaled from T_e measurements. Future RT D/T ratio control schemes would take inputs such as $X[T]$ (or $X[D]$), n_e , T_e , potentially T_i , the input heating power, and/or R_{NT} . With these real-time signals available, rapid calculations can be performed to determine the necessary D/T ratio adjustments for optimizing fusion performance.

RT controllers cannot rely on comprehensive transport models due to the computational complexity of the latter. Even the simplest transport models would be impractical for RT implementation, as they would introduce unnecessary delays and uncertainties. Instead, direct measurements provide a far more accurate and faster input for RT control schemes. A very simplified real time models constrained by comparison to limited available measurements is likely to be the way forward.

In the cases studied here, pedestal pressure remains unchanged during variations in the D/T ratio, allowing us to treat the core and the edge independently. JETTO uses an empirical model that incorporates a prescribed Edge Transport Barrier (ETB) width and multiplication coefficients (scale factors) to account for reduced transport in the barrier region. The width of the transport barriers is inferred from High-Resolution Thomson Scattering (TS) [48] measurements, while the multiplication coefficients are adjusted to ensure that the modelled pedestal height matches the experimental data. Furthermore, particle diffusion is enhanced during Edge Localized Modes (ELMs) to simulate the expulsion of heat and matter associated with ELM events. In our analysis, this is achieved using a continuous ELM model, where nominal values of density and temperature at the Top of the Pedestal (TOP) are prescribed.

Ideally, one would model SOL physics and edge sources using the EDGE2D/COCONUT workflow. However, this approach is not used in the present analysis for the following reasons:

- Complexity of Setup and Processing: The process of setting up EDGE2D/COCONUT, running the codes, and processing the results is quite complex. Given that the primary goal of this study is to assess whether simplified transport models reasonably predict the behaviour of real time D/T ratio controllers, it was determined that the benefits of using EDGE2D/COCONUT for obtaining consistent gas injection sources would be minimal in comparison to the effort involved.
- Suitability for RT Control Schemes: The complexity of these calculations makes them unsuitable for real-time (RT) control schemes, which require much quicker computations. The primary focus of the analysis is to develop a practical approach that can be implemented in RT control systems, which is why a more straightforward method using FRANTIC is employed.

In this analysis, FRANTIC is used to model gas injection. FRANTIC works in 1D geometry and assumes that the gas injection is poloidally equally distributed, which simplifies the modelling. As mentioned earlier, the gas injection rates provided to FRANTIC, figure 2 b) and c), are slightly lower, 20%-40%, than the measured D and T gas puff rates.

Experimental setup

Diagnostics

Experimental data from standard JET diagnostics and recommended signals were used in the analysis. Electron density and temperature profiles were obtained from the high resolution Thomson Scattering (TS) diagnostics [48]. Radiated power was measured by bolometric diagnostics [49], while the effective charge state of the plasma, Z_{eff} , was assessed by means of Bremsstrahlung measurements with visible spectroscopy. Neutron production counts, R_{NT} , were taken from the available neutron yield monitors [50], [51]. Ion temperature T_i for the investigated pulses is obtained from the Charge eXchange (CX) recombination spectroscopy diagnostic [52].

In general JET is equipped with two diagnostics to measure the Hydrogen isotopes: High Resolution Spectroscopy (HRS) data [53], [54], [55] and mass spectrometer in the exhaust line [56]. The HRS diagnostic Line-Of-Sight (LOS) are shown in figure 3 a). The diagnostic provides the ratio of H, D and T neutrals to total amount of hydrogenic species as weighted average along diagnostic LOSs covering a particular section in the SOL near the X point, noted in general by r_x . These measurements are typically represented by signals of the form: $n_D(t, r_x) / (n_H(t, r_x) + n_D(t, r_x) + n_T(t, r_x))$. The measurement includes both hydrogenic neutrals from gas injection and sources due to recycling. Assuming negligible H, $n_H \sim 0$, which holds for all experiments discussed here, the following notations $X[D]_x = n_D(t, r_x) / (n_D(t, r_x) + n_T(t, r_x))$ and $X[T]_x = n_T(t, r_x) / (n_D(t, r_x) + n_T(t, r_x))$ are adopted to distinguish between HRS measured and calculated D/T ratios. The volume averaged D/T ratios, derived from calculations, will be noted by $\langle X[D] \rangle = \langle n_D \rangle / \langle n_D + n_T \rangle$, $\langle X[T] \rangle = \langle n_T \rangle / \langle n_D + n_T \rangle$. Here, the angle brackets notation ($\langle \rangle$) indicate that these ratios are volume-averaged quantities, highlighting the distinction between the measurements and the averaged values used in the analysis. Similarly the notations $X[D]_E$ and $X[T]_E$ will be used for the data obtained from the mass spectrometer at the exhaust. Due to the difference in locations where measurements are performed, the two diagnostics discussed here, HRS and mass spectrometer in the exhaust line, are in general incompatible. Specifically, the mass spectrometer provides data from the exhaust, which, in the best-case scenario, is time-delayed relative to the actual mixture content in the plasma. For this reason, RT system in JET relies on HRS data, as it provides more realistic and timely measurements of the plasma composition compared to the mass spectrometer.

The LOS of HRS diagnostic is shown in figure 3 a) by cyan lines for 1.4MA/1.7T JET pulse #104651 at 7.4s. In red shown are the lines of NBI injected beams, while in black indicated is the pellet HFS injection line.

Gas injection in JET can be carried out by using various gas injection modules, with D and T injection being separated as dedicated modules are used for T injection. In our studies both D and T were injected from modules situated at the midplane on the low field side, figure 3 a). The amount of injected gas is calibrated [57] to ensure accurate fuelling. Additionally, the pellet injection line, which launches D pellets on the Vertical High Field Side (VHFS), is also shown in figure 3 a).

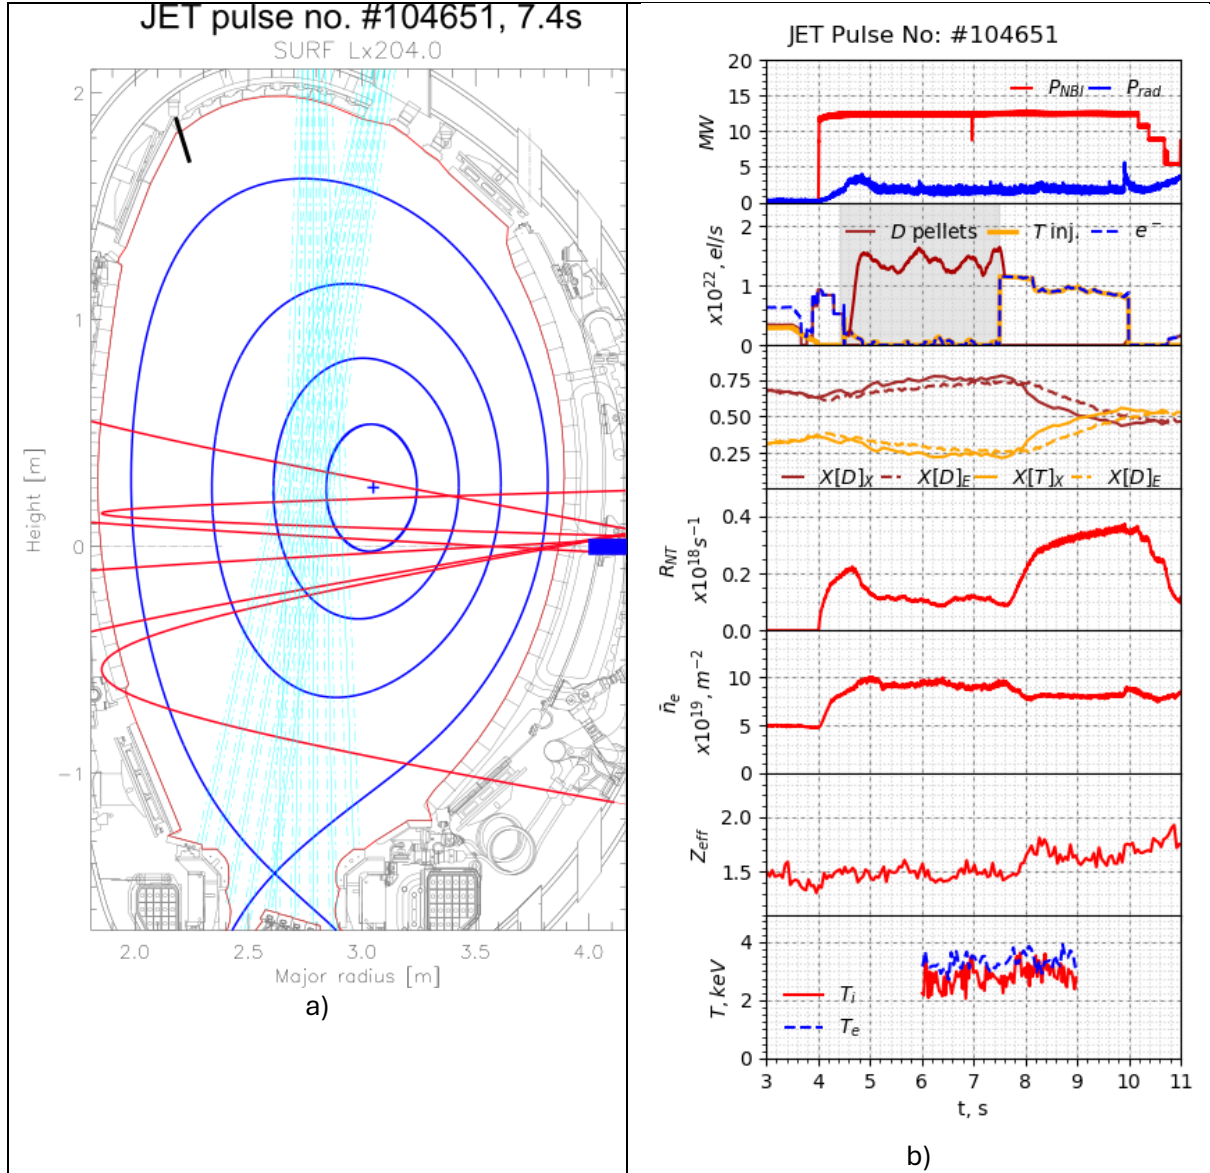


Figure 3: a) Plasma cross-section of 1.4MA/1.7T JET pulse #104651 at 7.4s. NBI injectors 1 to 6 used in this experiment are shown in red, while the pellet VHFS injection line is indicated in black. The LOS of HRS diagnostic providing the data for D/T ratio is shown in cyan. Gas injection modules used in this study are located at the LFS midplane, approximate location is shown by a blue rectangle. Time traces of investigated 1.4MA/1.7T JET pulse #104649 in which D/T ratio was varied by means of D/T gas injection are shown in b). From top to bottom shown are traces of applied NBI power (red), P_{NBI} , and radiated power (blue), P_{rad} ; pellet source of D (brown) and gas injection rates for T (orange) and electrons (blue). The time interval in which D pellets were injected is shown by greyed area. Measured D/T ratio by HRS is given on third graph by $X[D]_X$ (red solid line) and $X[T]_X$ (orange solid line), while exhaust measurements $X[D]_E$ and $X[T]_E$ are shown by dashed lines. Neutron yield, R_{NT} , line integrated electron density, $\bar{n}_e$, effective charge, Z_{eff} , core electron temperatures (blue), T_e , and ion (red), T_i , temperatures are provided as well.

To assess the capability of the modelling tools used in this study, the predicted data are validated against the measurements. This validation is typically straightforward for electron densities and temperatures. However, in our studies, we model n_D and n_T , which do not directly translate into electron density. As long as the composition and impurities are modelled accurately, it can be argued that electron density can be used to validate our predictions.

Additionally, as discussed in the introduction, neutron rates are highly sensitive to the D/T ratio, so these measurements can also serve to further validate the analysis.

In cases where the model output does not directly correspond to the measured data, a synthetic diagnostic can be constructed from the model. This synthetic diagnostic would correspond to a particular measurement by generating data that mirrors the diagnostic in question. For example, if SOL physics can be modelled in a 2D geometry to track the D/T isotopes transport and their recycling into the divertor region, one could perform line averaging along the HRS Line of Sight (LOS) for D/T neutral fluxes, which would then correspond to the measured data from the HRS diagnostic. Matching the data between this synthetic diagnostic and the HRS measurements could provide an indication of the quality of the modelling. Unfortunately, this approach was not feasible in our studies. 2D modelling of the SOL is complex and requires additional data, making it difficult to apply. The use of simpler codes, such as the 1D FRANTIC code to model neutral fluxes, further limits the possibility of creating a synthetic diagnostic for comparison with HRS data.

JET DTE pulses

A series of dedicated pulses were developed and conducted on JET during the DTE3 campaign, in which the D/T ratio controller was tested under fully operational conditions [6], [7], [8]. The details of these pulses, including the requested and achieved D/T ratios, are provided in Table 1, along with the quantities that influence particle transport. For the pulses of interest, #104649 and #104651, the data is presented for two distinct time intervals: the first interval, during the phase of reaching D-rich plasma, while the second at the end of the phase, when a D/T ratio of 0.4/0.6 was requested. In all cases of interest, $a/L_{ne} \ll a/L_{Ti}$, meaning that particle transport and energy transport are primarily dominated by ITG turbulence. This indicates that the transport processes are more sensitive to ion temperature variations than to electron density gradients, and ITG turbulence plays a key role in governing the overall transport behaviour in these scenarios.

Table 1: Details of D/T ratio control pulses. Requested and achieved D/T ratios during early D rich and late D/T equilibration phases of the pulses are shown. T_i/T_e , density and normalised ion temperature gradient lengths and effective collisionality v_{eff} [58] at $\rho=0.5$ are listed as well. Note that the a/L ratios are derived from JETTO runs. This means that a/L_{ne} is reliable only when the modelled n_e closely matches the measured data. The a/L_{Te} values are relatively accurate, as T_e is fitted to experimental data, whereas a/L_{Ti} is less precise due to the coarse mesh in T_i measurements, see figure 4 b).

pulse	phase	D/T target and achieved ratio as measured by HRS at time t[s]	D/T RT control sources	T_i/T_e , a/L_{ne} , a/L_{pe} , a/L_{Te} , a/L_{Ti} , v_{eff} at $\rho=0.5$ at time t[s]
#104648	phase 1, 4.5-7.5s	D/T~0.7/0.3 D/T~0.75/0.25, at 7.45s	D by gas injection; T by gas injection	
	phase 2, 7.5-10s	D/T~0.4/0.6 D/T~0.5/0.5, at 10s	D by gas injection; T by gas injection	
#104649	phase 1, 4.5-7.5s	D/T~0.7/0.3 D/T~0.8/0.2, at 7.45s	D by gas injection; T by gas injection	$T_i/T_e \sim 0.90$, $a/L_{ne} \sim 0.52$, $a/L_{pe} \sim 3.04$, $a/L_{Te} \sim 2.53$, $a/L_{Ti} \sim 1.20$ $v_{eff} \sim 1.5$ at 7.43s (from JETTO run)
	phase 2, 7.5-10s	D/T~0.4/0.6 D/T~0.47/0.53, at 10s		$T_i/T_e \sim 1.02$, $a/L_{ne} \sim 0.45$, $a/L_{pe} \sim 2.86$, $a/L_{Te} \sim 2.42$, $a/L_{Ti} \sim 2.14$ $v_{eff} \sim 0.95$ at 8.88s (from JETTO run)
#104650	phase 1, 4.5-7.5s	D/T~0.7/0.3 D/T~0.75/0.25, at 7.45s	D by pellets;	

	phase 2, 7.5-10s	D/T~0.4/0.6 D/T~0.44/0.56, at 10s	T by gas injection	
#104651	phase 1, 4.5-7.5s	D/T~0.7/0.3 D/T~0.77/0.23, at 7.45s	D by pellets;	$T_i/T_e \sim 1.00$, $a/L_{ne} \sim 0.29$, $a/L_{pe} \sim 2.76$, $a/L_{Te} \sim 2.47$, $a/L_{Ti} \sim 2.79$ $v_{eff} \sim 1.5$ at 7.43s (from JETTO run)
	phase 2, 7.5-10s	D/T~0.4/0.6 D/T~0.44/0.56, at 10s	T by gas injection	$T_i/T_e \sim 1.09$, $a/L_{ne} \sim 0.34$, $a/L_{pe} \sim 2.41$, $a/L_{Te} \sim 2.07$, $a/L_{Ti} \sim 1.71$ $v_{eff} \sim 1.0$ at 8.50s (from JETTO run)

In these 1.4MA/1.7T pulses heated with ~12MW of D NBI power the plasma was initially fuelled with D neutral gas either by gas injection, figure 4 a), or pellets, figure 3 b), so that D/T ratio has been forced to increase to about $D/T \sim 0.8/0.2$. This D rich plasma was achieved via RT control of D and T gas in response to the requested reference values during the initial period 4.5-7.5s of high performance H-mode phase, see table 1. This is shown in figure 4 a) for #104649 with D gas injection rates of $\sim 1.3e22$ el/s (red line in second graph) and in figure 3 b) for #104651 where pellets (grey area in second graph) were injected from about 4.5s until 7.5s. In this case small 1.7mm pacing pellets with radius of 1mm were injected with rate of about 40 pellets per second. The RT controller was then programmed to adjust the D/T ratio to a more favourable mix, such as around 0.4/0.6. The requested and achieved D/T ratios during these experiments are provided again in Table 1. Signals from the HRS on D and T ion ratios, $X[D]_x$ and $X[T]_x$, were used as inputs for the feedback controller in the described RT algorithm. Time traces of D/T ratio for the two pulses, one fuelled with D gas injection and the other by D pellets, are shown on third graph in figure 4 a) and 3 b). To achieve the requested equipartition of the D/T ratio, the RT algorithm acted on D source by stopping it and enabling the T source. Specifically, in pulse #104649 (gas injection) and pulse #104651 (pellets), the D injection was stopped at 7.5s, and shortly after, T gas injection began at a rate of approximately $1.1e22$ el/s. As a result of this adjustment, the D/T ratio reached approximately 0.5/0.5, responding to the RT control request with a delay of about 1-1.5s. This change in the D/T ratio led to an improvement in fusion performance, as indicated by the R_{NT} time traces shown in figure 3 b) and figure 4 a), while electron density, temperatures, and Z_{eff} remained unchanged.

The time constants, which represent the rate of exponential changes in $X[D]_x$ and $X[T]_x$ signals, as well as the R_{NT} signals, are an important aspect of these studies and are briefly discussed here. In pulse #104649, where gas-injected D is used, the time constants for the D/T ratio signals, $X[D]_x$ and $X[T]_x$, are approximately equal to the time constant of the neutron yield, R_{NT} , with all three being between 0.94s and 0.96s, as shown in figure 4 a). In the pellet-fuelled pulse #104651, the time constants for $X[D]_x$ and $X[T]_x$ are similar, around 0.89s. However, the fusion yield changes on a much quicker timescale, with a time constant of 0.51s, as shown in figure 3 b). This indicates that the fusion yield responds faster than the D/T ratio signals in the pellet-fuelled pulse.

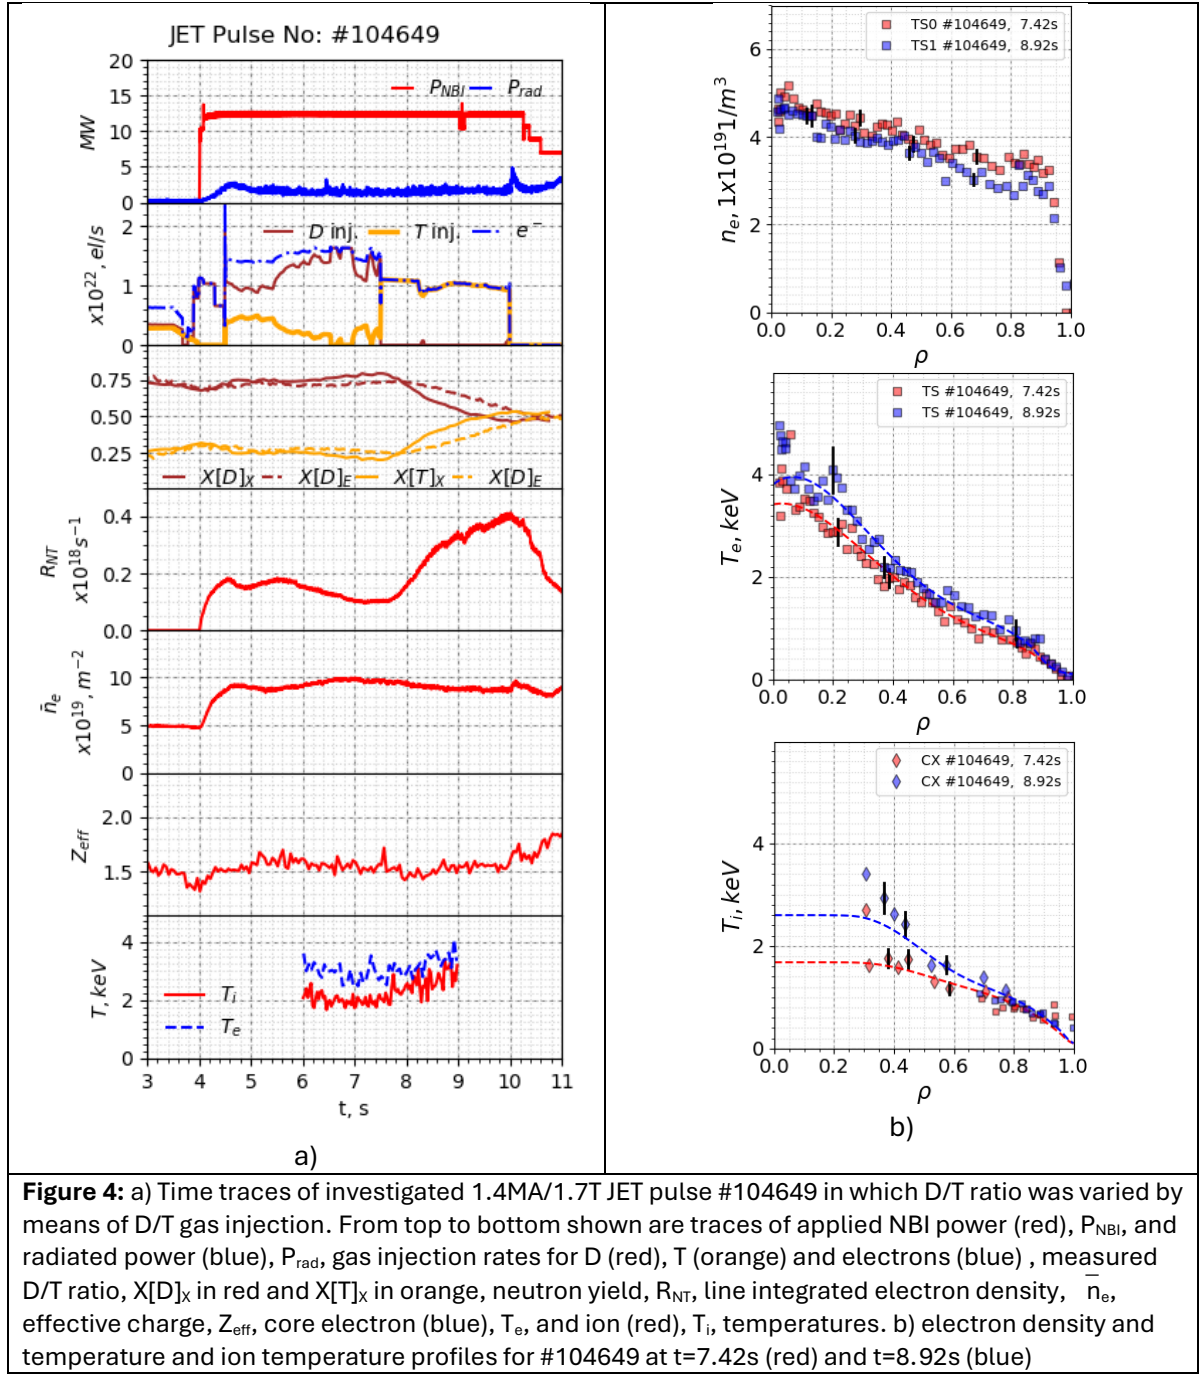


Figure 4: a) Time traces of investigated 1.4MA/1.7T JET pulse #104649 in which D/T ratio was varied by means of D/T gas injection. From top to bottom shown are traces of applied NBI power (red), P_{NBI} , and radiated power (blue), P_{rad} , gas injection rates for D (red), T (orange) and electrons (blue), measured D/T ratio, $X[D]_X$ in red and $X[T]_X$ in orange, neutron yield, R_{NT} , line integrated electron density, $\bar{n}_e$, effective charge, Z_{eff} , core electron (blue), T_e , and ion (red), T_i , temperatures. b) electron density and temperature and ion temperature profiles for #104649 at $t=7.42s$ (red) and $t=8.92s$ (blue)

The electron density, electron temperature, and ion temperature profiles for two time slices—at the end of the D-rich phase, at 7.42s, and during the equipartition phase with a D/T~0.5/0.5 ratio, at 8.92s, are shown in figure 4 b).

While there are some changes in the profiles, particularly in ion temperature, T_i , the pedestal stored energy only changes by about 11%. This supports the approach used in the study, where the pedestal and the core are modelled independently, with the neglect of core/edge coupling being a reasonable approximation for the given scenarios.

Results from the analysis

In the following section the results from interpretative TRANSP runs and predictive JETTO analysis are presented and validated versus the experimental data: total neutrons count, R_{NT} , $X[T]_X$ signal from HRS and electron density profile evolution.


Interpretative TRANSP simulations

TRANSP was run fully interpretatively, incorporating electron density and temperature from TS measurements, while ion temperature and rotation profiles were obtained from CX diagnostics. The plasma composition was computed using a prescribed workflow in which the densities of D and T ions were constrained to maintain quasi-neutrality and align with Z_{eff} measurements. The D/T ratio was inferred from HRS measurements, which provide $X[D]_X$ and $X[T]_X$, representing the D/T mixture at the SOL.

The plasma composition was assumed to consist of a time- and space-varying D/T mixture along with two impurities, Be and Ni. The electron density profile, $n_e(t, \rho)$, was mapped using pressure-constrained EFIT [59] reconstruction, while Z_{eff} measurements provided only the time evolution of Z_{eff} with a constant profile. This approach determines the densities of hydrogenic species and one impurity (Ni), while for Be, a fixed ratio of $n_{Be}/n_e=0.01$ was assumed, based on recent JET studies [60], which suggest this is a reasonable assumption.

The hydrogenic density was further divided into n_D and n_T densities by imposing the measured $X[D]_X$ (or equivalently $X[T]_X$) constraint. A key feature of this approach is that it constrains both n_D and n_T profiles evolution to align with n_e , Z_{eff} , $X[D]_X$ and beam source evolution. However, this method does not account for particle transport and cannot predict the evolution of n_D and n_T as gas injection sources change. Its sole purpose is to validate prescribed n_D and n_T profiles against experimental data for R_{NT} .

A notable limitation of this approach is that it relies on the measured $X[D]_X$ ratio from the divertor SOL region near the X-point, as shown in figure 3 a). Since this measurement does not represent the entire plasma volume, discrepancies arise because the actual $X[D]$ distribution within the plasma differs from $X[D]_X$. As a result, using $X[D]_X$ introduces potential errors in both the analysis and the RT control scheme.

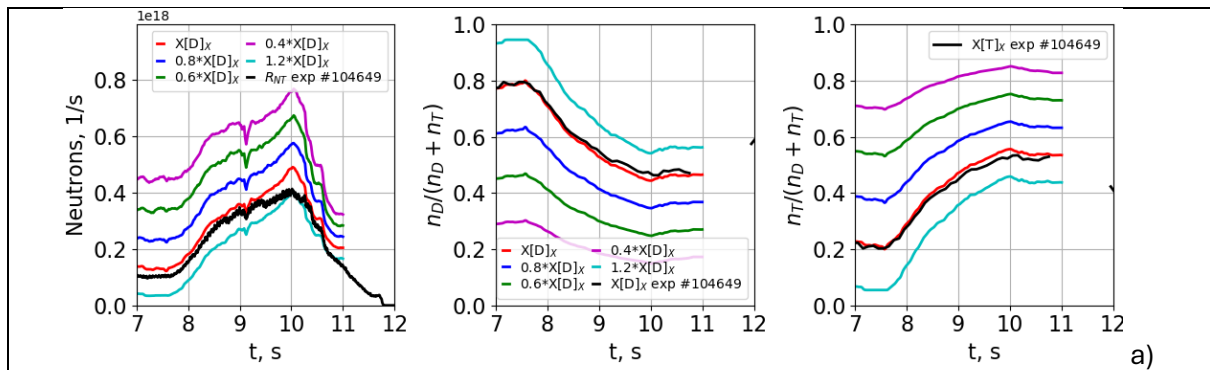

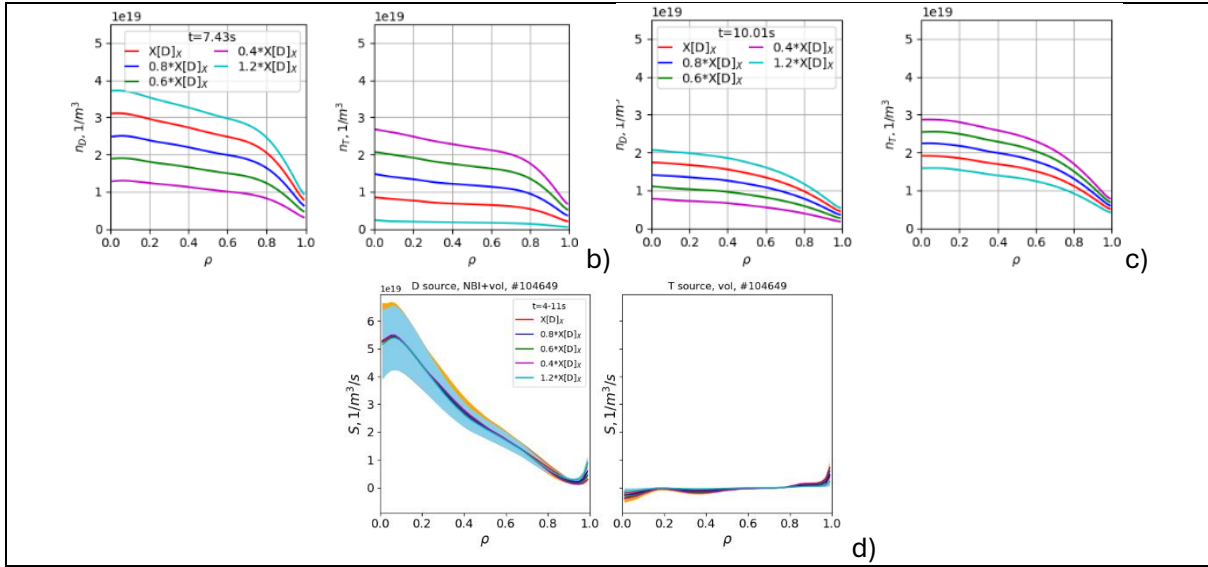


Figure 5: a) Results from TRANSP simulations of #104649 for measured R_{NT} and $X[T]_x$ (black) and calculated R_{NT} and calculated $\langle X[D] \rangle$ and $\langle X[T] \rangle$ for the cases when real $X[D]_x$ was used to deduce D/T ratio (red) and for cases with scaled $X[D]_x$ ratio: $0.8 \cdot X[D]_x$ (blue), $0.6 \cdot X[D]_x$ (green), $0.4 \cdot X[D]_x$ (magenta) and $1.2 \cdot X[D]_x$ (cyan). Corresponding n_D and n_T profiles at 7.43s are shown in b) and at 10s in c); d) calculated volume sources of D and T due to NBI and halo in time interval 4-11s.

The results of the TRANSP simulations are summarised in figure 5. Despite the simplified approach used for modelling the D/T mixture in TRANSP, figure 5 a) demonstrates that the calculated neutron yield closely matches the experimental data. When the D/T ratio is taken from HRS measurements, the calculated R_{NT} (red line) closely follows the measured neutron count, accurately reproducing the transient phase. In contrast, using a scaled $X[D]_x$ leads to significant deviations from the measured R_{NT} , as seen in figure 5 a). This suggests that while HRS measurements are taken from the SOL near the X-point, their quality is sufficiently high to be considered for a D/T ratio control system, i.e. $X[D]_x \sim \langle X[D] \rangle$, making HRS data a reasonable proxy for the D/T ratio within the plasma.

Figures 5 b) and c) show the evolution of n_D and n_T . The D ion density, n_D , includes NBI D ion source which is consistent with the workflow used in these TRANSP simulations. Both profiles follow the evolution of the electron density n_e , as seen at 7.43s (compare figure 4 b) and figure 5 b)). As the plasma parameters evolve, n_D and n_T profiles continue to mirror the evolution of n_e maintaining their initial shape.

A key question is whether this workflow can be used to develop a RT control scheme for D/T mixture control. For feasibility, RT signals for n_e , $X[D]_x$ (either $X[D]_x$ or $\langle X[D] \rangle$), Z_{eff} , and, if significant, the beam source, would be required. In implementing such a scheme, a realistic assumption about impurities should be made. In this study, we assume fully ionized Be and Ni with $n_{Be}/n_e=0.01$, a reasonable assumption for future thermonuclear machines where impurity sources and transport are well-characterized, as was the case during the late JET DTE experiments. The only remaining uncertainty is the beam source. However, figure 5 d) shows that in a given scenario, variations in the beam source are minimal over a broad range of D/T ratios.

The discussion above strongly indicates that, based on TRANSP modelling, a simplified model can be developed and implemented in real-time D/T ratio control schemes. By providing an RT control tool with inputs from n_e , $X[D]$, Z_{eff} , and an initial estimate of the NBI source, a control

scheme using gas injection actuators — based on simplified quasi-neutrality and Z_{eff} calculations — should perform satisfactorily, as supported by the results presented here.

JETTO simulations with predictive particle transport: comparison to experiment

JETTO was run predictively for n_D and n_T densities, while the electron and ion temperatures evolution was fixed to the corresponding measured values. The particle diffusion coefficient, D_D and D_T , which govern conductive particle transport, and the inward pinch terms, V_D and V_T , which represent convective transport, were varied. As discussed in the previous section, Bohm-gyroBohm model [27] was used to calculate electron and ion heat diffusivities according to eqs. (1) to (3), while ions diffusivities, D_D and D_T , were derived according to eq. (4). A summary of the key settings in performed JETTO runs is provided in table 2.


Table 2: Details of JETTO simulations.

		equilibrium	T_e, T_i	n_D, n_T	neutrals	impurities	rotation
Mode	Evolving	Evolving with prescribed boundary	prescribed	predictive	predictive	predictive	prescribed
Codes	JETTO	ESCO	from measurements	GgB, (QuaLiKi z)	FRANTIC	SANCO, calculated Z_{eff}	from measurements
		Boundary from EFTP	TS and CX data				CX data

Heating/fuelling	fusion	radiation	n_D, n_T sources	ETB	MHD
predictive	predictive	prescribed	predictive	prescribed	prescribed
PENCIL, ASCOT	JETTO	from measurements	FRANTIC, HPI2 (cont model), PENCIL (ASCOT)	JETTO, fixed barrier width	JETTO, ELM continuous TOB model
		Bolometry data			

Fuelling by gas injection only.

Results from JETTO modelling of JET pulse #104649 which was fuelled by gas injection of D and T are shown in figure 6.

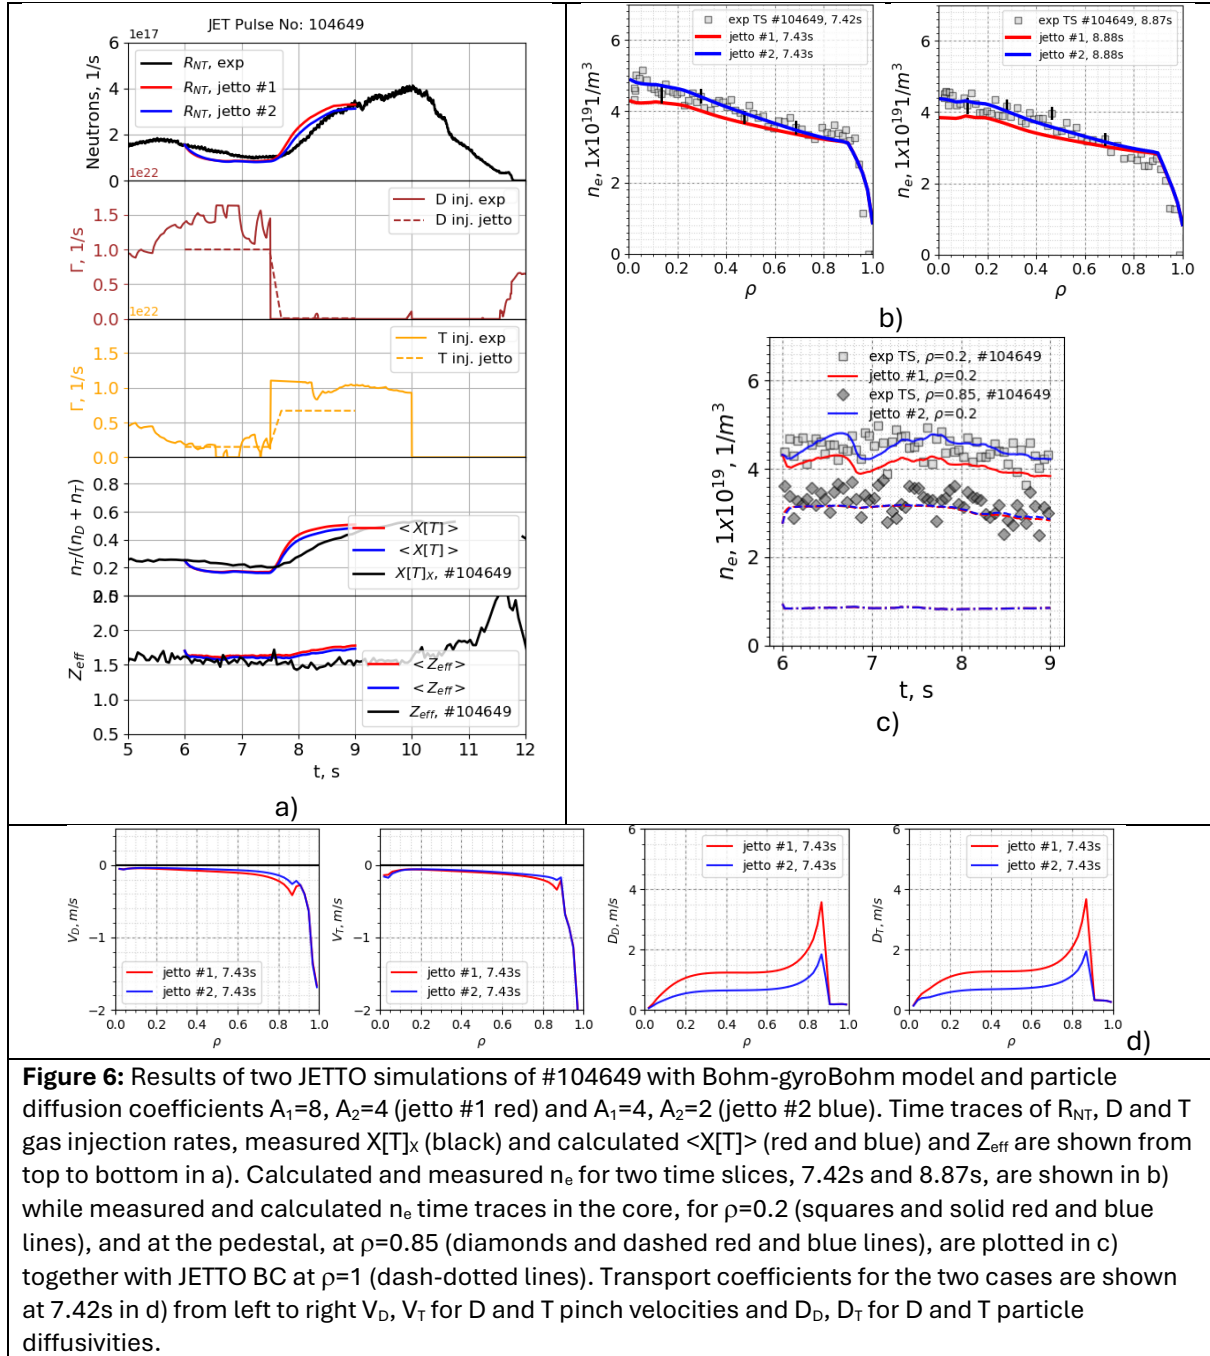

In this workflow, initial simulations were conducted to fine-tune the parameters of the H-mode pedestal barrier and the FRANTIC gas injection rates. The latter provide particle sources, which are localized in the pedestal region, figure 2 b) and c). The pedestal width was determined from measurements, while the sources and transport coefficients within the pedestal were adjusted to match the observed pedestal height. Once the pedestal and gas injection sources were established, a multidimensional parameter scan was performed across the A_1 , A_2 , and $\alpha_t^{\square}$ parametric space, see eqs. (4) and (5). This scan was facilitated by a newly developed API in JETTO [61].

The scans were evaluated by minimizing the chi-square difference between the modelled and measured electron density, n_e , and neutron yield, R_{NT} . Figure 6 presents the results for two of

the best-fitting parameter sets: $A_1=8$, $A_2=4$, $\alpha_i^{inw} = 0.05$ and $A_1=4$, $A_2=2$, $\alpha_i^{inw} = 0.05$. A strong agreement between the modelled and measured n_e profile evolution and R_{NT} time traces was achieved when the FRANTIC gas injection rates were slightly reduced, figure 6 a) second and third graphs. In the initial D-rich phase, the FRANTIC D gas injection rate was set to $\Gamma_{D,inj} \sim 1e22$ 1/s, approximately 40% lower than the experimental injection rate. Similarly, in the T-rich phase, the FRANTIC T gas injection rate $\Gamma_{T,inj}$ needed to be reduced by about 30% compared to experimental values to match the steady-state $\langle X[T] \rangle$.

Discrepancies in the D/T ratio, Figure 6 a), between the HRS measurement, $X[T]_x$ and the JETTO result, $\langle X[T] \rangle$, primarily arise in their rate of increase. However, after the transient ramp-up of $X[T]_x$, the steady-state values are consistent, with $\langle X[T] \rangle \sim X[T]_x \sim 0.2$ at 7.45s and $\langle X[T] \rangle \sim X[T]_x \sim 0.5$ at 9s. The difference in time evolution can be attributed to the measurement locations: HRS provides $X[T]_x$, representing the T concentration in the divertor SOL region, while JETTO calculates $\langle X[T] \rangle$, an averaged value over the plasma.

In the experiments presented, T gas was injected from the midplane LFS, figure 3 a). Assuming high T injection efficiency (i.e. i.e. high ratio of $n_{T,sep} / \Gamma_{T,inj}$) and negligible leakage of injected T gas into the divertor region, the main contributor to the measured $X[T]_x$ in HRS is expected to be from T recycling. This recycling process occurs on a slow timescale, as it involves the penetration of injected T into the core. In contrast, JETTO assumes poloidally uniform gas injection, leading to a faster evolution of $\langle X[T] \rangle$ compared to the experimental $X[T]_x$, where the effects of penetration and recycling have more significant impact.

Theoretical studies [34] suggest that for H/D mixtures in an ITG-dominated turbulence regime, the diffusion coefficients for D and H ions range between 1.2–2.6 m²/s when switching from a D to an H source, table 5 in [34]. For the case with $A_1=8$, $A_2=4$, the diffusivities at $p=0.5$ were $D_D \sim D_T \sim 1.2$ m²/s, figure 6 d), which aligns with these theoretical predictions, considering that the present experiment involves a D/T mixture rather than H/D. While [34] predicts larger convective velocities, the combination of pure convection and thermodiffusion — both of similar magnitude but opposite in sign — results in a small net convection term, consistent with the values shown in figure 6 d).


Fuelling by gas injection and pellets

The case in which initial D fuelling was performed using pellets, specifically JET pulse #104651, is discussed here, with JETTO simulation results presented in figure 7. Two pellet models were employed in this study: HPI2 and the continuous model.

The HPI2 model is a first-principles physics model that accounts for pellet ablation and deposition. However, running JETTO with HPI2 is computationally expensive and slow, particularly in scenarios requiring parameter scans. In contrast, the continuous pellet model assumes a prescribed Gaussian pellet deposition profile in toroidal p , making it significantly faster and more practical for performing large-scale scans. To balance accuracy and efficiency, an initial short-timescale run using the HPI2 model was conducted to estimate realistic pellet ablation and deposition, i.e. particle source. Once the real pellet deposition was determined, a Gaussian fit was applied, figure 2 c), allowing the continuous model to be used for extended simulations.

The results from JETTO modelling of JET pulse #104651, where D pellets were used for initial fuelling and T gas injection was applied in the second phase, are shown in figure 7. Two

parameter sets for particle diffusion and pinch velocity coefficients were tested: $A_1=4$, $A_2=2$, $\alpha_i^{inw} = 0.05$ and $A_1=8$, $A_2=4$, $\alpha_i^{inw} = 0.05$.

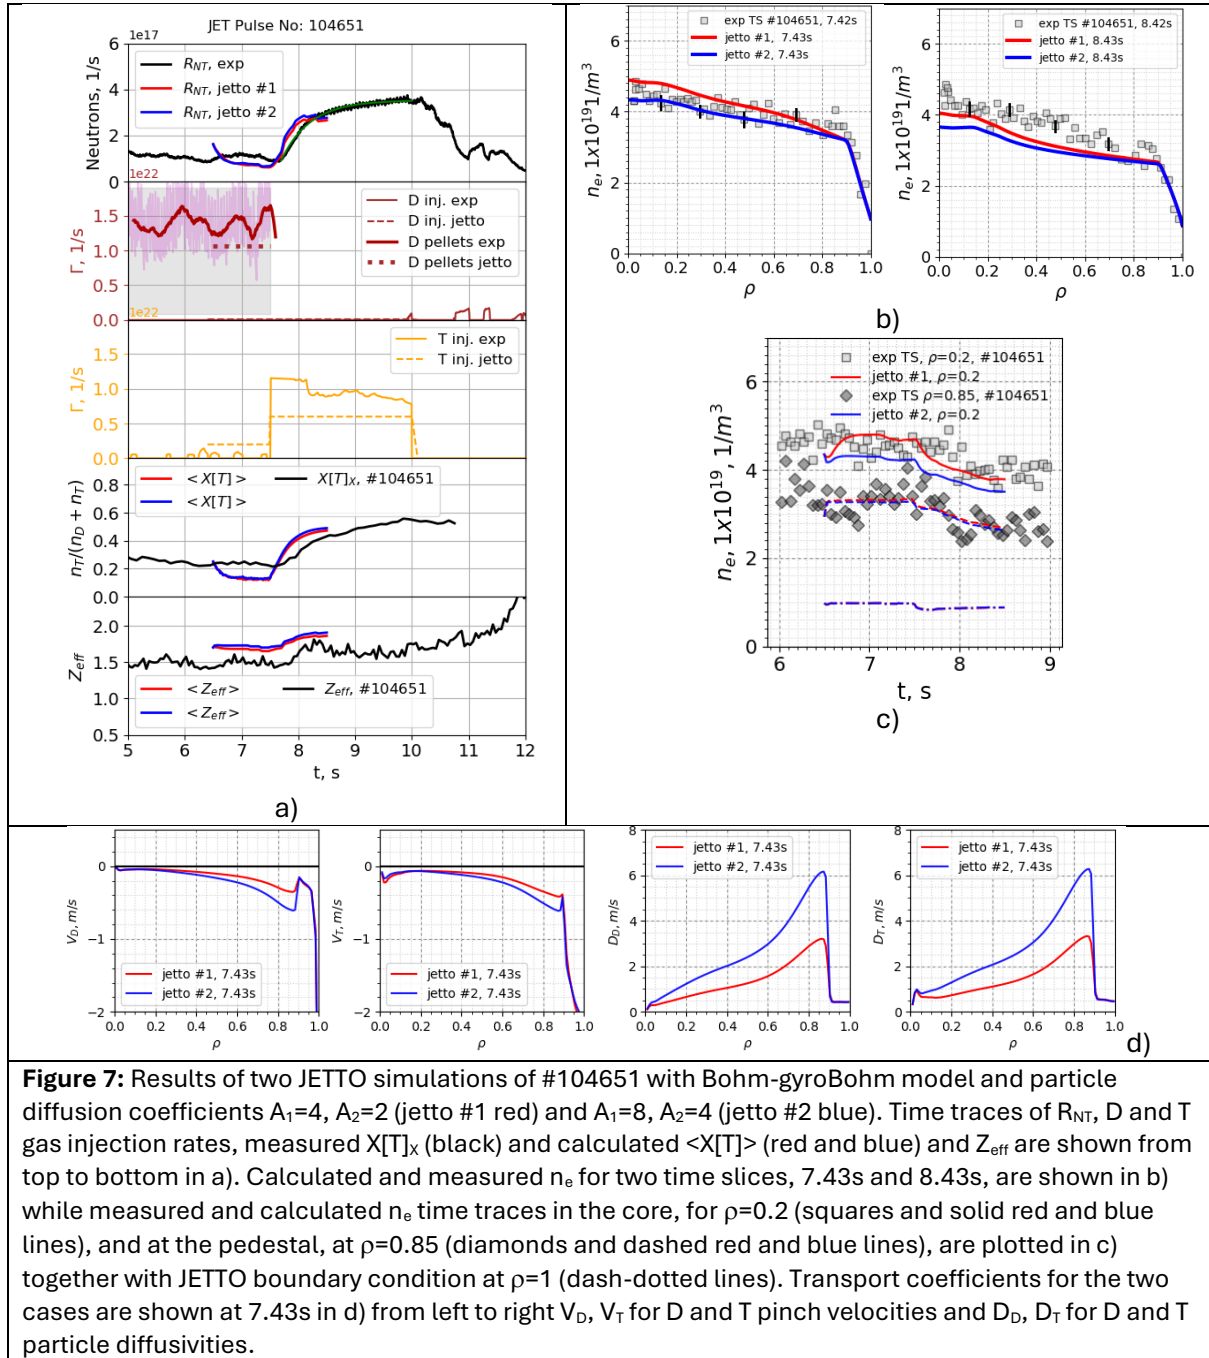

Similarly to pulse #104649, figure 6, in the pellet-fuelled case, the T injection rates in FRANTIC had to be reduced during the D/T ratio equipartition phase, i.e., after 7.5s. Interestingly, we found that a small amount of T injection or recycling needed to be assumed during the initial phase when a D -rich plasma was being established, figure 7 a), third graph, before 7.5s. Without this additional T ion source, the D/T ratio in our simulations would rapidly evolve toward nearly 1.0/0.0. However, even with the assumed small T injection, the simulations remained inconsistent with the measured D/T ratio of approximately 0.8/0.2 at 7.5s. One possible explanation for this discrepancy is that the real D pellet fuelling was overestimated in

the simulations and somewhat in the experimentally assessed rates, figure 7 a). Although both the JETTO model and the experimentally assessed rates consistently indicate rates of about $1.1\text{-}1.3 \times 10^{22}$ 1/s it is possible that not all pellets produced and detected in the feeding line were successfully delivered to the plasma.

Despite this inconsistency in the modelled D/T ratio before 7.5s, the model predicts the n_e profiles and R_{NT} evolution reasonably well. The initial D-rich phase is best reproduced for higher transport coefficients, $A_1=8$, $A_2=4$ (blue curves), while the equipartition phase after 7.5s is better captured with lower transport coefficients, i.e. $A_1=4$, $A_2=2$ (red curves). However, in both cases, the density profiles at mid-radius in the second phase are somewhat underpredicted. The D/T ratio evolution, $\langle X[T] \rangle$, is poorly matched during the initial stage and only aligns with the measured $X[T]_x$ toward the end of the simulation, around 8.5s.

JETTO simulations with predictive particle transport: case studies

Having demonstrated JETTO's predictive capabilities in modelling D/T ratio control experiments, the next step is to leverage the code to investigate the impact of all actuators operating across their full range. Due to various technical constraints and limited operational time, several planned experiments intended to complement the described studies were not completed. These unperformed experiments are now being explored through JETTO predictive modelling analysis, allowing for a comprehensive assessment of their expected outcomes.

Swapping D and T injection

JET pulse #104649 demonstrated the full capabilities of D/T ratio control through D and T gas injection. However, due to the tight experimental schedule, it was not possible to experimentally swap the D/T injection sequence and study the recovery from a T-rich plasma to a D/T ratio of approximately 0.5/0.5. Now, with the validated JETTO model, we have the opportunity to investigate this reversed scenario, where the D and T gas injections are swapped. The results of this simulation are presented in figure 8.

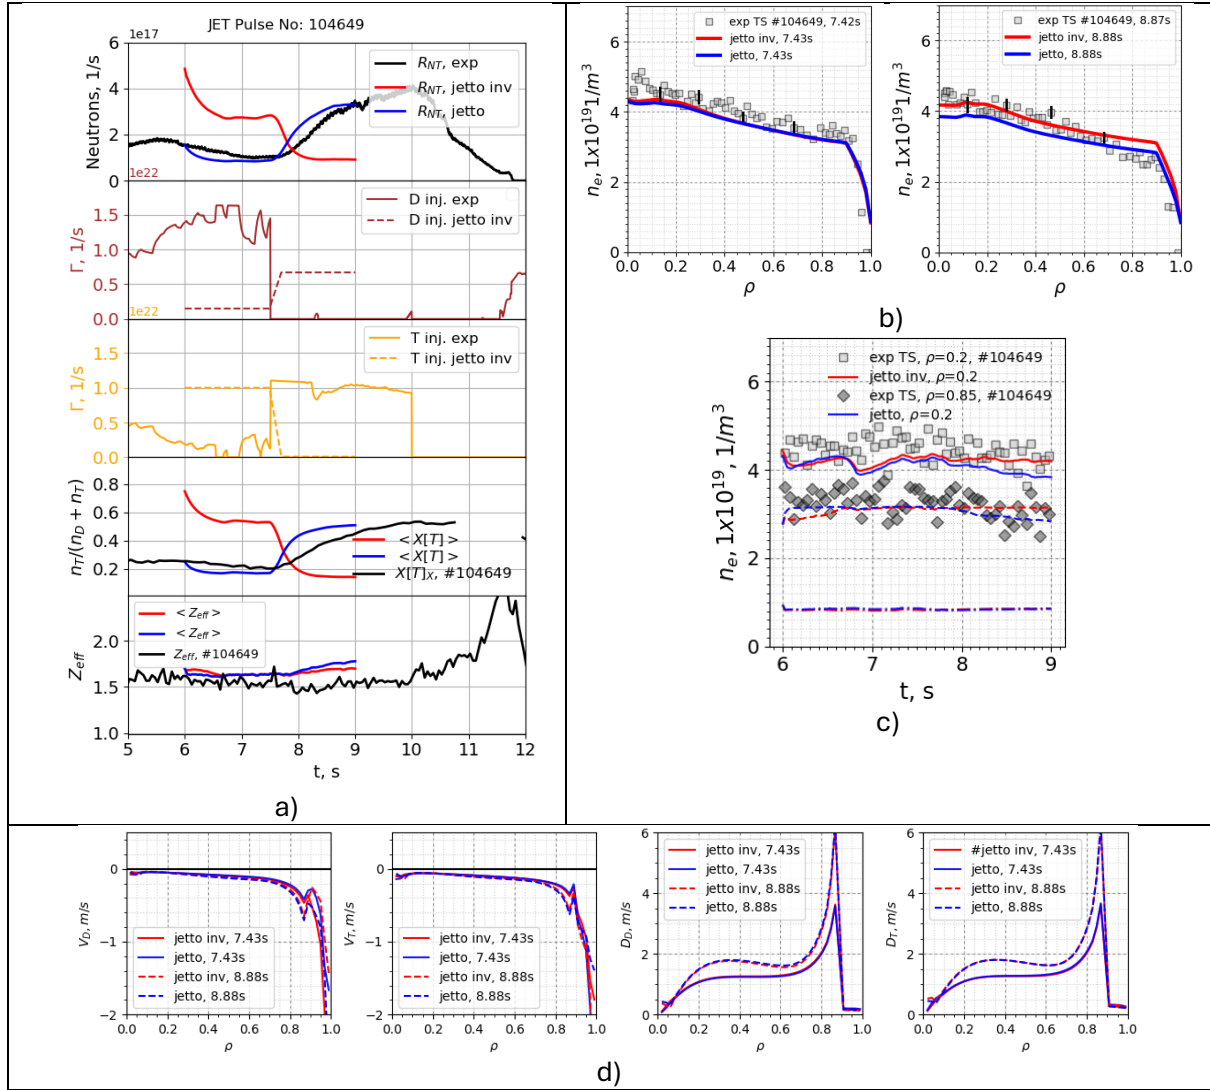


Figure 8: Results of two JETTO simulations of pulse #104649, with particle diffusion coefficients $A_1=8$, $A_2=4$, are presented for both the standard experimental sequence (labelled ‘jetto’ in blue) and a reversed scenario (labelled ‘jetto inv’ in red), where T injection was used initially to create a T-rich plasma before 7.5s, followed by D injection to achieve a more balanced D/T ratio. The time traces of R_{NT} , D and T gas injection rates, measured $X[T]_x$ (black), and calculated $\langle X[T] \rangle$ (red and blue), along with Z_{eff} , are shown in a). Calculated and measured electron densities n_e for two time slices, 7.43s and 8.88s, are presented in b). Measured and calculated n_e time traces in the core ($\rho=0.2$, squares and solid red/blue lines) and at the pedestal ($\rho=0.85$, diamonds and dashed red/blue lines) are shown in c). It is important to note that the reversed scenario case (red curves) represents a simulation, not an actual experiment, and thus direct comparison with measurements is not valid. The measured data in this case are provided for illustration purposes only.

Interestingly, in the reverse scenario simulations, despite an initial overflow of T gas into the vessel, a T-rich plasma could not be achieved, as shown in figure 8 a). In contrast, with similar but reversed injection rates, a D-rich plasma was successfully achieved before 7.5s, as seen in figure 6 a). The main suspected reason for this disparity appears to lie in the NBI fuelling. Despite the NBI particle source being an order of magnitude lower, figure 2, it seems to play an important role in regulating the D/T ratio. With the initial conditions set to small D and large T injection, the reversed scenario quickly evolves from a D/T ratio of 0.8/0.2 to approximately 0.5/0.5. Following this, the disbalancing of gas injection—shutting down T injection and continuing D injection—further lowers the $X[T]_x$ ratio.

This example clearly highlights the importance of examining future real-time (RT) controllers using particle transport simulations first. This approach ensures that RT controller parameters can be optimized for better performance in regulating D/T ratios and improving overall plasma control.

Fuelling with T pellets

JET pulse #104651 demonstrated, for the first time, D/T ratio control through the use of pellets. However, due to hardware limitations — specifically the pellet injector's inability to produce T pellets — the experiment could not be fully explored, particularly in terms of demonstrating operations with two pellet injectors. This would be an important step for future fusion machines, which are planned to use pellets for both D and T injection. The case in which D/T ratio control was performed with T pellets in the initial phase followed by D injection was now investigated using JETTO simulations. The results of this analysis for the T pellets scenario are shown in figure 9.

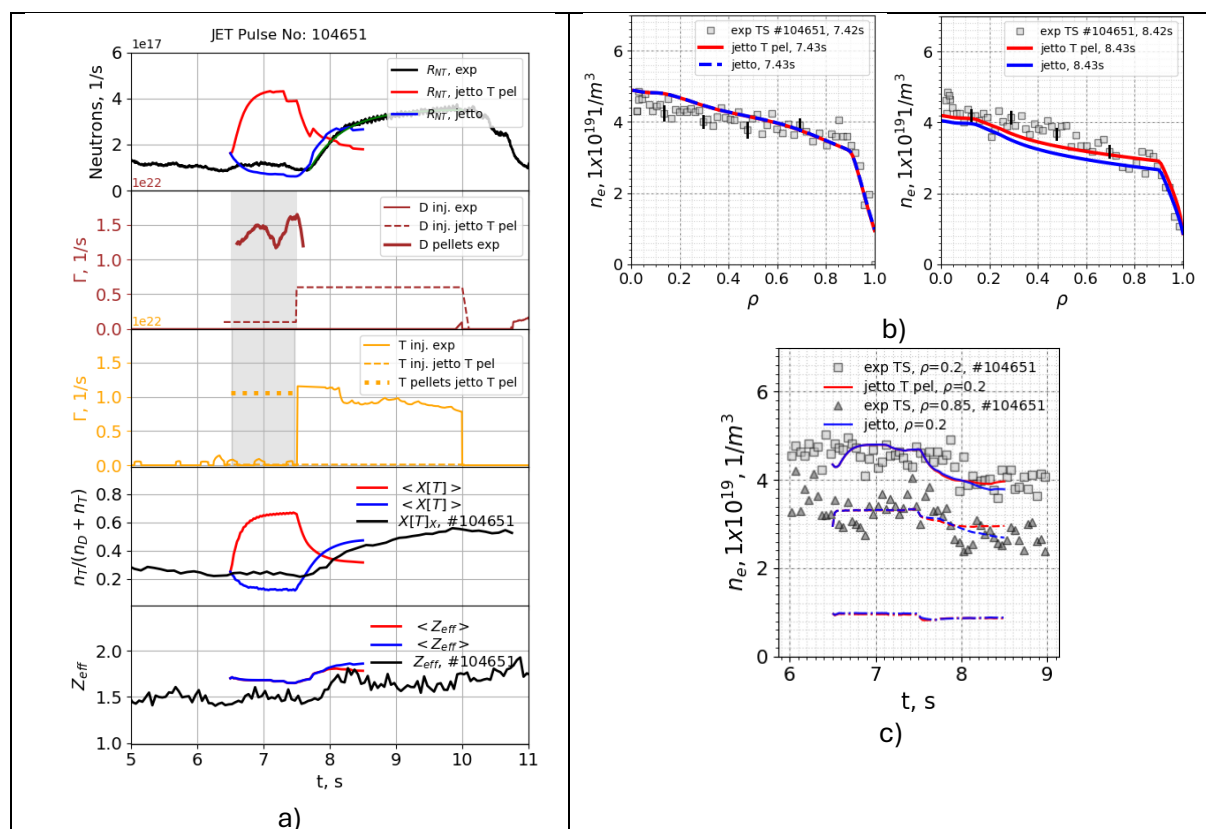


Figure 9: Results of two JETTO simulations of #104651 with particle diffusion coefficients $A_1=4$, $A_2=2$ (labelled 'jetto' in blue) and simulation in which T and D sources were swapped with T pellets and the beginning and D gas injection in the second phase (labelled 'jetto T pel' in red). Time traces of R_{NT} , D and T gas injection rates, measured $X[T]_x$ (black), and calculated $\langle X[T] \rangle$ (red and blue) and Z_{eff} are shown in a). T pellet time window is shown by grey area in a). Calculated and measured n_e for two time slices, 7.43s and 8.43s, are shown in b) while measured and calculated n_e time traces in the core, for $\rho=0.2$ (squares and solid red and blue lines), and at the pedestal, at $\rho=0.85$ (triangles and dashed red and blue lines), are plotted in c). It is important to note that T pellet scenario case (red curves) is not a real experiment and simulations must not be directly compared to measurements. Measured data in this case is only provided for illustration.

Similar to the D pellet case shown in figure 7, the T pellet fuelling proves to be highly effective in achieving a T-rich plasma, as seen in figure 9 a). D/T ratios of approximately 0.3/0.7 were

quickly reached despite the small D injection and NBI D fuelling. Once the T pellets were stopped and D injection was increased after 7.5s, the initial phase quickly transitioned to a D-rich plasma.

The predicted neutron rate closely follows the $\langle X[T] \rangle$ trend, indicating consistency with expected improved fusion performance for D NBI heated T-rich plasma, as described in [5]. This demonstrates the capability of T pellet fuelling to effectively control the D/T ratio and enhance plasma performance, even with limited D injection.

Conclusions

The results presented here clearly demonstrate that simple models and assumptions regarding D/T transport and sources can be successfully adopted to predictively model the behaviour of RT controllers for D/T ratio. It is not necessary to model the SOL and core in detail across all channels to carry out such tasks. This study shows that a simplified approach can be effective, using (i) measured T_e , T_i , (ii) not modelling the SOL physics, and (iii) simplifying particle transport assumptions. This conclusion is crucial for developing numerical tools to test future controllers.

For future RT controller development aimed at D/T ratio control, the models presented here would serve as a foundation for further improvements. For example, as demonstrated by TRANSP modelling, an RT scheme based on simple quasi-neutrality and Z_{eff} calculations could be implemented successfully. This study shows that such a scheme would work well with rough estimates of impurities and NBI particle sources.

Additionally, modelling the response of the desired output — D/T ratio in this case — across various scenarios, as demonstrated through JETTO predictive particle modelling, would be a valuable outcome from this study. For adjusting and optimizing RT controllers, this workflow could save experimental time and reduce the need for expensive computations.

Acknowledgement

This work has been carried out within the framework of the EUROfusion Consortium, funded by the European Union via the Euratom Research and Training Programme (Grant Agreement No 101052200 — EUROfusion) and from the EPSRC [grant number EP/W006839/1]. Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union or the European Commission. Neither the European Union nor the European Commission can be held responsible for them.

The Author K.K. is greatly appreciative of the discussions with C. Angioni, M. Maslov and T. Tala regarding particle transport in mixed DT plasma.

References

1. C. Maggi et al 2024 Nucl. Fusion **64** 112012
2. L. Garzotti et al 2023 29th IAEA Fusion Energy Conference (FEC 2023) 16-21 October 2023, London, United Kingdom
3. J. Hobirk et al 2023 Nucl. Fusion **63** 112001
4. A. Kappatou et al 2025 Plasma Phys. Control. Fusion **67** submitted

5. M. Maslov et al 2023 Nucl. Fusion **63** 112002
6. M. Lennholm et al 2024 PFX Energy submitted
7. L. Piron et al 2021 Fusion Engineering and Design **166** 112305
8. M. Baruzzo et al 2025 30th IAEA Fusion Energy Conference (FEC 2025)
9. ITER team 1999 Nucl. Fusion **39** 2137
10. A. Loarte et al 2007 Nucl. Fusion **47** S203,
11. J. Creely et al 2020 J. Plas. Phys. **86** 865860502
12. V. G. a. E. Schuster et al 2022 Nucl. Fusion **62**, 026016
13. M. Lennholm et al. 2024 Nucl. Fusion **64** 096036
14. M. Lennholm et al. 2024 Phil. Trans. R. Soc. A **382**, 20230403
15. M. Romanelli et al 2014 Plasma and Fusion Research **9** 3403023
16. Hawryluk R. J. et al, An empirical approach to tokamak transport Physics of Plasmas Close to Thermonuclear Conditions Vol, 1, ed B. Coppi et al (Brussels: CEC) pp 19–46; DOI 10.11578/dc.20180627.4 (1980)
17. B. Copi, N. Sharky 1981 Nucl. Fusion **21** 1363
18. L. Garzotti et al 2003 Nucl. Fusion **43** 1829
19. V. Zotta et al 2024 50th EPS Conference on Plasma Physics (EPS 2024) 8-12 July 2024, Salamanca, Spain.
20. T. Tala et al 2023 Nucl. Fusion **63** 112012
21. A. Pankin, D. McCune, R. Andre et al., "The Tokamak Monte Carlo Fast Ion Module NUBEAM in the National Transport Code Collaboration Library", Computer Physics Communications Vol. 159, No. 3 (2004) 157-184
22. S. Tamor 1981 J. Comput. Phys. **40** 104
23. G. Cenacchi, A. Taroni, 1988 JET report JET-IR(88)03
24. P. Stubberfield and M. Watkins 1987 JET report JET-DPA(06)/87
25. C. D. Challis et al 1989 Nucl. Fusion **29** 563
26. E. Hirvijoki et al 2014 Comput. Phys. Commun. **185** 1310
27. M Erba et al 1997 Plasma Phys. Control. Fusion **39** 261
28. JETTO wiki manual, https://users.euro-fusion.org/pages/data-cmg/wiki/JETTO_Wiki.html
29. L. Garzotti et al 1997 Nucl. Fusion **37** 1167
30. F. Koechl et al 2012 JET report EFDA-JET-PR(12)57
31. P. Schneider et al 2023 Nucl. Fusion **63** 112010
32. H. Weisen et al 2020 J. Plas. Phys. 905860501
33. J. Garcia et al 2022 Plasma Phys. Control. Fusion **64** 054001
34. C. Bourdelle et al 2018 Nucl. Fusion **58** 076028
35. M. Maslov et al 2018 Nucl. Fusion **58** 076022
36. P. Schneider et al 2022 Nucl. Fusion **62** 026014
37. Fusion Physics, eds. M. Kikuchi, K. Lackner, M. Q. Tang, IAEA Vienna 2012
38. C. Angioni et al 2009 Plasma Phys. Control. Fusion **58** 124017
39. E. A. Belli, J. Candy 2021 Phys. Plas. 062301
40. F. Casson et al 2020 Nucl. Fusion **60** 066029
41. M. Marin et al 2020 Nucl. Fusion **60** 046007
42. W. Horton 1999 Rev Mod Phys **71** 735
43. S. D. Scott 1995 Phys. Plas. **2** 2299
44. J. Cordey 1999 Nucl. Fusion **39** 301
45. R. Simonini et al 1994 Contrib. Plasma Phys. **34** 368
46. D. Reiter et al 2005 Fusion Science and Technology **47(2)** 172

47. G. Corrigan 2019 note on JETTO updates
48. L. Frassinetti et al 2012 Rev. Sci. Instrum. **83** 013506
49. L. C. Ingesson 1999 JET Report JET-R(99)06
50. V. Zoita et al 2009 IEEE Int. Conf. on Plasma Science—Abstracts (San Diego, CA 2009)
(<http://www.proceedings.com/06018.html>)
51. Z. Ghani et al 2018 Fusion Engineering and Design, **136** 233
52. T.M. Biewer et al 2007 JET Report EFDA–JET–CP(07)03/24
53. V. S. Neverov et al 2017 Nucl. Fusion **57** 016031
54. C. F. Maggi et al 2012 Rev. Sci. Instrum. **83** 10D517
55. B. A. Lomanowski et al 2014 Rev. Sci. Instrum. **85** 11E432
56. U. Kruezi et al 2012 Rev. Sci. Instrum. **83** 10D728
57. R. Felton et al 2025 Plasma Phys. Control. Fusion, submitted.
58. C. Angioni et al 2007 Nucl. Fusion **47** 1326
59. L. Lao et al 1985 Nucl. Fusion **25** 1611
60. Z. Stancar et al 2023 Nucl. Fusion **63** 126058
61. E. Tholerus et al 2024 Nucl. Fusion **64** 106030
62. M. Erba et al 1998 Nucl. Fusion **38** 1013
63. D. Hannum et al 2001 Phys. Plasmas **8** 964