



UKAEA-RACE-PR(23)01

Alessandro Altobelli, Ozan Tokatli, Robert Skilton

Optimal grasping pose synthesis in a constrained environment

Enquiries about copyright and reproduction should in the first instance be addressed to the UKAEA Publications Officer, Culham Science Centre, Building K1/O/83 Abingdon, Oxfordshire, OX14 3DB, UK. The United Kingdom Atomic Energy Authority is the copyright holder.

The contents of this document and all other UKAEA Preprints, Reports and Conference Papers are available to view online free at scientific-publications.ukaea.uk/

Optimal grasping pose synthesis in a constrained environment

Alessandro Altobelli, Ozan Tokatli, Robert Skilton

Highlights

Optimal grasping pose synthesis in a constrained environment

Alessandro Altobelli, Ozan Tokatli, Robert Skilton

- This paper presents a strategy to compute the optimal trade-off between grasping posture and contact forces in a constrained environment by minimising a suitable cost index that includes the desired contact point positions to plan grasping pose.
- To identify feasible grasps a novel holistic approach, which takes into account the constraints of the workspace, is achieved by designing an optimization algorithm with: i) a suitable cost index that evaluates the grasping pose quality and contact force distribution, ii) modelling the environmental limitations using linear and nonlinear functions which relate to collision between the manipulation system and the limited workspace.
- Simulations and experimental results corroborate the usability of the described strategy that identifies multiple grasping poses in a glovebox mock-up.

Optimal grasping pose synthesis in a constrained environment[★]

Alessandro Altobelli^{a,*,1} (Research Engineer), Ozan Tokatli^{a,2} (Research Engineer) and Robert Skilton^{a,**,3}

^aRACE, United Kingdom Atomic Energy Authority, Culham Science Centre, Abingdon, OX14 3DB.

ARTICLE INFO

Keywords:

glovebox
nuclear robotics
grasping
autonomous system
waste decommissioning

ABSTRACT

In the last decades, several approaches have been presented to accomplish tasks with a robot or autonomous systems in a glovebox, nevertheless, in nuclear facilities, risky operations are still executed by humans that guarantee a high manipulation capability and dexterity. Inside the gloveboxes, robotic devices have to operate in cluttered environments, or environments with limited space for movement; therefore it is of significant interest to identify grasping poses those are feasible within such constrained environments. In this paper, we present and experimentally evaluate a strategy to synthesize optimal grasps of geometric primitives for anthropomorphic manipulation systems in a constrained environment. The novel strategy has been experimentally evaluated in a cluttered environment (as glovebox mock-up) with realistic objects, as a result, we demonstrate the suitability of our developed algorithm.

1. INTRODUCTION

Robotics is a key technology for the nuclear industry, which takes an important role for the safe and cost-effective maintenance of safety-critical sections in reactors, research labs and similar places. There is a constant search for new robotic solutions to improve the safety of operations and reduce operational costs [1, 2].

In the nuclear industry and research, gloveboxes, which are contained environments which are used to handle hazardous objects/tasks in a safe fashion, are extensively used. Despite the comprehensive protective equipment and safety procedures, which are developed over the years, glovebox operations are still posing a high risk for the operators. Moreover, due to the strenuous working conditions, glovebox operations for operators are slow and intensive in terms of the task load.

Improving safety and efficiency in glovebox operations have become a new research topic drawing more attention. These new glovebox solutions utilise cutting-edge robotics, AI and computer vision technology to assist the operator during glovebox operations, improve the safety of the operator and increase the overall productivity.

The glovebox environment, such as in Figure 1, is cluttered, dynamic and the tasks executed in gloveboxes are significantly complex and safety-critical; therefore, a stand-alone robotic system cannot be expected to out-perform a human operator with the current technology. Moreover, due to safety



Figure 1: The glovebox mock-up and the manipulation system with representative cylindrical containers to store radioactive substances.

concerns, human-in-the-loop solutions are found to be more reliable. Robotic solutions for gloveboxes mostly rely on teleoperation in order to keep the human in the decision making process. However, ideal robotics solutions which will attain better productivity, reduced cost and increased safety by relying on autonomous systems. Despite the considerable amount of research, deploying an autonomous robotic system inside a glovebox is not feasible with current technology; however, certain parts of the task execution can benefit from autonomy.

A close inspection of task execution of operators can reveal that object manipulation or tool use is common in many glovebox operations. Hence, it can be concluded that grasping plays a fundamental role in a safe and successful operation. On the other hand, grasping alone is a very complex procedure and automating the grasping for a robotic system is one of the fundamental research questions which is yet to be solved.

Grasping is a very complex task for a robot to execute because of i) considering the geometric constraints (such as obstacles in the environment, the glovebox boundaries) on the arm/gripper pose, ii) identifying a suitable grasp pose on the

[★]This project has been supported by the RAIN Hub, which is funded by the Industrial Strategy Challenge Fund, part of the government's modern Industrial Strategy. The fund is delivered by UK Research and Innovation and managed by EPSRC [EP/R026084/1].

*Corresponding author

**Principal corresponding author

ORCID(s): 0000-0002-1022-8733 (A. Altobelli); 0000-0002-4920-1634 (O. Tokatli); 0000-0003-1076-906X (R. Skilton)

¹E-mail address: alessandro.altobelli@ukaea.uk or alessandro.altobelli84@gmail.com

²E-mail address: ozan.tokatli@ukaea.uk

³E-mail address: robert.skilton@ukaea.uk

manipulated object and iii) applying a suitable contact force distribution for a safe hold. Improving autonomous grasping strategies could provide novel tools to support the operator in order to identify feasible grasping poses, the same solutions could be used to develop robotic glovebox with a high degree of autonomy.

This paper aims to present a strategy to compute the optimal trade-off between grasping posture and contact forces in a constrained environment by minimising a novel cost index that extends the work in [3] by including the desired contact point positions to plan grasping poses. A novel holistic approach, which takes into account the constraints of the workspace, is achieved by designing an optimization algorithm with: i) a suitable cost index that evaluates the grasping pose quality and contact force distribution, ii) modelling the environmental limitations using linear and non-linear functions which relate to a collision between the manipulation system and the limited workspace.

Although our experimental setup uses a two-finger gripper configuration, the procedure presented can be generalised to hands with multiple fingers. The results in this paper show that the work is well suited to applications with limited workspace such as within a glovebox.

The rest of the paper is arranged as follows. Section 2 introduces: i) robotic solutions for handling and grasping tasks in nuclear environment, ii) grasping strategies with robotics manipulation systems in a constrained environment. Section 3 presents the limits of legacy gloveboxes and defines the problem. Section 4 describes in detail the implementation of the algorithm in order to identify optimal grasping poses. In Section 5, the experimental setup is described in details. In Section 6, simulation results are provided to show the effectiveness of the proposed algorithm, then, optimal grasping poses are tested and validated on a real robot. Results are discussed in depth in Section 7. Conclusions and directions for future works are presented in Section 8.

2. Literature Review

2.1. Robots in Gloveboxes

In the last forty years, the robotics research community investigates innovative robotic solutions to improve the safety and the efficiency of operational activities in nuclear environments. In [4], the authors highlight the importance of robotic solutions to accomplish inspections and decommissioning tasks in a hazardous environment and glovebox, in particular, this aspect was investigated more in-depth with preliminary experiments in [1], where a robotic manipulator was exploited to dismantle a JDPR reactor. Autonomous robot and tele-operation are also key factors to innovate legacy glovebox that is going to be dismantled in multiple nuclear facilities in the world. Up to now, operators accomplish different tasks by inserting the hand (with proper equipment) in a hazardous environment where the consequence of an accident could be serious: the operator could be contaminated by accidental cuts of the rubber glove ([5]) or by an error in operation process ([6]). Robotics and artificial intelligence can

be profitably used to remove the operator from dangerous tasks while autonomous or semi-autonomous systems could accomplish the activities. To pursue this aim, it is necessary to improve the control strategies of manipulation systems in order to operate in complex environments with constraints and robot redundancy ([7]).

One preliminary study into the use of automated robotics within a glovebox is presented in [8], where automation system and non-redundant robotic arms are proposed to mitigate human operator risks in handling activities. In order to reduce operational cost, robotic solutions are proposed to execute ad hoc tasks ([9] and [10]) and simulations are developed to aid in mitigating hazards that may be introduced as a result of the deployment of robotic manipulators ([11]). The solutions proposed above are not multipurpose because they are designed to solve specific tasks. In this scenario, redundant collaborative robots can potentially improve the system manipulation capabilities ([12]) as redundancy can be exploited to adapt robot poses, for example, to avoid collision with objects in the constrained space, or to handle an object with higher quality grasping index ([13]), and therefore more robust handling. At the same time, novel strategies need to be designed to exploit redundancy within individual applications or tasks with the aim to reduce the control complexity.

The same strategies could support the operators in manipulation and grasping tasks that are accomplished with difficulty by tele-operation inside the glovebox as shown in [14] or in [15].

While a training course could improve the ability in manipulation tasks ([16]) and reduce the fatigue, in some case an autonomous system could provide aid to the operator ([17]) to control the robot at any level of autonomy.

More recent research fields explore how to reduce the operator workload with high-level instructions given to the robot by voice command ([18]) while the usability of a humanoid robot is explored in order to do bi-manual tasks inside a legacy glovebox ([19] and [20]). In general, all the solutions, which are cited above, exploit methods and strategies presented in robotics literature in order to identify reliable grasping poses.

2.2. Grasping

Robotics theories are fundamental to identify feasible grasping solutions in a constrained workspace such as glovebox, within the robotics literature, two different strategies are commonly used in order to identify feasible grasping poses that satisfy the environmental constraints: 1) finding grasp poses without considering constraints and then filtering them to respect environment constraints ([21], [22], [23], [24]), 2) modelling the constraints inside the algorithm to find grasping poses ([25], [26], [27], [28]). Taking into account the necessity to use a model of the object in order to identify grasping poses, the first group could be split into two additional subgroups: model-based and sensor-based.

Multiple approaches have been proposed to identify optimal grasping poses in environments without constraints. If

the object model is available, swept volumes and continuous collision detection ([29]) or independent contact region algorithm ([30]) are proposed to identify a handling pose. Force closure [21] and form closure index [31] optimization could be considered a valid offline method to collect high quality grasping poses. In [22] a real-time algorithm is proposed to collect stable grasping poses.

In [32] and [33] the authors design an optimization algorithm in order to identify suitable grasping poses taking in account optimal contact force distribution constraints. The environment constraints and hand kinematic are not considered in this work. A different approach is presented in [34], where support functions and wrench oriented grasp quality measures are used; this solver is not tested in a real scenario where a cluttered environment restricts feasible grasping poses.

2.3. Grasping without object model

If a prior object model is not available, then a complementary approach can be employed, which aims to detect feasible grasping poses, exploiting sensor data in the scene.

Information from a synthetic data set, RGB-D sensor and grasp quality Neural Network is used to identify in real-time reliable grasping pose in [35] and [36]. Usually, good performance is only achieved after extensive neural network training with a very large dataset.

Uncertainty from the sensor or subsequent processing could affect these methods; however, one solution to this problem is proposed in [23], which exploits Gaussian Process Implicit Surfaces and Sequential Convex programming. Also, human grasping strategies can reduce the grasping control technique complexity by exploiting tactile sensing to modulate the contact forces in grasping and releasing actions ([24]) or by mapping robot optimal grasping pose from human handling strategy as captured in video recordings ([37]).

2.4. Grasping in constrained environments

Modelling the constraints directly in the search algorithm is a valid alternative to filtering grasping poses by constraints and has the beneficial property that infeasible but otherwise high-quality grasping poses are not being identified and discarded, and hence it is more likely that a good enough feasible solution will be found. Following the concept above, a holistic approach is proposed by animation industry to identify reliable kinematic chain configurations in a constrained environment. The method is called cost index optimization, is subject to linear and nonlinear constraints, and is presented and tested on humanoid characters in ([38] and in [39]). For robotics applications, stable holding poses in constrained environments are achieved by exploiting simulation and shape primitives in the open-source platform called Graspit! ([25]). If a complete environmental knowledge is available, an accurate simulation tool can be developed using multi-body dynamics tools in order to avoid collision [26], for example with a soft humanoid hand. This approach can be time-consuming; however, decomposing the problem in multiple low dimensional spaces can improve performance [40]. In some applications, one important constraint that needs to

be considered relates to avoiding collisions with objects in the scene. This goal could be achieved, as shown in [41], with a motion constraint graph that allows the identification of object surfaces which are reachable by the gripper. This method, however, does not provide information about the grasping quality. A more general solution is provided in [27], where a grasp scoring function is proposed in order to evaluate the handling pose quality, taking into account the distance of the gripper from the other objects in the scene. A different solution is proposed in [28] where visual feedback is used to evaluate constraints and their positions, and to update the proposed grasping pose. If the handling system could collide with other objects in the scene, a trajectory can be planned to reach and to grasp a desired object by pushing and moving the others as shown in [42].

In recent studies [43], [44] environment constraints are exploited to perform grasping tasks; this approach is promising for application with compliant hand in an environment where no risks are caused by interactions between the manipulation system and the environment; however, may apply to a wider range of situations.

3. Problem Definition

3.1. Background: Legacy glovebox

In the nuclear industry, for safe handling of hazardous objects/material, gloveboxes are used where an operator performs a task reaching through the ports which can be seen in Figure 1.

Despite the variety of objects and tools used in gloveboxes, most of the manipulated objects can be approximated with spherical and cylindrical geometries. In effect, in [12] the authors are focused on the problem to grasp and manipulate cans and pucks, in [45] spherical objects are manipulated to accomplish direct oxide reduction and automated bag-out operations, often it is requested to interact with plutonium pits and pipes.

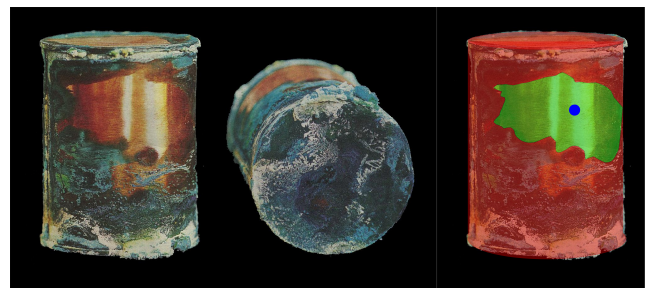


Figure 2: An example of oxidized waste can with high (red) and low (green) corrupted regions with a desired contact point (blue) inside the graspable region.

For the high levels of radiation and wear, the manipulated objects are often corroded/contaminated [46]; therefore, a secure grasp can be achieved by using the non-corroded surfaces and by touching the containers on desired contact points (Figure 2); hence limiting the number of grasp configurations. In this setting, the manual operations performed

by the operators benefit from the dexterity of the human hand and achieve a secure grasp by adapting the hand posture and position in functional way to the specific task.

3.2. Robotic glovebox

Novel technologies in robotics and artificial intelligence can be exploited to increase the safety in the legacy glovebox or to design new robotic gloveboxes; in both cases, dexterous robotic manipulators, sensors and control algorithms can avoid the direct contact between the operator and hazardous material.

Inside the unstructured environment of gloveboxes, the robots could be controlled by the operator via teleoperation while more autonomous control strategies could be exploited in more standard tasks. Robot arms could be profitably used to accomplish operations that are performed by the operator in order to reduce the workload and the risks of accident or contamination. Usually, inside the glovebox the workspace is limited and it is mandatory to identify robotic arm configurations that avoid collision with glovebox structure while ensuring: 1) to reach the objects to grasp, 2) to touch the object on safe regions, 3) to apply correct contact force distribution.

3.3. Problem Definition

In a nuclear industrial environment, several grasping and manipulation operations could be executed in autonomy by robots, in this scenario, a challenging problem is identifying arm configurations that avoid collisions between the robot and the glovebox walls while ensuring feasible and reliable grasps of cylindrical (see Figure 1) and spherical objects. The force distribution problem has to be evaluated also with simpler manipulation systems as gripper in order to ensure the correct compensation of the weight of the object while avoiding contact force magnitudes that are non-feasible (outside the friction cone) or dangerous for the integrity of the object.

This work proposes an algorithm to identify optimal grasping pose and contact force distribution to ensure feasible grasp of known objects with modelled manipulation systems. Desired contact points on the grasped object are used as input to the algorithm in order to identify grasp poses that are functional to the task. In case of repetitive tasks, it is possible that the desired contact points are not reachable because the surface is damaged, in this case, the algorithm has to identify the optimal grasping pose in feasible contact regions, as shown in Figure 3.

In order to test the algorithm outcomes in a scenario that is similar to industrial requirement, a glovebox mock-up was integrated with a manipulator arm (Kinova Gen3) provided with a gripper (Robotiq 2F-85).

4. Optimal Grasping Algorithm

4.1. Robotic Hand Model

In order to provide a more general approach in this paper the theory about compliant manipulation system is taken into account.

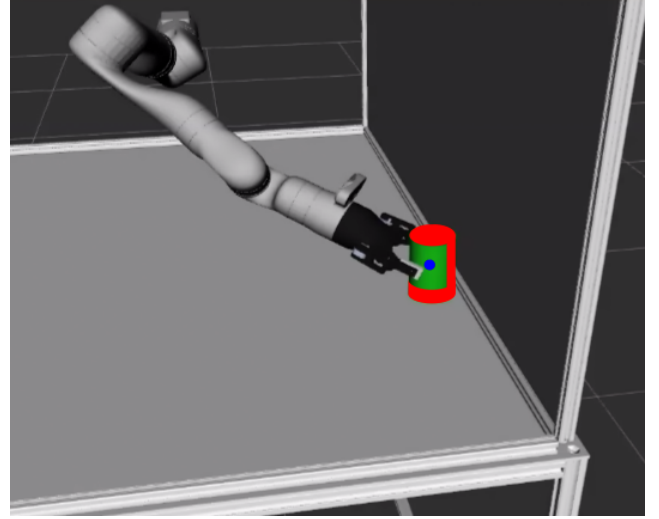


Figure 3: An example of feasible grasping pose on desired contact regions (green) avoiding contacts with possible corrupted surfaces (red) of the object. Desired contact points (functional for the task and fixed a priori) are plotted in blue. The manipulator pose has to avoid collisions with the glovebox while the gripper position has to ensure a feasible grasp.

The grasping system is modeled following the definition in [47] and [21] with the notation in Table 1. For the sake of clarity and completeness, we have included the balance and congruence equations for hand and object, these equations are fundamental to model interactions in the manipulation system. In this work, for simplicity, we model the contact between the object and the robot fingers with the hard finger model, as consequence three contact force components are generated for each contact point. We define c_p as the number of contact points, $c = 3c_p$ as the dimension of the contact force/torque vector (due to the hard finger assumption), $\tau \in \mathbb{R}^n$ as the joint torque vector, $f \in \mathbb{R}^c$ as the contact force vector, $\xi_f \in \mathbb{R}^c$ as the twist of the contact points on the fingers and $q \in \mathbb{R}^n$ as the joint angles.

The congruence equation for the hand with n DoFs, which contacts an object in c_p points:

$$\tau = J^T f, \quad \xi_f = J \dot{q}, \quad (1)$$

where $J \in \mathbb{R}^{c \times n}$ is the hand Jacobian matrix.

Similarly, the balance and congruence equations for the object are defined as:

$$w_e = G f, \quad \xi_o = G^T \xi_e \quad (2)$$

where $G \in \mathbb{R}^{6 \times c}$ is the grasp matrix, $w_e \in \mathbb{R}^6$ is the object wrench, $\xi_o \in \mathbb{R}^6$ is the twist of the contact points on the object and $\xi_e \in \mathbb{R}^6$ is object twist.

The structural compliance $C_s = (1/k_{\text{stru}})I_{c \times c} \in \mathbb{R}^{c \times c}$ is combined with the joint compliance $C_q = (1/k_{\text{ss}})I_{n \times n} \in \mathbb{R}^{n \times n}$ in order to obtain the hand elasticity $K = (C_s + J C_q J^T)^{-1}$. Contact forces are generated in the model through the effect of the stiffness matrix K and virtual displacements between contact points on the object and finger.

Notation	Definition
$n \in \mathbb{R}$	number of contact points
$c_p \in \mathbb{R}$	number of contact points
$c \in \mathbb{R}$	dimension of the contact force/torque vector
$\tau \in \mathbb{R}^n$	joint torques
$q \in \mathbb{R}^n$	joint angles
$q_r \in \mathbb{R}^n$	joint reference angles
$f \in \mathbb{R}^c$	contact force/torque vector
$w_e \in \mathbb{R}^6$	object wrench
$\xi_e \in \mathbb{R}^6$	object twist
$\xi_f \in \mathbb{R}^c$	twists of the contact points on the fingers
$\xi_o \in \mathbb{R}^c$	twists of the contact points on the object
$J \in \mathbb{R}^{c \times n}$	hand Jacobian matrix
$G \in \mathbb{R}^{6 \times c}$	grasp matrix
$k_{stru} \in \mathbb{R}$	structural stiffness
$k_{ss} \in \mathbb{R}$	joint stiffness
$C_{stru} \in \mathbb{R}^{c \times c}$	structural compliance matrix
$C_{ss} \in \mathbb{R}^{n \times n}$	joint compliance matrix
$K \in \mathbb{R}^{c \times c}$	stiffness matrix
$G_K^R \in \mathbb{R}^{c \times 6}$	K -weighted pseudo-inverse of G
$s \in \mathbb{R}$	number of synergies
$\delta\sigma \in \mathbb{R}^s$	synergistic displacement
$S \in \mathbb{R}^{n \times s}$	synergy matrix
$\delta f_p \in \mathbb{R}^c$	particular solution
$\delta f_{hrs} \in \mathbb{R}^c$	active internal forces
$\delta f_{hos} \in \mathbb{R}^c$	passive (preload) internal forces
$F_s \in \mathbb{R}^{c \times s}$	map of $\delta\sigma$ into active internal forces δf_{hrs}
$e_s \in \mathbb{R}$	rank of F_s
$E_s \in \mathbb{R}^{c \times e_s}$	basis of the range space of F_s
$y \in \mathbb{R}^{e_s}$	parameterizing vector of the active internal forces
$\mu_s \in \mathbb{R}$	static friction coefficient
$f_{min} \in \mathbb{R}$	minimum value of forces component in f
$f_{max} \in \mathbb{R}$	maximum value of forces component in f
$com \in \mathbb{R}^3$	center of mass of the object
$\bar{c}_i \in \mathbb{R}^3$	desired contact point
$c_i \in \mathbb{R}^3$	real contact point
$l \in \mathbb{R}$	number of arm joint
$q_a \in \mathbb{R}^l$	arm joint angles
$m \in \mathbb{R}$	number of contact parameter
$q_c \in \mathbb{R}^m$	contact parameter
$n_i \in \mathbb{R}^3$	normal vector to the contact surface (i^{th} point)

Table 1
Notation for grasp analysis.

We consider synergies as coordinated movements of the finger due to mechanical coupling of the hand fingers. A relation between the synergy input displacements $\delta\sigma \in \mathbb{R}^s$ and the joint reference displacements δq_r can be formalised as

$$\delta q_r = S \delta\sigma \quad S \in \mathbb{R}^{n \times s} \quad (3)$$

where $1 \leq s \leq n$. A new equilibrium configuration q , due to the effect of joint compliance C_q , can be reached by the hand due to the effect of the compliance:

$$\delta q = \delta q_r - C_q \delta\tau. \quad (4)$$

It's worth to note that the equations (1), (2), (3), that strictly derive from the manipulation system kinematics, allow to model grasping system with multiple fingers and contact points; more details about these aspects are provided in [48] and [47].

4.2. Grasping contact force optimization

In grasping systems with compliant contact and joints, as described in [21], the particular solution δf_p , the active

internal forces δf_{hrs} and the passive (or pre-load) internal forces δf_{hos} contribute on the contact force distribution:

$$f = \delta f_p + \delta f_{hrs} + \delta f_{hos} \quad (5)$$

The particular solution has direct relation to the external wrench $w_e \in \mathbb{R}^6$:

$$\delta f_p = G_K^R w_e, \quad \text{with } G_K^R = K G^T (G K G^T)^{-1} \in \mathbb{R}^{c \times 6} \quad (6)$$

The active internal forces, which can be combined to squeeze the objects, can be computed as:

$$\delta f_{hrs} = E_s y \quad (7)$$

where E_s is the active internal force base matrix and $y \in \mathbb{R}^{e_s}$ is a vector that combines the active internal forces.

In this paper the passive internal forces are considered null, with no loss of generality.

As described in [3] and [47] the y element can be achieved by optimizing a suitable index cost. In particular given a grasping configuration, it is possible to identify an optimal force distribution by minimizing a convex function that can be composed from G_K^R , E_s , an object wrench $w \in \mathbb{R}^6$, minimum/maximum contact force value f_{min} and f_{max} .

With more details the grasping force optimisation problem is set up as:

$$y^* = \arg \min_y V(w, y) \quad (8)$$

where $V(w, y)$ is a convex function defined in [3]. The function $V(w, y)$ is defined as sum of terms that model: i) the friction cone constraints, ii) maximum and minimum value of normal force at contact, iii) constraints to ensure the contact force distribution equilibrium. For a given grasping pose, the minimum value of $V(w, y)$ is evaluated with the optimal contact force distribution.

In this work, the optimisation of the forces is a nested optimisation task of an additional optimisation routine to find feasible contact points between the object and the manipulation system.

4.3. Algorithm Implementation

As defined in the literature, the grasp planning solver identifies contact points on a desired object that ensure feasible grasping. In particular, two conditions are required for this process:

1) "A Feasible Pose" has to be identified before applying grasping forces in order to ensure that the manipulation system satisfies the constraints of the environment, for example, the feasible pose must include no contact with the wall or with other objects in the environment.

2) "Force Closure" has to be guaranteed when the manipulation system applies grasping forces in order to maintain stable holding, without damage to the object.

Depending on the manipulation system properties, object properties and environmental constraints, the problem described above may have no solution, one solution or multiple solutions. Two independent indices can be provided in

order to evaluate the force closure quality and feasible pose quality. The force closure quality can be evaluated by the cost function $V(w, y)$ as described in [21], for the feasible pose we can define an index cost that evaluates the distance between desired (a priori) contact points, \bar{c}_i , on the object and the real contact points between the object and the robot fingertip, c_i . Our formulation is as follows:

$$\Phi(c_1, \dots, c_{c_p}) = \sum_{i=1}^{c_p} (\|\bar{c}_i - c_i\|)^2 \quad (9)$$

The value of Φ will be zero if contact point positions are equal to desired contact point positions. The contact point positions c_i are mapped by the forward kinematics of each finger of the hand as shown in [48].

To evaluate the quality of the pose and the grasp, we define an index cost as:

$$U = \Phi(c_1, \dots, c_{c_p}) + kV(w, y) \quad (10)$$

where k is a weight that modulates the effect of the force cost index on the total cost index. The index V is an dimensionless and positive definite cost index. The index $V(w, y)$ has a global minimum value because the function is convex, on the contrary, the Φ function is not regular and multiple local minima could exist. For the reason above, it is important to note that the total cost index U is not convex and multiple local minima can exist. The cost index U is defined in order to model grasp with multiple fingers because the Φ component and $V(w, y)$ component are defined taking in account the forces at each contact points and the kinematics of the hand. The Φ component allows to penalise the hand configuration with contact points that are far from desired contact points on the objects; this aspect is used to identify grasping poses that are functional to the task as the operator grasps the same object in different positions for different operations.

4.4. Grasp planning optimization

For a grasping manipulation system, assume the following information is given:

- A robot manipulator model (kinematic, joint stiffness, contact stiffness and friction) formulated as in [47]
- Information relating to the object to be manipulated: shape, stiffness, centre of mass of the object (*com*) and grasping regions.
- Desired contact points ($\bar{c}_1, \dots, \bar{c}_{c_p}$) on object surface

We define arm joint vector as $q_a = [q_1^a, \dots, q_l^a]^T$ where l is the number of joints in the arm. The contact point positions on the link are modeled with $q_c = [q_1^c, \dots, q_m^c]^T$ where m is the number of parameter used to map the contact points on the phalanx surface. It is worth to note that $m \leq c$.

The variables q_a, σ, q_c, y are collected in vector Q with $v = l + s + m + e_s$ dimension as follow:

$$Q = [q_a, \sigma, q_c, y]^T \quad (11)$$

The cost index U , proposed as metric to evaluate grasping pose quality, is a function of (c_1, \dots, c_{c_p}) variables those are mapped from Q variable vector by the forward kinematics relation; therefore we can write $U(Q)$. In order to ensure stable and feasible grasping poses, the Q vector can be found by minimizing the $U(Q)$ cost index:

$$Q^* = \arg \min_Q U(Q) \quad (12)$$

The optimization is constrained by a set of linear/non-linear equalities and inequalities:

- range limits of vector Q

$$\begin{cases} q_{min}^a < q_i^a < q_{max}^a & i = 1, \dots, l; \\ \sigma_{min} < \sigma_i < \sigma_{max} & i = 1, \dots, s; \\ q_{min}^c < q_i^c < q_{max}^c & i = 1, \dots, m; \end{cases} \quad (13)$$

- finger and object tangent conditions

$$F(x_{c_i}, y_{c_i}, z_{c_i}) = 0 \quad i = 1, \dots, c_p; \quad (14)$$

- link and object non interpenetration condition

$$F(x_{l_i}, y_{l_i}, z_{l_i}) \geq 0; \forall (x_{l_i}, y_{l_i}, z_{l_i}) \in P(l_i) \quad (15)$$

- link (hand/arm) and environment non collision condition

$$F(x_{l_i}, y_{l_i}, z_{l_i}) \geq 0; \quad i = 1, \dots, l + n; \quad (16)$$

It is worth noting that $V(w, y)$ includes the following elements:

- Coulomb's inequality

$$\alpha_i \|f_i\| - f_i^T n_i \leq 0 \quad i = 1, \dots, c_p; \quad (17)$$

where $\alpha_i = \frac{1}{1+\mu_s^2}$ and μ_s is the static friction coefficient.

- minimum and maximum values of normal forces

$$\begin{cases} f_{i,min} - f_i^T n_i \leq 0 & i = 1, \dots, c_p; \\ \|f_i\| \leq f_{i,max}; \end{cases} \quad (18)$$

In this work, in order to optimise the cost function and evaluate multiple local minima, a multi-start optimization solver is used.

4.5. Starting point selection

Multiple criteria can be used to select starting point conditions in the optimization research. In this work we propose to collect multiple configurations of the arm in the constrained work space by sampling joint space range values, only feasible configurations need to be stored in a database. Multiple starting conditions can be achieved with an SQL

query that extracts only arm poses that have the wrist position in a region close to the object to grasp. Then, multiple starting conditions are used to run constrained optimizations in parallel, each optimization could converge on local/global minimum values. Optimization outcomes are sorted taking into account the index cost U in order to identify the best local minima that is a global minima candidate. If all the optimizations fail, no grasping pose is identified, this case could happen when the problem is high constrained or when the object is located in a work space region that is impossible to reach by the manipulator.

The pseudocode for the optimal grasping algorithm is presented in Algorithm 1. In the next section, the strategy described above is tested to generate the grasping configurations of manipulation system inside a constrained environment as glovebox mock-up.

Algorithm 1: Optimal grasping algorithm

Data:

- Sphere/cylinder model and centre of mass position (com)
- Desired contact points on the object
- Desired grasping region on the object
- Robot kinematics and model
- Environment geometry

Result: Optimal arm configuration, synergy, contact point and grasping force Q^*

$initial\ points \leftarrow$ (SQL query) SELECT robot arm configurations WHERE wrist position is in a bounded region around the object com ;

foreach $Q_i \in initial\ points$ **do**

$$\min_Q U(Q)$$

- s.t. environment geometry,
robot kinematics,
force distribution constraints

;

$Q^* = Q_i^*$ which leads to the minimum $U(Q_i^*)$ from the previous step;

5. Experimental Setup

5.1. Manipulation System

This section presents the setup that was used to test the algorithm presented above.

The manipulation system is composed of a Kinova Gen3 Arm (7 DoFs) and a finger gripper (2F85 Robotiq) mounted on the wrist of the arm; the manipulator was installed in a glovebox mock-up, providing a confined space representative of realistic application environments, as show in Figure 1.

A kinematic models of the arm and the left finger of the

l_i	b (mm)	$-\beta$ (rad)	a (mm)	α (rad)	d (mm)	θ (rad)
0	0	0	0	π	156.4	0
1	-5.4	0	0	$\pi/2$	-128.4	q_1^a
2	-210.4	0	0	$-\pi/2$	-6.4	q_2^a
3	-6.4	0	0	$\pi/2$	-210.4	q_3^a
4	-208.4	0	0	$-\pi/2$	-6.4	q_4^a
5	0	0	0	$\pi/2$	-105.9	q_5^a
6	-105.9	0	0	$-\pi/2$	0	q_6^a
7	0	0	0	π	-61.5	q_7^a

Table 2

D.H. parameters for Kinova Gen3 arm.

l_i	a (mm)	α (rad)	d (mm)	θ (rad)
1	57.3	0	0	q_1^h
2	43.7	0	0	q_2^h

Table 3

D.H. parameters for Robotiq 2F85 gripper.

gripper were achieved by D.H. convention, with D.H. parameters defined in Table 2 and in Table 3.

The kinematic model of the right finger uses the D.H. table (Table 3) pre-multiplied by a fixed transformation matrix with translation amount (25.2 mm) on the x-axis; for both fingers, the synergy matrix is defined as:

$$S = [0.5, -0.5, -0.5, 0.5]^T. \quad (19)$$

Taking into account the manipulation system kinematic, the optimisation is constrained by a set of linear/non linear equalities and inequalities:

- joint range limits:

$$q_{min}^a = [-6.283, -2.094, -6.283, -2.443, -6.283, -1.919, -6.283]^T \text{ rad}, q_{max}^a = [6.283, 2.094, 6.283, 2.443, 6.283, 1.919, 6.283]^T \text{ rad}, \sigma_{min} = 1.570 \text{ rad}, \sigma_{max} = 2.119 \text{ rad}, q_{min}^c = [-43.7, -43.7]^T \text{ mm}, q_{max}^c = [0, 0]^T \text{ mm},$$

- upper and lower values to model the contact point position on the gripper phalanges:

$$-43.7 \leq c_i \leq 0 \quad i = 1, \dots, c_p; \quad (20)$$

The gripper fingers are covered by a layer of rubber in order to increase the grasping capabilities. We assume a static friction value $\mu_s = 0.9$ that is comparable with the rubber and aluminium static friction at contact. The angle of friction is equal to 41.98° .

In the force optimization routine we assume minimum value of normal forces $f_{1,min} = f_{2,min} = 0,001$ N, maximum value of normal forces is $f_{1,max} = f_{2,max} = 100$ N and $K_{ss} = 10^5$ Nmm/rad as joint stiffness.

5.2. Objects

The algorithm is tested with a spherical and cylindrical objects, for both of them we assume that:

- sphere/cylinder radius r ,

- desired contact points as $\bar{c}_1 = [com_x, com_y + r, com_z]$ and $\bar{c}_2 = [com_x, com_y - r, com_z]$,
- the weight is the only component of the external wrench that is modeled as: $w_e = [2, 0, 0]^T$ N. We used $K_{stru} = 10$ N/mm as stiffness of the material.

5.2.1. Sphere

For a spherical object the following constraints have to be added in the optimization routine.

- link and object tangent conditions

$$\|c_i - com\|^2 = r^2 \quad i = 1, 2 \quad (21)$$

- link and object non interpenetration conditions

we define $F(x_{l_i}, y_{l_i}, z_{l_i})$ as the distance between com and gripper phalanx contact plane.

5.2.2. Cylinder

The parameter h models the cylinder height, in this case a different set of equalities/inequalities has to be evaluated in the optimization:

- link and object tangent conditions

$$F(x_{c_1}, y_{c_1}) = 0; \quad F(x_{c_2}, y_{c_2}) = 0; \quad (22)$$

- link and object non interpenetration conditions

$$F(x_{l_i}, y_{l_i}) \geq 0; \quad \forall (x_{l_i}, y_{l_i}) \in P(l_i) \quad (23)$$

with

$$F(x_{l_i}, y_{l_i}) = (x_{l_i} - x_0)^2 + (y_{l_i} - y_0)^2 - R^2 \quad (24)$$

where (x_0, y_0) is the center position on the circular face.

5.3. Software architecture

The algorithm is developed in C++ using NLOpt library with solver NLOPT_LN_COBYLA that is local and derivative free algorithm. The arm configurations in the workspace (21×10^6 poses) are collected in a database stored in Microsoft SQL Express 2019. All the simulations run on a desktop PC equipped with Intel i7700 CPU 3.60 GHz and 16 Gb RAM.

6. Validation of the Algorithm

6.1. Simulations Results

In order to test the algorithm multiple simulations are evaluated with object in different positions and $k = 1$; an high value of k is necessary to decrease the effect of contact positions on the total cost index. Each simulation terminated after 10 - 12 hours.

6.2. Sphere Grasp

Starting from 1304 arm configurations, that are generated by the SQL query, a total of 722 reliable poses are identified by the optimization algorithm. For each pose the cost index values are shown in Figure 4. The lowest index cost values $U = 2.178$, sum of $\Phi = 3.5 \times 10^{-5}$ and $V = 2.178$, is generated from optimization variable values (q_a, σ, q_c, y) in Table 4 (Sim. 1). The manipulation pose satisfies the environment constraints as show in Figure 5 and the contact force distribution, generated from q, q_r, f_1, f_2 in Table 5 (Sim. 1), is shown in Figure 6.

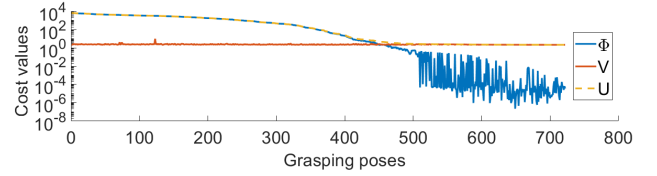


Figure 4: Index cost values sorted in descending order.

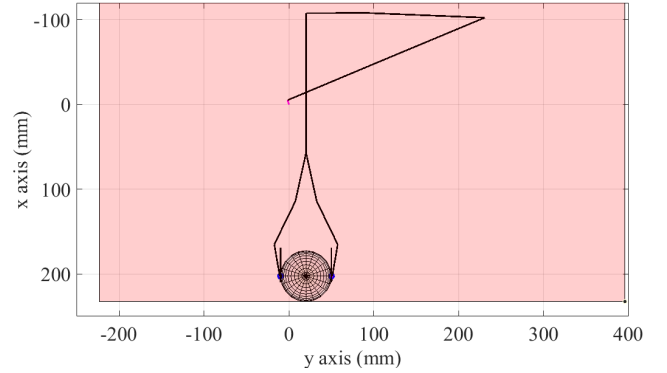


Figure 5: Manipulation pose at minimum value of U.

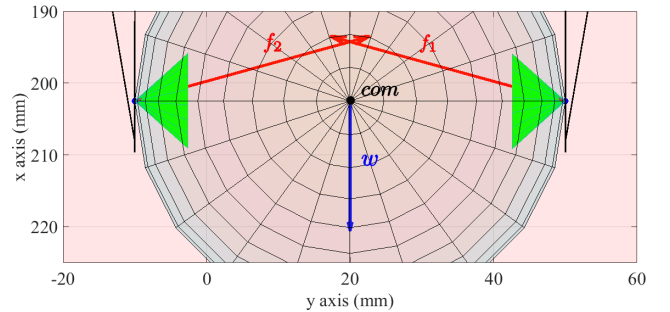


Figure 6: Contact force distribution composed by contact forces (red) at fingers and sphere weight (blue). Friction cone are plotted in green.

6.3. Cylinder Grasp

In this section we present the result about cylinder grasping in three different conditions.

CASE 1: The algorithm identifies 479 reliable grasp poses (1304 starting poses), the cost index values are shown in Figure 7. The lowest index cost values $U = 5.094$, sum of

$\Phi = 2.912$ and $V = 2.181$, is generated from optimization variable values (q_a, σ, q_c, y) in Table 4 (Sim. 2). The manipulation pose satisfies the environment constraints as show in Figure 8 and the contact force distribution, generated from q, q_r, f_1, f_2 in Table 5 (Sim. 2), is shown in Figure 9.

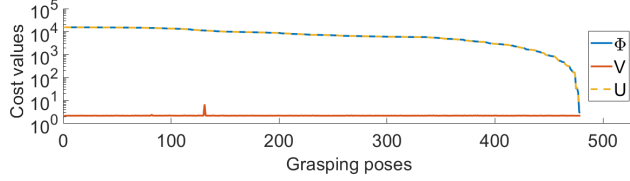


Figure 7: Index cost values sorted in descending order for cylinder grasping task (CASE 1).

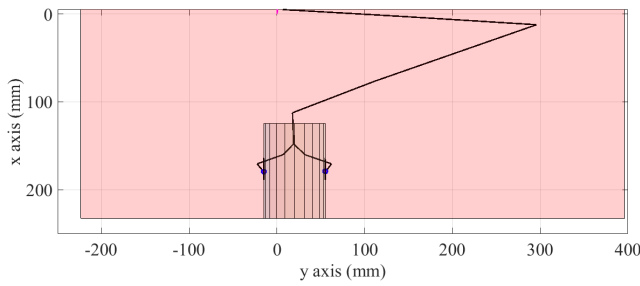


Figure 8: Manipulation pose at minimum value of U (CASE 1).

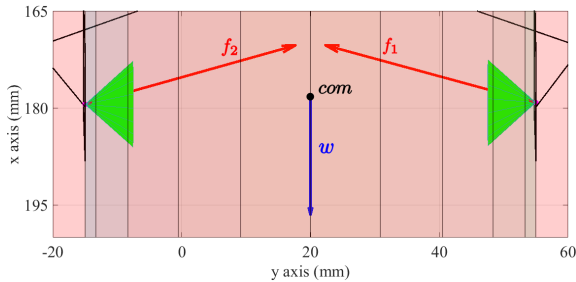


Figure 9: Contact force distribution (CASE 1) composed by contact forces at fingers (red) and cylinder weight (blue). Friction cone are plotted in green.

CASE 2: We test the algorithm to grasp the cylinder in a position close to one of the bounding box wall, this configuration increase the number of constraints and reduce the number of feasible poses.

A total of 101 reliable poses are found from a 1304 starting configurations, the index cost values are shown in Figure 10. The manipulation pose, in Figure 11, satisfies the environment constraints with the lowest index cost values $U = 3.738 \times 10^3$, sum of $\Phi = 3.736 \times 10^3$ and $V = 2.195$. The optimization variable values (in Table 4 - Sim. 3) and the contact force distribution (in Table 5 - Sim. 3) contribute to ensure feasible grasp.

CASE 3: Limited contact region on the cylinder is selected and modeled with constraints in the optimization algorithm. Starting from 1304 arm configurations (from SQL

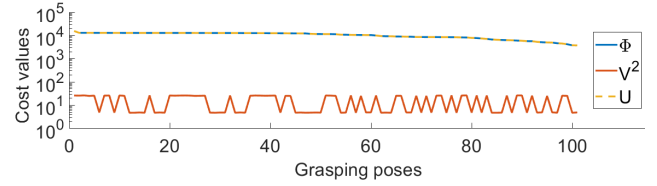


Figure 10: Index cost values sorted in descending order for cylinder grasping task (CASE 2).

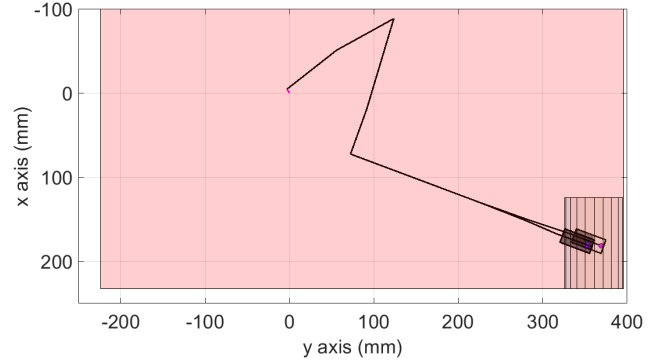


Figure 11: Grasping pose with minimum index cost U (CASE 2).

query), 507 reliable grasping poses are identified, the index cost values are shown in Figure 12. The limited contact region on the object and the manipulation pose, in Figure 13, satisfies the environment constraints with the lowest index cost values $U = 2.410 \times 10^3$, sum of $\Phi = 2.408 \times 10^3$ and $V = 2.198$. The optimization variable values (in Table 4 - Sim. 3) and the contact force distribution (in Table 5 - Sim. 3) contribute to ensure feasible grasp. It's worth to note that the contact points are close to the contact region limit in order to be close to the desired contact points.

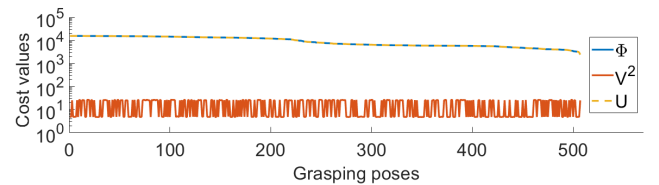


Figure 12: Index cost values sorted in descending order for a cylinder with a limited contact region on the object (CASE 3).

6.4. Grasping Pose Experiments

The optimal and sub-optimal configurations collected by the algorithm are finally tested on the real robot. The object to grasp is an aluminium can that is used to define the physical properties in the simulation in Section 6.1. Four grasping poses with different U cost values are selected: A) $U = 1.317 \times 10^4$, $\Phi = 1.316 \times 10^4$, $V = 2.224$, B) $U = 7.307 \times 10^3$, $\Phi = 7.305 \times 10^3$, $V = 2.179$, C) $U = 5.253 \times 10^3$, $\Phi = 5.251 \times 10^3$, $V = 2.179$, D) $U = 5.094$, $\Phi = 2.912$, $V = 2.181$

All the grasps are successfully accomplished with the

	q_a (rad)	σ (rad)	q_c (rad)	y (mm)
Sim.1	$[1.224, -0.638, 0.231, 1.344, 1.899, -1.698, 0.737]^T$	2.017	$[-5.760, -5.730]^T$	5.055
Sim.2	$[1.671, -0.785, -0.471, 1.937, 6.155, -1.168, 1.857]^T$	2.116	$[-3.236, -1.938]^T$	-5.111
Sim.3	$[0.989, -0.362, 2.711, -0.875, 4.343, -1.407, -3.642]^T$	2.116	$[-2.862, -6.268]^T$	5.087
Sim.4	$[-0.149, -0.307, 2.512, -0.254, 0.750, -1.668, 1.428]^T$	2.116	$[-5.496, -2.417]^T$	4.987

Table 4

Components of the Q vector at the minimum value of the index cost U for each simulation case.

	q (rad)	q_r (rad)	f_1 (N)	f_2 (N)
Sim.1	$[2.017, -0.446, -0.638, 0.446]^T$	$[2.004, -0.433, 1.137, 0.433]^T$	$[-1.000, -3.631, 0.000]^T$	$[-0.999, 3.631, -0.000]^T$
Sim.2	$[2.116, -0.546, -0.785, 0.546]^T$	$[2.104, -0.534, 1.036, 0.534]^T$	$[-0.985, -3.630, 0.092]^T$	$[-1.014, 3.630, -0.092]^T$
Sim.3	$[2.116, -0.545, -0.362, 0.545]^T$	$[2.104, -0.533, 1.036, 0.533]^T$	$[-1.062, -0.872, 3.527]^T$	$[-0.937, 0.872, -3.527]^T$
Sim.4	$[2.116, -0.545, -0.307, 0.546]^T$	$[2.105, -0.534, 1.036, 0.534]^T$	$[-0.840, -3.630, -0.029]^T$	$[-1.159, 3.630, 0.029]^T$

Table 5

The joint values (q), reference joint values (q_r) and contact force values (f_1, f_2) in the new equilibrium configuration for each simulation case.

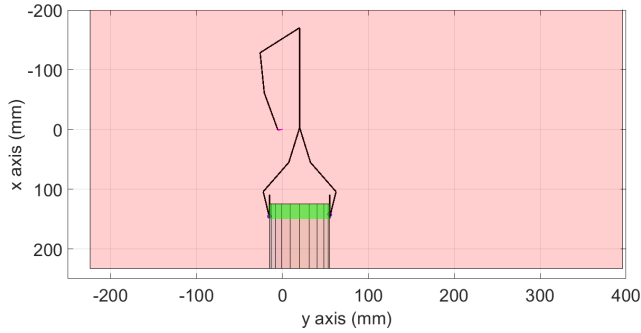


Figure 13: Grasping pose with minimum index cost U for a cylinder (CASE 3) with a limited contact region on the object surface (green).

manipulation system setup without collision in the cluttered environment. For all the configurations tested, gripper postures are presented in Figure 14, it is worth to note that pose D is the optimal grasping configuration described in the section. A video is provided by the authors (Video) in order to show the grasping actions for all the configurations above.

7. Result Discussion


For all the test cases, the simulations and the experimental results corroborate the usability of the described strategy that identifies multiple grasping poses in a constrained environment such as a glovebox mock-up.

In Section 6.2 and 6.3/CASE 1, the physical constraints don't prevent to grasp the object on the desired contact points, in both the cases the algorithm optimizes the grasping poses in order to ensure a small distance between the real contact points and the desired contact points.

In Section 6.3/CASE 2, two glovebox walls constraint the feasible grasping poses of the arm, in particular, it is impossible to reach the desired contact points. Also in these conditions, the algorithm identifies several poses to grasp the object in order to minimize the distance between the real contact points and the desired contact points.



(a) Grasping pose A



(b) Grasping pose B



(c) Grasping pose C



(d) Grasping pose D

Figure 14: The four grasping poses tested with the manipulation setup.

CASE 3 shows the usability of the strategy when limited contact surfaces are allowed on the object; for example, if the object is damaged or corrupted. In this case, the algorithm accepts only the solutions that have contact points on a limited region on the object surface, while the distance between the desired contact points and the real contact points is minimized as possible.

In all the tests the starting points are collected with a query from the same database with a collection of configurations of the arm. This is an important aspect to highlight because the workspace could be generated only one time and associated with the glovebox environment in order to save time.

Simulation results highlight that the principal contributor of the total index cost is the distance between real contact points and desired contact points if the weight value $k = 1$. This aspect pushes the optimization process to find grasping solutions that are close as possible to the desired contact positions, but a higher value of k could be used to find high quality grasps far from desired contact point positions.

The algorithm is designed to be executed offline because the process is time-consuming, but increasing the number of cores can decrease the computation time in order to have more fast feedback for the operation.

Compared with other solution ([25]), our strategy allows identifying feasible configurations of the robot in order to have contact points those are close to desired contact points, additionally custom equality/inequality could be exploited to plan restricted contact region on the object/robot surfaces. The correctness of the model can ensure the grasping of the object, that is not guaranteed by techniques that are not based on the model ([35] and [36]). Compared with solutions that use optimization strategies ([32] and [33]) this work extends and tests the optimization algorithm in order to be used inside a constrained environment. Errors in the model could affect the capability of the algorithm, this problem could be mitigated by using margins in the algebraic constraints. The optimal grasping poses could be exploited to train a machine-learning algorithm to identify a map between the object properties and grasping pose variables. It's worth to note that the trajectory of the manipulator is not evaluated in the optimization process, and multiple objects are not included in the test scenario.

8. CONCLUSIONS

In this work, we present a strategy to minimise a suitable index cost to synthesise optimal grasping poses within constrained environments (such as glovebox) for a robotic manipulation system. Previous studies and different approaches are argued in order to provide: i) an overview about the importance of robotics in nuclear activities and robotic glovebox, ii) a multidisciplinary perspective about the state of the art on grasping synthesis in cluttered/no-cluttered environment. The limits of the legacy glovebox are presented in order to highlight the benefits and the challenges of autonomous grasp inside a robotic glovebox. In order to provide the necessary knowledge to describe the proposed grasping strategy, the robotic hand model and the contact force distribution are described briefly, later we define a novel cost index that can evaluate the grasp quality as the sum of two different components: grasping pose and contact force distribution. A strategy, with nested optimization (of which one constrained) routines, is presented in order to provide optimal and suboptimal grasping poses by minimizing the proposed cost index; the environment constrains are modelled in the algorithm as linear/nonlinear equalities/inequalities. Simulation results identify the optimal/suboptimal grasping poses for two object primitives as a sphere and cylinder in a cluttered environment as glovebox mockup; after, several grasping configurations, that were previously collected in

simulations, are tested on a real manipulation system with success.

All the results are discussed providing some comparisons with other grasp planning algorithms to highlight the benefits and disadvantages of the algorithm proposed. In order to improve the capability of the presented algorithm, next research activities will explore possible solutions to evaluate criteria about optimal trajectory of the manipulator and to include multiple objects inside the glovebox. Additionally, objects with more complex shape will be investigated in order to generalise the presented work.

Acknowledgement

The authors would like to thank Guy Burroughes for the availability and the feedback provided on the work. His technical support was fundamental to use virtual reality and robotics set-up.

9. Bibliography

References

- [1] M. Akiyama, Research and development on decommissioning of nuclear facilities in japan, Nuclear engineering and design 165 (1996) 307–319.
- [2] R. Skilton, N. Hamilton, R. Howell, C. Lamb, J. Rodriguez, Mascot 6: Achieving high dexterity tele-manipulation with a modern architectural design for fusion remote maintenance, Fusion Engineering and Design 136 (2018) 575–578.
- [3] A. Bicchi, On the closure properties of robotic grasping, The International Journal of Robotics Research 14 (1995) 319–334.
- [4] E. Grasz, M. Perez, Addressing nuclear and hostile environment challenges with intelligent automation, Technical Report, Lawrence Livermore National Lab.(LLNL), Livermore, CA (United States), 1997.
- [5] T. Rollow, Type a accident investigation of the march 16, 2000 plutonium-238 multiple intake event at the plutonium facility, los alamos national laboratory, new mexico, united states department of energy, office of oversight, Safety and Health (2000).
- [6] D. Hagemeyer, Y. McCormick, DOE 2011 Occupational Radiation Exposure report, _Prepared for the US Department of Energy, Office of Health, Safety and Security. December 2012, Technical Report, Oak Ridge Inst. for Science and Education (ORISE), Oak Ridge, TN (United States), 2012.
- [7] D. K. Wehe, J. Lee, W. R. Martin, R. Mann, W. Hamel, J. Tulenko, Intelligent robotics and remote systems for the nuclear industry (1989).
- [8] T. A. Harden, J. A. Lloyd, C. J. Turner, Robotics for nuclear material handling at LANL: capabilities and needs, Technical Report, Los Alamos National Lab.(LANL), Los Alamos, NM (United States), 2009.
- [9] G. Pegman, D. Sands, Cost effective robotics in the nuclear industry, Industrial Robot: An International Journal (2006).
- [10] K. D. Peterson, Robotic System for Automated Handling of Ceramic Pucks, Technical Report, Lawrence Livermore National Lab., Livermore, CA (US), 2000.
- [11] C. Foster, Computer Model and Simulation of a Glove Box Process, Technical Report, Los Alamos National Lab., NM (US), 2001.
- [12] C. Turner, J. Pehl, Design of small automation work cell system demonstrations, Technical Report, Los Alamos National Lab., NM (US), 2000.
- [13] M. A. Roa, R. Suárez, Grasp quality measures: review and performance, Autonomous Robots 38 (2015) 65–88.
- [14] A. Kitamura, M. Watahiki, K. Kashiro, Remote glovebox size reduction in glovebox dismantling facility, Nuclear engineering and design 241 (2011) 999–1005.

- [15] M. Talha, E. Ghalamzan, C. Takahashi, J. Kuo, W. Ingamells, R. Stolkin, Towards robotic decommissioning of legacy nuclear plant: Results of human-factors experiments with tele-robotic manipulation, and a discussion of challenges and approaches for decommissioning, in: 2016 IEEE International Symposium on Safety, Security, and Rescue Robotics (SSRR), IEEE, 2016, pp. 166–173.
- [16] A. Sharp, M. W. Hom, M. Pryor, Operator training for preferred manipulator trajectories in a glovebox, in: 2017 IEEE Workshop on Advanced Robotics and its Social Impacts (ARSO), IEEE, 2017, pp. 1–6.
- [17] B. E. O’Neil, Graph-based world-model for robotic manipulation, Ph.D. thesis, 2010.
- [18] A. Ghosh, D. Alonso Paredes Soto, S. M. Veres, J. Rossiter, Human robot interaction for future remote manipulations in industry 4.0, in: IFAC-PapersOnLine, International Federation of Automatic Control (IFAC), 2020.
- [19] A. Ö. Öno, P. Long, T. Padir, Using contact to increase robot performance for glovebox d&d tasks, in: Waste Management Symposia, 2018.
- [20] P. Long, T. Padir, Evaluating robot manipulability in constrained environments by velocity polytope reduction, in: 2018 IEEE-RAS 18th International Conference on Humanoid Robots (Humanoids), IEEE, 2018, pp. 1–9.
- [21] G. Averta, F. Angelini, M. Bonilla, M. Bianchi, A. Bicchi, Incrementality and hierarchies in the enrollment of multiple synergies for grasp planning, IEEE Robotics and Automation Letters 3 (2018) 2686–2693.
- [22] G. Liu, J. Xu, X. Wang, Z. Li, On quality functions for grasp synthesis, fixture planning, and coordinated manipulation, IEEE Transactions on Automation Science and Engineering 1 (2004) 146–162.
- [23] J. Mahler, S. Patil, B. Kehoe, J. Van Den Berg, M. Ciocarlie, P. Abbeel, K. Goldberg, Gp-gpis-opt: Grasp planning with shape uncertainty using gaussian process implicit surfaces and sequential convex programming, in: 2015 IEEE international conference on robotics and automation (ICRA), IEEE, 2015, pp. 4919–4926.
- [24] J. M. Romano, K. Hsiao, G. Niemeyer, S. Chitta, K. J. Kuchenbecker, Human-inspired robotic grasp control with tactile sensing, IEEE Transactions on Robotics 27 (2011) 1067–1079.
- [25] A. T. Miller, S. Knoop, H. I. Christensen, P. K. Allen, Automatic grasp planning using shape primitives, in: 2003 IEEE International Conference on Robotics and Automation (Cat. No. 03CH37422), volume 2, IEEE, 2003, pp. 1824–1829.
- [26] M. Bonilla, E. Farnioli, C. Piazza, M. Catalano, G. Grioli, M. Garabini, M. Gabiccini, A. Bicchi, Grasping with soft hands, in: 2014 IEEE-RAS International Conference on Humanoid Robots, IEEE, 2014, pp. 581–587.
- [27] D. Berenson, R. Diankov, K. Nishiwaki, S. Kagami, J. Kuffner, Grasp planning in complex scenes, in: 2007 7th IEEE-RAS International Conference on Humanoid Robots, IEEE, 2007, pp. 42–48.
- [28] R. Diankov, T. Kanade, J. Kuffner, Integrating grasp planning and visual feedback for reliable manipulation, in: 2009 9th IEEE-RAS International Conference on Humanoid Robots, IEEE, 2009, pp. 646–652.
- [29] Z. Xue, J. M. Zoellner, R. Dillmann, Automatic optimal grasp planning based on found contact points, in: 2008 IEEE/ASME International Conference on Advanced Intelligent Mechatronics, IEEE, 2008, pp. 1053–1058.
- [30] K. Hertkorn, Shared grasping: A combination of telepresence and grasp planning, KIT Scientific Publishing, 2016.
- [31] D. Ding, Y.-H. Liu, M. Y. Wang, S. Wang, Automatic selection of fixturing surfaces and fixturing points for polyhedral workpieces, IEEE Transactions on Robotics and Automation 17 (2001) 833–841.
- [32] S. El Houry, M. Li, A. Billard, Bridging the gap: One shot grasp synthesis approach, in: 2012 IEEE/RSJ International Conference on Intelligent Robots and Systems, IEEE, 2012, pp. 2027–2034.
- [33] S. El-Khoury, M. Li, A. Billard, On the generation of a variety of grasps, Robotics and Autonomous Systems 61 (2013) 1335–1349.
- [34] Y. Zheng, Computing the best grasp in a discrete point set with wrench-oriented grasp quality measures, Autonomous Robots 43 (2019) 1041–1062.
- [35] J. Mahler, J. Liang, S. Niyaz, M. Laskey, R. Doan, X. Liu, J. A. Ojea, K. Goldberg, Dex-net 2.0: Deep learning to plan robust grasps with synthetic point clouds and analytic grasp metrics, arXiv preprint arXiv:1703.09312 (2017).
- [36] S. Kumra, C. Kanan, Robotic grasp detection using deep convolutional neural networks, in: 2017 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), IEEE, 2017, pp. 769–776.
- [37] Y. Lin, Y. Sun, Robot grasp planning based on demonstrated grasp strategies, The International Journal of Robotics Research 34 (2015) 26–42.
- [38] P. Baerlocher, R. Boulic, An inverse kinematics architecture enforcing an arbitrary number of strict priority levels, The visual computer 20 (2004) 402–417.
- [39] X. Shi, K. Zhou, Y. Tong, M. Desbrun, H. Bao, B. Guo, Mesh puppetry: cascading optimization of mesh deformation with inverse kinematics, in: ACM SIGGRAPH 2007 papers, Association for Computing Machinery, 2007, pp. 81–es.
- [40] J. Shi, G. S. Koonjul, Real-time grasping planning for robotic bin-picking and kitting applications, IEEE Transactions on Automation Science and Engineering 14 (2017) 809–819.
- [41] V. Azizi, A. Kimmel, K. Bekris, M. Kapadia, Geometric reachability analysis for grasp planning in cluttered scenes for varying end-effectors, in: 2017 13th IEEE Conference on Automation Science and Engineering (CASE), IEEE, 2017, pp. 764–769.
- [42] M. R. Dogar, K. Hsiao, M. Ciocarlie, S. Srinivasa, Physics-based grasp planning through clutter, Robotics: Science and Systems VIII, 2012 (2012).
- [43] C. Eppner, R. Deimel, J. Alvarez-Ruiz, M. Maertens, O. Brock, Exploitation of environmental constraints in human and robotic grasping, The International Journal of Robotics Research 34 (2015) 1021–1038.
- [44] G. Salvietti, M. Malvezzi, G. Gioioso, D. Prattichizzo, Modeling compliant grasps exploiting environmental constraints, in: 2015 IEEE International Conference on Robotics and Automation (ICRA), IEEE, 2015, pp. 4941–4946.
- [45] A. Meghdari, M. Salehi, General impact of robotics and automation in radiation environments, HIGH LEVELS OF NATURAL RADIATION (1993) 237.
- [46] K. E. Dodson, Historical review of plutonium storage container failures at Lawrence Livermore National Laboratory, Technical Report, Lawrence Livermore National Lab., CA (United States), 1994.
- [47] M. Gabiccini, A. Bicchi, D. Prattichizzo, M. Malvezzi, On the role of hand synergies in the optimal choice of grasping forces, Autonomous Robots 31 (2011) 235.
- [48] A. Bicchi, On the problem of decomposing grasp and manipulation forces in multiple whole-limb manipulation, Robotics and Autonomous Systems 13 (1994) 127–147.

Alessandro Altobelli received the B.S degree in Information Engineering in 2009 from University of Perugia, the M.S degree in Automation Engineering from University of Pisa in 2011 and the PhD in Automatics, Robotics and Bioengineering from University of Pisa in 2015. He carried out his research activity at the Advanced Robotics Department of Italian Institute of Technology, from 2012 to 2015. From 2016 to 2017 he worked

as software engineer in R&D group at Infinity Technology Solutions. Actually he is working as research engineer at RACE (United Kingdom Atomic Energy Authority) in the Robotics and AI in Nuclear (RAIN) project. He has a strong interest on haptics, robotics and teleoperation.

Ozan Tokatli received his BSc, MSc and PhD degrees in Mechatronics Engineering from Sabanci University in 2008, 2010 and 2015, respectively. He worked as a post doctoral research associate in Haptics Laboratory at University of Reading. He is currently a research engineer in RACE, UKAEA which is a partner of the RAIN Hub. During his PhD, he worked on haptic systems with fractional order controllers and during his post-doctoral research, he investigated the use of haptic interfaces for classroom use to enhance the learning. His current research interest is physical human robot interaction in hazardous environments. His research interests extend to design of haptic interfaces and control of robots for haptics and pHRI.

Robert Skilton is Head of Cybernetics and Lead Technologist at RACE, a UK centre for Remote Applications in Challenging Environments, where he leads a team specialising in control systems, autonomy, and perception for robotic operation and inspection in hazardous environments. Robert graduated with an MSc in Cybernetics in 2011, and is currently studying for a PhD in Autonomous Robotics and Machine Learning at the Surrey Technology for Autonomous systems and Robotics (STAR) Lab. Robert is a Chartered Engineer, brings experience in developing robotic systems for hazardous environments and has developed numerous robotic and software platforms for use in nuclear and other extreme environments. Robert has experience from a wide range of roles on industrial engineering and R&D projects including in telerobotics, and is currently leading various related activities including the Robotics and AI in Nuclear (RAIN) work on teleoperation of industrial robots.