

J.E. Menard, T. Brown, L. El-Guebaly, M. Boyer, J. Canik, B. Colling,
R. Raman, Y. Zhai, P. Buxton, B. Covele, C. D'Angelo, A. Davis, S. Gerhardt,
M. Gryaznevich, M. Harb, T.C. Hender, S. Kaye, D. Kingham,
M. Kotschenreuther, S. Mahajan, R. Maingi, E. Marriott, E.T. Meier,
L. Mynsberge, C. Neumeyer, M. Ono, S.A. Sabbagh, V. Soukhanovskii,
P. Valanju and R. Woolley

Fusion Nuclear Science Facilities and Pilot Plants Based on the Spherical Tokamak

Enquiries about copyright and reproduction should in the first instance be addressed to the Culham Publications Officer, Culham Centre for Fusion Energy (CCFE), K1/083, Culham Science Centre, Abingdon, Oxfordshire, OX14 3DB, UK. The United Kingdom Atomic Energy Authority is the copyright holder.

Fusion Nuclear Science Facilities and Pilot Plants Based on the Spherical Tokamak

J.E. Menard¹, T. Brown¹, L. El-Guebaly², M. Boyer¹, J. Canik³,
B. Colling⁴, R. Raman⁵, Y. Zhai¹, P. Buxton⁶, B. Covele⁷,
C. D'Angelo², A. Davis², S. Gerhardt¹, M. Gryaznevich⁶, M. Harb²,
T.C. Hender⁴, S. Kaye¹, D. Kingham⁶, M. Kotschenreuther⁷,
S. Mahajan⁷, R. Maingi¹, E. Marriott², E.T. Meier^{8;10},
L. Mynsberge², C. Neumeyer¹, M. Ono¹, S.A. Sabbagh⁹,
V. Soukhanovskii¹⁰, P. Valanju⁷, R. Woolley¹

¹*Princeton Plasma Physics Laboratory, Princeton, NJ, USA*

²*University of Wisconsin, Madison, WI, USA*

³*Oak Ridge National Laboratory, Oak Ridge, TN, USA*

⁴*CCFE, Culham Science Centre, Abingdon, Oxfordshire, UK*

⁵*University of Washington, Seattle, WA, USA*

⁶*Tokamak Energy Ltd, Milton Park, Oxfordshire, UK*

⁷*University of Texas at Austin, Austin, TX, USA*

⁸*College of William and Mary, Williamsburg, VA, USA*

⁹*Columbia University, New York, NY, USA*

¹⁰*Lawrence Livermore National Laboratory, Livermore, CA, USA*

Fusion Nuclear Science Facilities and Pilot Plants Based on the Spherical Tokamak

J.E. Menard¹, T. Brown¹, L. El-Guebaly², M. Boyer¹, J. Canik³,
B. Colling⁴, R. Raman⁵, Y. Zhai¹, P. Buxton⁶, B. Covele⁷,
C. D'Angelo², A. Davis², S. Gerhardt¹, M. Gryaznevich⁶, M. Harb²,
T.C. Hender⁴, S. Kaye¹, D. Kingham⁶, M. Kotschenreuther⁷,
S. Mahajan⁷, R. Maingi¹, E. Marriott², E.T. Meier^{8,10},
L. Mynsberge², C. Neumeyer¹, M. Ono¹, S.A. Sabbagh⁹,
V. Soukhanovskii¹⁰, P. Valanju⁷, R. Woolley¹

¹Princeton Plasma Physics Laboratory, Princeton, NJ, USA

²University of Wisconsin, Madison, WI, USA

³Oak Ridge National Laboratory, Oak Ridge, TN, USA

⁴CCFE, Culham Science Centre, Abingdon, Oxfordshire, UK

⁵University of Washington, Seattle, WA, USA

⁶Tokamak Energy Ltd, Milton Park, Oxfordshire, UK

⁷University of Texas at Austin, Austin, TX, USA

⁸College of William and Mary, Williamsburg, VA, USA

⁹Columbia University, New York, NY, USA

¹⁰Lawrence Livermore National Laboratory, Livermore, CA, USA

Abstract. A Fusion Nuclear Science Facility (FNSF) could play an important role in the development of fusion energy by providing the nuclear environment needed to develop fusion materials and components. The spherical torus/tokamak (ST) is a leading candidate for an FNSF due to its potentially high neutron wall loading and modular configuration. A key consideration for the choice of FNSF configuration is the range of achievable missions as a function of device size. Possible missions include: providing high neutron wall loading and fluence, demonstrating tritium self-sufficiency, and demonstrating electrical self-sufficiency. All of these missions must also be compatible with a viable divertor, first-wall, and blanket solution. ST-FNSF configurations have been developed simultaneously incorporating for the first time: (1) a blanket system capable of tritium breeding ratio $TBR \approx 1$, (2) a poloidal field coil set supporting high elongation and triangularity for a range of internal inductance and normalized beta values consistent with NSTX/NSTX-U previous/planned operation, (3) a long-legged divertor analogous to the MAST-U divertor which substantially reduces projected peak divertor heat-flux and has all outboard poloidal field coils outside the vacuum chamber and superconducting to reduce power consumption, and (4) a vertical maintenance scheme in which blanket structures and the centerstack can be removed independently. Progress in these ST-FNSF mission vs. configuration studies including dependence on plasma major radius R_0 for a range 1m to 2.2m are described. In particular, it is found the threshold major radius for $TBR = 1$ is $R_0 \geq 1.7m$, and a smaller $R_0=1m$ ST device has $TBR \approx 0.9$ which is below unity but substantially reduces T consumption relative to not breeding. Calculations of neutral beam heating and current drive for non-inductive ramp-up and sustainment are described. An $A=2$, $R_0 = 3m$ device incorporating high-temperature superconductor toroidal field coil magnets capable of high neutron fluence and both tritium and electrical self-sufficiency is also presented following systematic aspect ratio studies.

1. Introduction

There are several possible pathways from successful demonstration of a burning plasma in ITER to a commercial power plant. These different pathways are influenced by the number of missions to be carried forward in the device(s) [1] following ITER. Such missions include: providing high neutron wall loading and fluence, demonstrating tritium self-sufficiency, and demonstrating electrical self-sufficiency. Which missions are chosen has a strong influence on device configuration and size. One option is a fusion demonstration power plant (DEMO) [2] with an engineering/electricity gain $Q_{eng} \sim 3-5$ and other parameters approaching those of a first-of-a-kind power plant. Another option is a “Pilot Plant” which is a potentially attractive next-step towards fusion commercialization by demonstrating generation of a small amount of net electricity $Q_{eng} \geq 1$ as quickly as possible and in as small a facility as possible in a configuration directly scalable to a power plant [3]. However, to advance directly from ITER to a DEMO or Pilot Plant there are significant challenges to achieving net electricity and tritium fuel production - in particular the blanket technology used for thermal power conversion and tritium breeding. Such challenges have motivated consideration of a Fusion Nuclear Science Facility (FNSF) / Component Test Facility (CTF) [4, 5, 6, 7, 8, 9, 10] to provide a facility to aid in the development of fusion energy by providing the nuclear environment needed to develop fusion materials and components but without the risk, size, and cost associated with the goal of $Q_{eng} \geq 1$. The goal of such a device would be to provide fusion-relevant neutron wall loading $W_n \geq 1\text{MW}/\text{m}^2$, neutron fluence $\geq 6\text{MW}\cdot\text{yr}/\text{m}^2$, component testing area of $5\text{-}10\text{m}^2$, and continuous on-time (i.e. steady-state operation) for durations in the range of 10^6s [11].

The spherical torus/tokamak (ST) is a leading candidate for the FNSF / CTF application due to its potentially high neutron wall loading and modular configuration. However, several key questions have not previously been addressed for an ST-based FNSF, including:

1. How large must an ST device be to achieve tritium breeding ratio $\text{TBR} \geq 1$?
2. What is the impact of the divertor configuration and blanket penetrations on TBR?
3. How much externally supplied tritium would be needed if $\text{TBR} \leq 1$?
4. What are the device and component lifetimes?
5. How do high-temperature superconductors (HTS) influence FNSF options?

The methodology used to address these questions is iterative and begins with zero-dimensional systems studies to estimate fusion performance levels as a function of device size and physics assumptions for stability, confinement, and heating and current drive efficiency. This is followed by free-boundary equilibrium calculations to identify

poloidal field (PF) coil locations and currents, then detailed CAD-based device layouts, and then detailed 3D neutronics calculations of neutron wall loading, shielding, and tritium breeding. The results of the neutronics calculations then influence the design assumptions and device layout for the next iteration.

Based on such techniques, recent studies have for the first time identified ST-FNSF configurations simultaneously incorporating: (1) tritium self-sufficiency, i.e. a blanket system capable of tritium breeding ratio $TBR \approx 1$, (2) a poloidal field (PF) coil set supporting high elongation κ and triangularity δ for a range of internal inductance l_i and normalized beta β_N values consistent with NSTX/NSTX-U previous/planned operation, (3) a long-legged / Super-X divertor analogous to the MAST-U divertor [12] which substantially reduces projected peak divertor heat-flux and has all outboard equilibrium PF coils outside the vacuum chamber and as superconducting to reduce power consumption, and (4) a vertical maintenance scheme in which blanket structures and the centerstack (CS) can be removed independently. TRANSP/NUBEAM [13, 14, 15] calculations of neutral beam heating and current drive in support of full non-inductive operation (see Section 2.1.5) are also incorporated including the layout of the neutral beams and associated penetrations in the blankets. A key finding for copper-TF-based ST-FNSF devices is that the threshold major radius for $TBR \approx 1$ is $R_0 = 1.7\text{m}$, and a smaller $R_0 = 1\text{m}$ ST device has $TBR \approx 0.9$ which is below unity but substantially reduces T consumption relative to not breeding. Further, leveraging the finding of high TBR at low-A using only/mostly outboard breeding, very high current density HTS toroidal field coils are found to offer the possibility of low-A ($A=1.8-2.2$) FNSF devices that achieve the Pilot Plant mission of electrical self-sufficiency and have reduced TF magnet mass albeit with the inclusion of inboard shielding and larger major radius.

The organization of the remainder of this paper is as follows: Section 2 describes the overall physics design assumptions for ST-FNSF using Cu TF magnets, Section 3 describes ST-FNSF device layout and maintenance issues, Section 4 describes neutronics modelling including shielding and tritium breeding ratio calculations, Section 5 discusses low-A Pilot Plant concepts using HTS toroidal field coils to reduce magnet resistive power losses, and Section 6 summarizes the results including answers to the above key questions posed for ST-based FNSFs and Pilot Plants.

2. Physics Design

The physics design of the ST-based FNSF described here is carried out in multiple steps. First, approximate zero-dimension/global models of ST-FNSF performance are utilized to define operating scenarios and equilibrium requirements. Second, the results from the zero-dimensional (0D) models are used to constrain free-boundary equilibrium

calculations, then such calculations are used to identify poloidal field (PF) coil locations, currents, and current densities along with plasma facing component (PFC) and limiter locations consistent with approximate models for shielding, blankets, ports, and other device components. Lastly, the PF coil locations and other parameters are used in free-boundary TRANSP/NUBEAM calculations of plasma kinetic profiles consistent with full-non-inductive operation utilizing bootstrap (BS) current and neutral beam injection (NBI) current drive (CD). The NBI-CD efficiency and profile dependence on NBI tangency radius is then used to guide NBI port layout which in turn impacts the overall device layout and tritium breeding capabilities as described in Section 4.2. The physics design results from the 0D models, free boundary equilibrium calculations, and TRANSP/NUBEAM simulations are described in the subsections that follow.

2.1. Zero-dimensional systems studies

In this subsection, zero-dimensional / global scalings are used to guide the first iteration of the physics design of an ST-based FNSF. These scaling calculations have been benchmarked against TRANSP simulations as described in Section 2.4. The choice of aspect ratio and toroidal field is explained, the impact of vertical and kink instabilities are discussed, and the energy confinement assumptions, heating and current drive tools, and choice of operating density are described.

2.1.1. Choice of Aspect Ratio and Toroidal Field

The deuterium-tritium (D-T) fusion power P_f in a magnetic confinement system scales as $P_f \propto n^2 \langle \sigma v \rangle_{DT}$ [16] which for ion temperatures in the range of 8-30keV is approximately proportional to $p^2 = (nT)^2 \propto \beta_T^2 B_{T0}^4$ where $\beta_T \equiv 2\mu_0 \langle p \rangle / B_{T0}^2$, $\langle p \rangle$ is the volume-averaged plasma pressure, and B_{T0} is the vacuum toroidal field at the plasma geometric center. For steady-state tokamaks/STs it is anticipated that a majority of the plasma current must be provided by the bootstrap current, and it can be shown that [17] $\beta_T \sim A^{-1/2} (1 + \kappa^2) \beta_N^2 / f_{BS}$ where the plasma aspect ratio $A \equiv \epsilon^{-1} \equiv R_0/a$, R_0 is the radius of the plasma geometric center, a is the plasma minor radius, κ is the plasma boundary elongation, f_{BS} is the bootstrap current fraction, and the normalized beta $\beta_N \equiv \beta_T a B_T / I_P [\%mT/MA]$ where I_P is the plasma current. From this scaling, and since typically $\kappa^2 \gg 1$, it is evident that P_f scales approximately as $P_f \propto \epsilon (\kappa \beta_N B_T)^4$. This scaling implies achieving high κ , β_N , and B_T are arguably of equal importance for achieving high fusion power density at fixed bootstrap fraction. The maximum achievable κ and β_N are known to increase as the aspect ratio is decreased [18, 19, 20, 17], whereas the maximum B_T in the plasma is a decreasing function of aspect ratio through a combination of field/stress and/or current density limits at the central toroidal field magnet, 1/R variation of the toroidal field, and the required thickness of inboard

shielding. For proposed ST-FNSF devices with normally conducting (copper) toroidal field coils and relatively thin inboard/high-field-side shielding ($\leq 20\text{cm}$) between the plasma facing components and the TF magnet, optimizations based on minimizing the center-post mass or electrical power consumption or cost of electricity [5, 19, 21] find the range of optimal aspect ratio $A = 1.5 - 2$. For the studies in this paper, a narrower range of aspect ratios in the center of this range is chosen, namely $A = 1.7 - 1.8$, and the toroidal field is chosen to be $B_T = 3\text{T}$ similar to configurations studied most recently by Peng and co-workers [22] using a water-cooled center-post capable of providing $B_T \geq 3\text{T}$ including nuclear heating from neutron wall loads $\leq 2\text{MW/m}^2$ [23, 24]. The choice of a constant $B_T = 3\text{T}$ is a convenient value that ensures q^* is near/above 3 for the range of configurations studied (see Section 2.1.3 for more detail) while also minimizing TF resistive power dissipation.

2.1.2. Vertical Stability Limits

The maximum stable κ is primarily a function of the plasma internal inductance l_i and aspect ratio, and lower aspect ratio has a higher natural elongation [25, 18]. For steady-state tokamaks with a majority of the plasma current provided by the bootstrap current, the l_i is more strongly influenced by the plasma pressure profile and broad pressure profiles generate bootstrap current at larger minor radius which reduces l_i . Figure 1 shows the x-point elongation achieved in NSTX as a function of l_i for several groupings of aspect ratio. The dashed line is a linear fit to κ values slightly above the upper-bound of the NSTX data and is given by $\kappa_{x-ST} = 3.4 - l_i$. This formula is used to constrain the ST-FNSF equilibrium κ for a range l_i values = $0.4 - 0.8$. It is anticipated that improved vertical position identification and control [26] will enable increases in stable elongation of 5-10% in NSTX-U and ST-FNSF. Using NSTX data and TRANSP modeling of NSTX-U as a guide [27, 28], the most probable thermal pressure peaking factor $p(0)/\langle p \rangle = 1.7 - 2$ in H-mode plasmas corresponding to $l_i = 0.5 - 0.65$ and $\kappa \leq 2.9 - 2.75$ using the formula above. Assuming the corresponding total pressure peaking factor does not exceed 2.5, this range of thermal $p(0)/\langle p \rangle$ and l_i minimized disruptivity in NSTX as shown in Figure 2 and is used to guide the chosen poloidal field coil set for the ST-FNSF configurations studied here.

2.1.3. Kink Stability Limits

Current-driven and pressure-driven kink modes set strong limits on the accessible fusion performance in tokamaks. The safety factor parameter $q^* = \epsilon(1 + \kappa^2)\pi a B_{T0}/\mu_0 I_P$ is a useful metric for current-driven kink stability [17], and analysis of NSTX disruption rates [29] shows a significant increase in disruptivity when $q^* < 2.8$ as shown in Figure 3a. This implies any ST-FNSF operating point should maintain $q^* \geq 2.8$.

Importantly, Figure 3a also shows that for $q^* > 3$ in NSTX, disruptivity does not necessarily increase at high β_N , but instead moderately decreases as β_N is increased from 3 – 4 to 4 – 6. Figure 3b shows that NSTX plasmas with $A \leq 1.7$ required high shaping factor $S \equiv q_{95}I_P/aB_T \geq 20$ to reduce disruptivity, and $S \geq 30$ combined with $\beta_N \geq 4.5$ is most favorable for low disruptivity. Such β_N values are near or moderately above the typical $n = 1$ no-wall stability limits for NSTX plasmas [18, 30, 31, 17, 32, 33] and for projected limits for NSTX-U plasmas [28, 34]. RWM stabilization in ST-FNSF (if necessary) is assumed to be provided by either passive/kinetic stabilization [35, 36, 37, 38, 32, 39, 40, 41, 42, 43, 44, 45] and/or active RWM feedback control [46, 47, 48, 49]. Combined/dual-purpose low- n error-field correction and RWM feedback control coils in ST-FNSF would likely be located behind outboard blanket modules and/or the main vacuum vessel, and active RWM-control is envisioned to utilize advanced state-space control techniques [50, 51, 49].

2.1.4. Energy Confinement

A key parameter for fusion performance is the plasma thermal energy confinement time τ_{E-th} which relates the thermal stored energy W_{th} to the plasma heating power P_{heat} via $W_{th} = P_{heat}\tau_{E-th}$ [52]. Confinement scalings are a common means of estimating energy confinement, and a widely used scaling is the ITER ELMy H-mode scaling termed ITER IPB98(y,2) [52, 53]. Further, it is common to normalize experimental or expected confinement with respect to the scaling, and this ratio is the confinement multiplier H_{98} . A key scientific goal of the NSTX Upgrade research facility and program [27] is to determine if ST confinement scales similarly to conventional aspect ratio or more closely follows confinement scaling on present ST devices [54, 55, 56, 57] as the plasma temperature is increased. In terms of dimensionless “physics” scaling [58, 59], a key question is the dependence of the dimensionless confinement on β and collisionality ν , i.e. the determination of the exponents in relations of the form $\Omega\tau_E \propto \beta^{-\alpha_\beta}\nu^{-\alpha_\nu}$ since present ST data exhibits a weak dependence on β ($\alpha_\beta \approx 0$) as does some conventional aspect ratio data [58, 59] but exhibits a stronger nearly inverse dependence on collisionality ($\alpha_\nu = 0.7 - 1$). This potentially favorable collisionality dependence of confinement leads to projected confinement times 1.5-2 \times higher than the ITER scaling [27, 28] for NSTX-U, MAST-U, and ST-FNSF. Such confinement enhancements could significantly reduce the device size and/or required heating power to achieve high fusion performance in an FNSF.

On NSTX, H_{98} values of up to 1.2 were accessible for a range of normalized density values spanning Greenwald fraction [60, 61] values of $f_{Greenwald} = 0.5 - 1$ as shown in Figure 4. Another promising confinement regime is the “Enhanced Pedestal H-mode” (EPH) [62, 63, 64] which has accessed $H_{98} = 1.3 - 1.5$ for a range of plasma conditions

and H_{98} approaching 2 for several shots. At the present time, the physics of EPH access is not well understood and achieving more reliable access and sustainment will be an important element of the NSTX-U research program. Given the present uncertainty in achieving very high H_{98} , ST-FNSF configurations studied here aim to achieve FNS baseline mission objectives while only requiring confinement at the level of $H_{98} \leq 1.3$.

2.1.5. Heating and Current Drive

A very important consideration for ST-FNSF is the choice of heating and current drive source. For the typically over-dense plasma conditions of the ST, commonly used RF schemes such as Electron Cyclotron Current Drive (ECCD) and Lower Hybrid Current Drive (LHCD) suffer from accessibility problems. The high-harmonic fast wave (HHFW) [65, 66] does not suffer from such accessibility problems and has heated plasmas to record ST electron temperatures $T_e(0) \geq 6\text{keV}$ in NSTX [67]. However, due in part to larger trapped particle fraction at low aspect ratio, the current drive efficiency for bulk current drive is relatively low [68, 69, 27]. Further, edge losses in the scrape-off-layer to the divertor [70, 71, 72, 73] can degrade HHFW core coupling efficiency, and parasitic absorption by NBI fast-ions [74, 75, 76] can compete with thermal electron heating and current drive. For these reasons, HHFW appears most applicable to heating and driving current in low-current high-bootstrap-fraction plasmas [77] serving as targets for subsequent non-inductive current ramp-up through other means. Electron Bernstein Waves (EBW) are another potentially very attractive wave for heating and driving current in over-dense plasma conditions [78, 79, 80], but the necessity for precise tailoring of the edge density gradient [81] to maximize the double-mode-conversion efficiency combined with other loss mechanisms in the plasma edge [82, 83] have thus far made efficiently coupling to the EBW operationally challenging.

Neutral beam injection (NBI) is one of the few viable options for ST heating and current drive, and nearly all of the present high-performance ST physics basis has been developed using NBI heating. Further, momentum injection will be very important for providing rotation shear to suppress ion turbulence [84, 85, 86] to achieve high ion temperatures for fusion applications, and tangentially injected NBI can provide such rotation and rotation shear. The NBI energy and injection tangency radius are critical parameters for optimizing current drive efficiency and the driven current profile. The neutral beam energy must be sufficiently high to penetrate into the plasma core but be nearly fully ionized by the plasma too avoid excessive shine-through and excessive heating of plasma facing components where NBI intercepts the first wall. For NBI energies between 0.1-1MeV, the exponential decay length for beam ionization can be approximated as $\lambda_{ionize}[m] \approx 5.5E[MeV/amu]/n_e[10^{20}m^{-3}]$ [87], and this relation provides a useful guide for estimating the maximum beam energy applicable to a given

ST size. In particular, this relation indicates deuterium beams in the range of 0.1-1MeV are well matched to ST device sizes in the range of $R_0=1-2\text{m}$ and electron densities of a few 10^{20}m^{-3} . The tangency radius of injection is also important, and injecting at radii larger than the radius of the geometric center of the plasma (i.e. $R_{tang}/R_0 \geq 1$) can provide substantially higher current drive than more perpendicular injection [27]. The maximum tangency radius is limited by the available space between the outboard toroidal field coils and by the required path-length through the plasma for beam ionization and absorption (i.e. the shine-through limit).

The neutralization efficiency for H^+ or D^+ ions for positive NBI (PNBI) drops rapidly above 60-75 keV/amu, and thus the maximum practical injection energy for D^0 using PNBI is 120-150keV [87, 88]. Long-pulse PNBI using the TFTR/NSTX/NSTX-U style sources [27] as proposed for the Tokamak Physics eXperiment (TPX) [89] could be utilized for initial operation of ST-FNSF but would require the development of steady-state neutralization methods. For higher energy injection, Negative NBI (NNBI) [90, 91] gas neutralization efficiency remains relatively high at 60% approximately independent of energy [88]. Substantial technical development of NNBI at 0.5MeV has been successfully carried out in preparation for JT-60 Super Advanced (JT-60SA) [92, 93, 94] operation and for 1MeV NNBI for ITER [88, 95, 96]. For the purposes of this paper, it is assumed that NNBI suitable for ST-FNSF will be developed through a combination on ongoing research and development for JT-60SA and ITER and that steady-state operation and higher electrical efficiency could eventually be achieved through improved plasma and/or photo-neutralization [88, 97].

For the 0D scaling calculations performed here, the NBI current drive efficiency is estimated using Equations 44 and 45 of Reference [98] which include the effects of fast-ion slowing down and simplified tokamak geometry effects and are applicable to arbitrary injection energy and thermal species temperatures. The leading order scaling of the current drive efficiency is proportional to the well-known $P_{NBI}T_e(1 - Z_{beam}/Z_{eff})/n_eR$ dependence [99, 100], and the computed efficiency from [98] is rescaled by a factor 0.7 to approximately account for field-line pitch and profile effects which reduce the efficiency, and to improve agreement with TRANSP NBI current drive calculations both for the FNSF calculations here and for experimentally inferred values in NSTX [101, 102] when core MHD activity was sufficiently weak. The fast-ion stored energies for NBI/alpha particles are computed analytically by calculating the fast-particle injection/birth rates, thermalization times, and average energies during thermalization. The fast-ion and thermal stored energies are then used to compute the total stored energy, β_N , and β_T values. Fusion powers and neutron rates are computed from scalings for thermonuclear and beam-target [103] reactions (beam-beam reactions are ignored) cross-checked with TRANSP calculations.

Lastly, the bootstrap current fraction [104, 105, 106] $f_{BS} = I_{BS}/I_P$ is assumed to scale as $C_{BS}\sqrt{\epsilon}\beta_{pol-th}$. Here β_{pol-th} is the poloidal beta as defined in [18] using the thermal pressure. The bootstrap fraction coefficient is assumed to vary as $C_{BS} = MAX(1.2 - 0.2 \times q^*/q_{min}, 0.6)$ similar in form to the ITER scaling described in [106] but consistent with low-aspect-ratio equilibrium calculations [18, 17, 27]. The total non-inductive current for a given scenario is then calculated from the sum of the bootstrap and NBI currents. All these calculations are included in a zero-dimensional systems-code written for this paper to compute non-inductive current drive from the NBI and bootstrap currents for fully non-inductive plasmas while also computing a wide range of other fusion performance parameters.

2.1.6. Fusion Performance Dependence on Density and Size

A fundamental requirement for an FNSF is achievement of neutron wall loading of at least $1\text{MW}/\text{m}^2$ while providing sufficient component testing area $\geq 10\text{m}^2$ [11]. Based on previous design studies and calculations performed here, the lower-bound on device size capable of meeting these neutron flux and testing area goals is $R_0 \approx 1\text{m}$. The ST pilot plant [3] provides an upper-bound on major radius with $R_0 = 2.2\text{m}$ for a device that can achieve both the FNSF mission and small net electricity production. This range of major radii $R_0 = 1\text{--}2.2\text{m}$ is studied in the remainder of this paper. For the purposes of configuration comparison, the plasma-surface-average neutron flux $\langle \Gamma_n \rangle$ is typically held fixed at $1\text{MW}/\text{m}^2$ as a constraint. This flux is approximately equal to the average neutron wall loading $\langle W_n \rangle$ provided the plasma-wall gap is small relative to the plasma minor radius, and unless otherwise stated, these parameters are used interchangeably, i.e. $\langle \Gamma_n \rangle \approx \langle W_n \rangle$.

Using the physics assumptions described in previous sections, a device major radius half way between the minimum ($R_0=1\text{m}$) and maximum ($R_0=2.2\text{m}$) values of this study is chosen (i.e. $R_0 = 1.6\text{m}$) to investigate the impact of varied plasma density. Assuming fixed aspect ratio $A=1.7$, elongation $\kappa=2.75$, $B_T=3\text{T}$, NNBI injection energy $E = 0.5\text{MeV}$ for heating and current drive, and ITER H-mode confinement multiplier $H_{98} = 1.25$, it is found that 80MW of NNBI heating power is required to achieve $\langle W_n \rangle \geq 1\text{MW}/\text{m}^2$ for the range of normalized densities $f_{Greenwald} = 0.5\text{--}1$ considered. Figure 5a shows that for this normalized density range $\beta_N = 4\text{--}4.7$, $q^* \geq 3$, $Q_{DT} = 1.8\text{--}2.7$, and $\langle W_n \rangle = 1\text{--}1.5\text{MW}/\text{m}^2$. Figure 5b shows the plasma current $I_P = 10.8\text{--}12\text{MA}$, $\beta_T = 16\text{--}19\%$, and the fusion power P_{fusion} varies from $146\text{--}220\text{MW}$ with the highest plasma densities resulting in the highest fusion power and gain and neutron wall loading.

Stronger dependences on plasma density are observed for other operating parameters as shown in Figure 6. Figure 6a shows that the bootstrap current fraction f_{BS} increases from $60\text{--}84\%$ which implies the beam-driven current drive fraction

decreases by a factor of 2.5 from 40 – 16% as $f_{Greenwald}$ is increased from 0.5 to 1. Similarly, due in part to reduced fast-ion slowing down time resulting from lower average electron temperature at higher density, Figure 6b shows the fast-ion beta fraction $\beta_{fast}/\beta_{total}$ decreases by a factor of 3 from 18 to 6%. As shown in the same figure, the D-T fusion alpha-particle contribution is 20 – 30% of the total fast-ion pressure and the remainder comes from NBI fast-ions. Defining an Alfvén speed based on the vacuum field B_T at the plasma-geometric-center and the line-average main-ion density, both species of fast ions are computed to be super-Alfvénic with $V_\alpha/V_{Alfvén} = 4 - 6$ and $V_{NBI}/V_{Alfvén} = 2 - 3$. As demonstrated in NSTX, instabilities driven by super-Alfvénic fast-ions of sufficiently high β fraction can lead to fast ion redistribution and/or loss and can significantly impact the NBI-driven current [102]. This physics will be explored at a more FNSF-relevant higher toroidal field and instability toroidal mode-number in NSTX-U in which stronger mode damping will compete with stronger instability drive relative to NSTX plasmas [107].

Recent parametric studies of NSTX plasmas indicate that fast-ion instabilities can be largely avoided even at high $V_{fast}/V_{Alfvén} \leq 6$ if the fast-ion β fraction is below approximately 10% [108]. Further, maintaining sufficiently low fast-ion fraction may also play an important role in retaining elevated no-wall and ideal-wall mode stability limits close to lower-rotation and thermal-plasma values [33]. However, it is also advantageous from a plasma control standpoint to maximize the non-inductive current drive fraction from neutral beams to have more control over the q profile and associated confinement and stability properties of the plasma. For these reasons, a normalized density $f_{Greenwald} \approx 0.8$ appears favorable for simultaneously accessing $\beta_{fast}/\beta_{total} \leq 10\%$ and providing a NBI-CD fraction of $\geq 20\%$ while also staying below the nominal density limit of $f_{Greenwald} \approx 1$.

Figure 7 shows several performance parameters as a function of device major radius R_0 varied from 1m to 2.2m at fixed $f_{Greenwald} = 0.8$ and surface-average neutron wall loading slightly above $1\text{MW}/\text{m}^2$. The beam energy, aspect ratio, field, and confinement are fixed at $E_{NBI} = 0.5\text{MeV}$, $A=1.7$, $B_T = 3\text{T}$, and $H_{98} = 1.25$, respectively. As shown in Figure 7a, the increase in major radius tends to be moderately stabilizing as $\beta_N = 4.9 \rightarrow 4$ and $q^* = 3 \rightarrow 3.5$ while the fusion gain increases from $Q_{DT} = 1 \rightarrow 3.2$. As shown in Figure 7b, the toroidal beta decreases moderately from $\beta_T = 18\% \rightarrow 15\%$. The plasma parameters that vary most strongly with major radius are the plasma current and fusion power. As shown in Figure 7b, I_P increases by approximately a factor of 2 from $7\text{MA} \rightarrow 14\text{MA}$, and as shown in Figure 7c, the fusion power increases $60\text{MW} \rightarrow 300\text{MW}$ as the heating power increases from $60\text{MW} \rightarrow 95\text{MW}$. Figure 8a shows that the bootstrap fraction f_{BS} decreases from $81\% \rightarrow 72\%$, and Figure 8b shows that β_{fast}/β_{tot} increases only 16% from $8.8\% \rightarrow 10.2\%$ as β_α/β_{tot} increases from 1% to 3%. Both

V_α/V_{Alfven} and V_{NBI}/V_{Alfven} decrease by 40% as the major radius is increased which may imply reduced drive for fast-ion instabilities at larger machine size. It should also be noted that NNBI at $E=0.5\text{MeV}$ may be too energetic to be fully absorbed at large tangency radius in smaller FNSF devices, and if lower energy beams are used, more power may be required (due to reduced current drive efficiency) to achieve the assumed NBI current drive. From these size scans it is concluded that the overall impact of increased major radius on normalized plasma parameters is relatively modest, but the impact on fusion power and tritium consumption is large since both parameters increase by a factor of 5 as the major radius is increased from $R_0 = 1\text{m}$ to 2.2m .

In the limit where tritium self-sufficiency is not required, clearly small STs are favored since they minimize fusion power and tritium consumption. However, tritium self-sufficiency and electrical self-sufficiency are ultimately required for the development of fusion energy, so it is important to determine the thresholds in device size for achieving these goals. Initial assessments of tritium self-sufficiency are described in Section 4.2. For electrical self-sufficiency, the engineering efficiency Q_{eng} (utilizing the same parametric assumptions as in previous pilot plant studies [3]) is defined as the ratio of electrical power produced P_{elec} to electrical power consumed and can be expressed as:

$$Q_{eng} = \frac{\eta_{th}\eta_{aux}Q(4M_n + 1 + 5/Q + 5P_{pump}/P_{fus})}{5(1 + \eta_{aux}Q(P_{pump} + P_{sub} + P_{coils} + P_{control})/P_{fus})} \quad (1)$$

where η_{th} = thermal conversion efficiency = P_{elec}/P_{th} , η_{aux} = auxiliary power wall plug efficiency, P_{fus} = total D-T fusion power, P_{aux} = auxiliary power for heating and current-drive, $Q = P_{fus}/P_{aux}$, M_n = neutron energy multiplication factor, P_n and P_α = neutron and alpha powers from fusion, P_{th} = thermal power = $M_n P_n + P_\alpha + P_{aux}$, P_{pump} = coolant pumping power, P_{sub} = subsystems power, P_{coils} = power dissipated in normally conducting coils, and $P_{control}$ = power used in plasma or plant control not included in P_{aux} . Equation 1 illustrates that the leading terms in the engineering efficiency Q_{eng} involve a combination of technology and physics performance metrics. In particular, Q_{eng} depends to leading order on the thermal conversion and auxiliary system wall-plug efficiencies (η_{th} and η_{aux}) and the D-T fusion gain Q . To achieve electrical self-sufficiency in the modest-sized ST devices considered here requires high blanket thermal conversion efficiency and increased confinement and stability. For this analysis, the value of η_{th} is varied to assess the impact on Q_{eng} , a constant $\eta_{aux} = 0.4$ (higher than presently achievable [3]) and $M_n = 1.1$ are assumed. $E_{NBI} = 0.5\text{MeV}$ NNBI is assumed for heating and current drive resulting in a normalized current drive (CD) efficiency $\eta_{CD} \equiv I_{CD}R_0n_e/P_{CD}T_e \approx 0.04 \times 10^{20}\text{A/Wm}^2\text{keV}$.

Figure 9 shows the engineering efficiency and fusion gain $Q = Q_{DT}$ for a range of blanket thermal conversion efficiencies and device sizes for high-performance ST-FNSF scenarios targeting net electricity production. These scenarios have fixed $A=1.7$, $B_T =$

3T, $H_{98}=1.5$, $\beta_N = 5.5$, $\kappa=3.0$, and $f_{Greenwald} = 0.8$ resulting in $\beta_T = 25-28\%$ and $q^* \approx 3$. Such scenarios have normalized confinement and stability performance near or at the highest values achieved on NSTX. Importantly, Figure 9 shows that as R_0 is increased from 1m to 2.2m the smallest possible ST device that can achieve electricity break-even ($Q_{eng} \approx 1$) has $R_0 = 1.75\text{m}$ assuming very high blanket thermal conversion efficiency $\eta_{th} = 0.59$ as used in the ARIES-AT power plant design [109]. For $\eta_{th} = 0.45$, the required device size to achieve $Q_{eng} = 1$ increases to $R_0=2\text{m}$, and still larger devices are required for lower η_{th} . The fusion power is 2-3 times higher and NBI auxiliary heating power 2-3 times lower for these higher performance scenarios as compared to the cases shown in Figure 7 where $H_{98} = 1.25$ is assumed. As shown in Figure 9, this results in Q_{DT} increasing from 4 \rightarrow 44 as $R_0 = 1\text{m} \rightarrow 2.2\text{m}$. From these studies it can be concluded that a normally-conducting toroidal field coil ST-FNSF device with $R_0 \geq 1.75\text{m}$ could hypothetically achieve $Q_{eng} \geq 1$ but would require both advanced physics and engineering performance.

2.2. Free-boundary Equilibrium Calculations

Achieving high elongation κ and triangularity δ can be challenging in the ST configuration since at least one set of divertor poloidal field (PF) coils is required to be both inboard and close to the divertor x-point. This is challenging in a nuclear environment since neutron damage to the PF coil insulation can substantially reduce the lifetime of the insulator and hence the coil. Figure 10 shows a potential solution in which two PF coils (labeled 1 and 2) are installed at the ends of the TF central rod in a Bitter plate configuration using MgO insulation (see Section 3.1 for design details). For these coils, the CS shield and TF Cu conductor help shield the PF coils. Free-boundary equilibrium calculations show that such PF coils at the ends of the TF can provide high triangularity = 0.5-0.6, and that this is sufficient to provide shaping factor $S = 25-30$ for $q^*=3-4$ for FNSF scenarios. With the inboard PF1 and 2 coils incorporated, additional PF coils at the top and bottom of the device can be added to optimize the divertor configuration for power and particle exhaust.

2.2.1. Divertor Configurations

A range of divertor configurations have been studied for ST-FNSF [110] as shown in Figure 10 ranging from (a) conventional, to (b) snowflake/X [111, 112] and (b) long-leg/super-X [113, 114, 115, 12]. For each of the cases shown, the angle of incidence of the total B-field at the strikepoint is constrained to be $\theta_B = 1-1.5^\circ$ [116]. In Figure 10 the PF coils are colored yellow, the TF conductor orange, shielding/vessel blue, blanket red, and limiter outline green. For the conventional divertor, the strike-point is placed close to a diagonal exhaust slot for pumping and the divertor exhaust control coils PF3, 4,

5 are placed outside the TF coil in an effort to reduce the TF power consumption by reducing the overall height of the Cu TF conductors in the centerstack. Alternatively, if the TF coils were placed outside the PF3-5 coils, additional in-vessel space could be utilized for a vertical target divertor [117, 118]. To achieve a snowflake divertor with the secondary x-point nearly or fully overlapping with the primary x-point while simultaneously providing high triangularity, PF coils 3-4 must be brought closer to PF coils 1-2 as shown in Figure 10b. The poloidal flux expansion for this configuration is large (40-60) and facilitates detachment and significant heat flux reduction (up to a factor 7) as demonstrated in NSTX [119] and as planned to be tested at high power density in NSTX-U [27]. Concepts for poloidal field coils 3 and 4 using Cu conductor, MgO insulation, and WC shielding would marginally be able to provide the necessary coil current, but for such coils there would be no option to make them superconducting (to reduce overall power consumption) due to the excessive nuclear heating and radiation damage (see Section 4.1).

Since parallel heat transport dominates cross-field transport in the scrape-off-layer (SOL), significant reduction of the peak perpendicular divertor heat flux can be achieved by reducing $|B|$ at the strikepoint at fixed angle of B-field incidence [114]. Since $|B| \approx |B_\phi|$ in the divertor and $B_\phi \propto 1/R$, increasing the strike-point major radius is a potentially effective means of divertor heat-flux reduction and is a major motivation for long-leg and super-X [114] divertor configurations. As is evident from comparing Figures 10b and c, the major radius of the strikepoint can be increased by a factor of 2-3 in the long-leg/super-X configuration as compared to the “conventional” and “snowflake” configurations. Other important changes shown in Figure 10c include: the PF1 and 2 coils are closer to the midplane, the PF3-5 coils are inside the TF coils to increase proximity to the plasma make the strike-line more horizontal, the primary x-point is radially outboard of PF1, and the secondary x-point is radially outboard of PF2 and the presence of this x-point assists in generating a snowflake-like divertor leg that is significantly closer to horizontal than the strikeline near the primary x-point. The more horizontal exhaust channel aids in increasing the strike-point radius without significantly increasing the overall height of the device. Additional benefits of this increased strike-point radius include reduced neutron flux and fluence at the divertor plasma facing components (PFCs) due to at least partial shielding by the breeding blankets [114]. Further, rather than having a divertor power and particle exhaust region at the top and bottom of the device, this region can be used for breeding which is important for increasing the TBR > 1 for the ST-FNSF configurations studied here (see Section 4.2). The multiple advantages of the long-leg divertor configuration in Figure 10c motivate adoption of this type of divertor for ST-FNSF.

2.2.2. Equilibrium Shape Variation

With the adoption of a long-legged divertor for ST-FNSF, the next important step is to assess device flexibility with respect to current profile and pressure variation while retaining acceptable power exhaust configurations. Since predictive capability for electron thermal and ion/electron particle transport have not yet been achieved, there is insufficient theoretical basis for predicting pressure and current profile shapes in ST-FNSF. However, as shown in Figure 1, a vast majority of the NSTX data at high elongation was achieved with $l_i = 0.4-0.85$, and this range of inductance can be explored as a viable equilibrium range for ST-FNSF.

Figure 11 shows free-boundary equilibrium calculations for a range of inductance and corresponding elongations $\kappa_{x-ST} \leq 3.4 - l_i$. For each of the configurations shown, the divertor strike-point radius was maintained near the nominal radius $R_{strike} = 2.5\text{m} \pm 0.1\text{m}$ and the total B-field angle of incidence maintained at $\theta_B = 1-1.5^\circ$. The positions of the poloidal field coils (in particular the outboard PF coils 6-8) have been optimized to maintain sufficient inboard and outboard gaps to the blankets and divertors as the current profile and plasma shape are varied while also minimizing the coil current density and staying within allowable limits. There is insufficient space for inboard (high-field-side) slotted divertors in this device configuration for particle control, but a large outboard-to-inboard power exhaust ratio of at least 4 : 1 has been observed in balanced double-null divertor (DND) ST configurations [120, 121, 122], and this asymmetry combined with the large poloidal flux expansion near the x-points in the DND should have acceptable inboard peak divertor heat fluxes (see for example projections in Figure 17).

Figure 12 shows an overlay of the plasma boundaries for some of the equilibria used to define the limiter and coil positions. As is evident from the figure, the inboard limiter shape is determined primarily by the need for sufficient inboard gap near the x-points of the lowest internal inductance scenario (red boundary). In contrast, the outboard blanket and limiter shapes are determined by the need for sufficient gaps/space for the boundary shape of the highest internal inductance shape (purple boundary) and also the increased poloidal flux expansion in the entrance of the divertor region as evident in Figure 11c. Figure 12 also shows that aside from the elongation change with internal inductance, there is also inboard gap and aspect ratio variation, and more importantly significant variation in the boundary squareness [123].

Figure 13 shows several plasma boundary shaping parameters for a range of internal inductance l_i and β_N values. It is not expected that $\beta_N = 8$ equilibria can be stably accessed in ST-FNSF, but this high value of β_N is useful for equilibrium scoping and PF coil specification. Figure 13a shows that the aspect ratio A depends primarily on l_i , and A decreases with increasing l_i as the inboard gap shrinks with a more peaked

current profile and lower elongation. Figure 13b shows that all equilibria approximately follow the prescribed scaling of x-point elongation κ_x with l_i shown by the dashed black line. Figure 13c shows that for the higher β_N scenarios the x-point triangularity $\delta_x = 0.5 - 0.65$ and is nearly independent of l_i for $l_i \leq 0.7$, while for low β_N the achievable $\delta_x = 0.45 - 0.5$ is lower and transitions to the lowest values for $l_i \geq 0.6$. Figure 13d shows the boundary outer squareness increases nearly linearly from $\zeta_o = -0.15$ to 0.0 over the l_i range 0.4 - 0.7 and plateaus at $\zeta_o = 0 - 0.05$ for $l_i \geq 0.7$.

2.2.3. Safety Factor, Poloidal Field Coil Currents

As described in Subsection 2.1.3, maintaining sufficiently high safety factor is important for avoiding the onset of current-driven kink modes and increased disruptivity. Increased l_i reduces the maximum κ and q^* as shown in Figure 14a for the reference $R_0 = 1.7\text{m}$ equilibrium with $I_P = 11.6\text{MA}$. As is evident from this figure, maintaining $q^* \geq 3$ requires maintaining $l_i \leq 0.7$ and the lower β_N scenarios have slightly higher q^* due to slightly lower aspect ratio. Figure 14b shows a similar trend of decreasing q_{95} with increasing l_i with a minimum q_{95} value of 4.5 for the highest l_i studied. Just as there are current and current density limits for the plasma current channel, there are also current and current density limits on the poloidal field coils maintaining the tokamak equilibrium. Figure 14c shows that the total divertor PF coil current (PF1 + PF2) is in the range of 8-12MA which is comparable in magnitude to the reference $I_P = 11.6\text{MA}$. The highest divertor coil current is needed for the lowest β_N and highest l_i values. In contrast, Figure 14d shows that the primary outboard vertical field coils (PF7 + PF8) have the highest magnitude (most negative) current for the highest β_N and lowest l_i values.

For the PF coils considered for ST-FNSF, thermal-hydraulic analysis finds the estimated winding-pack current density limits for multi-turn water-cooled copper coils using MgO insulation and stainless steel jacketing is 7-10MA/m², and the corresponding current density limit for Bitter/helical plate coils is 40-50 MA/m² [124]. Approximate winding-pack current density limits for low-temperature-superconductor (LTS) cable-in-conduit conductor (CICC) [125] coils are 14MA/m² for ITER NbTi PF coils [126, 127], 18-25MA/m² for 1000 A/mm² critical current density Nb₃Sn strand [128, 129], and up to 40MA/m² for 2600 A/mm² Nb₃Sn strand [129] all at 4.2 K. Further, high-temperature-superconductor (HTS) cables such as the twisted stacked-tape cable conductor CICC show promise for providing 40MA/m² or higher winding-pack current density [130], and Conductor on Round Core (CORC) cables have achieved up to 70 MA/m² or higher winding-pack current density at fields up to 19T in “CORC-4” samples in [131]. At the present time, a winding-pack current density limit of 40MA/m² is apparently applicable for the full range of magnet technologies from Bitter plate to advanced LTS and HTS

magnets, and this limit is applied to the PF coils considered here.

Figure 15 shows the effective winding-pack current densities of the ST-FNSF PF coils with a 40MA/m² limit indicated by dashed lines. Figure 15a shows that PF1 has low current density (≤ 10 MA/m²) at the lowest l_i values studied, but reaches 30-40 MA/m² at the highest l_i values. In contrast, Figure 15b shows that PF2 requires approximately 30-50 MA/m² for all cases treated, but lower current is required when PF1 is at its highest current. Thus, since the nuclear heating and damage to these divertor coils is too high for superconducting coils (see Section 4.1), both PF1 and PF2 must use an advanced Bitter/helical plate approach. Figure 15c shows that only a modest ± 7 MA/m² is required for PF3 implying conventional Cu coil technology could be utilized, or possibly LTS or HTS if the thermal/neutron shielding is sufficient. Figure 15d shows that PF4 current is zero for most equilibrium scenarios and has non-zero current only for low $l_i \leq 0.5$. Figure 15e shows that PF5 has a significant positive current/current density used to extend the divertor strike-point to larger major radius as shown in Figure 11. Figure 15f shows that the PF6 current is small for low and intermediate β_N values for $l_i = 0.5-0.75$ but can have significant negative values for lower or higher l_i . Figure 15g shows that the PF7 current is highest in magnitude for the lowest l_i decreases to nearly zero current at the highest l_i . In contrast, as shown in Figure 15g, the PF8 current changes sign and varies from approximately 20MA/m² to -20MA/m² as l_i is varied from the lowest to highest values. Coils PF4-7 all have current densities that exceed 20MA/m² for at least some equilibrium configurations and would therefore require either high critical-current-density-strand LTS or advanced HTS magnets.

2.3. Divertor Power Handling

As discussed in Section 2.2.1, incorporating a divertor geometry capable of mitigating the projected high parallel heat flux of the divertor scrape-off-layer (SOL) is critical to the overall design of an ST-FNSF. Recent assessments of the divertor heat flux scaling in tokamaks [132, 133] finds an unfavorable scaling with plasma current in which the scrape-off-layer (SOL) heat flux width scales nearly inversely with plasma current. If realized, such SOL narrowing at high current projects to very narrow heat-flux channels and high peak heat flux values in next-step devices including ITER. The reference ST-FNSF scenario considered here has $R_0 = 1.7$ m, $P_{fusion} = 160$ MW, $P_{NBI} = 80$ MW, and $Q_{DT} = 2$. Assuming $Z_{eff} = 2.0$, $\bar{Z} = 1.25$, and $\bar{A} = 1.6$ in the Goldston heuristic heat-flux model [133] and using other ST-FNSF parameters, the projected poloidal-average $\lambda_m = 1.8$ mm with an outboard midplane value $\lambda_m^* = 0.8$ mm [132]. Taking $\lambda_{sol} = \lambda_m^* = \lambda_{Goldston}^*$ appears to be a reasonable estimate [134], but the power-spreading value (the parameter S in the Eich model) appears to be more divertor geometry dependent

and not amenable to scaling from simple divertor or main plasma parameters [134, 135].

In order to proceed, it is assumed that $w_{pvt} \approx \lambda_{sol} \approx \lambda_{Goldston}^*$ in the Makowski nomenclature [134] as may be appropriate for more closed divertor geometries and small $\lambda_{sol} \approx 1\text{mm}$ [135]. The integral heat flux width is then given approximately by [134] $\lambda_{Eich-int} = \lambda_{sol} + 1.64w_{pvt} \approx 2.1\text{mm}$ and this width can be used to relate the total power flux in the SOL to the peak heat flux at the target. It is further assumed that 80% of the total power flux is radiated away either from the core or edge prior to reaching the divertor target plate, that the SOL heat flux is evenly split between upper and lower divertors, and that 80% of the total SOL heat flux is exhausted to the outboard divertors (see Section 2.2.2). Figures 16a and b show that the peak divertor heat flux on the outboard divertor is below $10\text{MW}/\text{m}^2$ with the above assumptions. Figures 16c and d show a significant shift between the strike-point radius (vertical dashed line) and the location of peak heat flux due to the assumed power spreading into the private flux region along the long divertor leg. Without this spreading, a pure exponential heat flux profile would have a peak perpendicular heat flux of nearly $20\text{MW}/\text{m}^2$. Figure 16e shows the poloidal field lines are nearly tangential to the target plate with an angle of incidence of 2° at the divertor strike-point, and Figure 16f shows the total magnetic field-line angle of incidence is $\approx 1^\circ$ at the strike-point.

Similarly, Figures 17a and b also show that the peak divertor heat flux on the inboard divertor is also below $10\text{MW}/\text{m}^2$ with the above assumptions. However, Figures 17c and d do not show a significant shift between the strike-point radius (vertical dashed line) and the location of peak heat flux because the assumed spreading width $w_{pvt} \approx \lambda_{sol}$ is much narrower than the highly poloidal-flux-expanded strike-point region which is relatively close to the primary x-point. Figure 17e shows the poloidal field lines are nearly perpendicular to the target plate with an angle of incidence of 87° at the divertor strike-point, and Figure 17f shows the total magnetic field-line angle of incidence is again $\approx 1^\circ$ at the strike-point. It is important to note that conditions with peak heat flux $\leq 10\text{MW}/\text{m}^2$ in both the outboard and inboard divertors are in principle obtainable without detachment, and detached conditions would further reduce the peak heat flux and reduce sputtering and erosion.

To more accurately examine the prospects for achieving heat fluxes $\leq 10\text{MW}/\text{m}^2$ and temperatures of 2-10 eV in the divertor region of ST-FNSF [110, 136], simulations of the SOL and divertor have been carried out using the SOLPS code [137]. This code uses a 2D fluid treatment of the plasma transport (using the B2 code [138]), coupled to a Monte-Carlo neutral transport calculation of the recycled neutrals (using EIRENE [139]). These calculations use similar assumptions as used in initial SOLPS calculations comparing different power exhaust geometries [110] and those assumptions are repeated here. In particular, transport is assumed to be classical parallel to the

magnetic field (with kinetic corrections), and cross-field transport is governed by user-specified anomalous transport coefficients. Since a physics-based prediction of these coefficients is not readily available, they have instead been chosen to produce a SOL width that is in the range predicted by the multi-machine scaling experiments. The power flowing to the plasma edge is input as 50 MW in the simulations; i.e., it is assumed that 55% of the 110 MW total plasma heating power (80MW NNBI, 30MW alpha heating) is dissipated by radiation from the core. The assumed edge power is still well above the L-H transition threshold [140], estimated to be 15-30 MW. The density at the core-most grid cell is set as a boundary condition and is used in the density scans to be described below. Radiation from nitrogen seeding at a fixed fraction of 2% is included.

Figure 18 shows SOLPS simulation results for two combinations [110] of particle diffusivity (D) and perpendicular thermal conductivity (χ) with a fixed ratio of $D / \chi = 0.3 = 0.3 \text{ m}^2\text{s}^{-1} / 1 \text{ m}^2\text{s}^{-1}$ (blue) and $0.075 \text{ m}^2\text{s}^{-1} / 0.25 \text{ m}^2\text{s}^{-1}$ (red) to scan a range of heat-flux widths consistent with existing models and heuristic estimates. Figure 18 shows several exhaust parameters as a function of electron density at the outboard mid-plane (OMP) (n_e^{OMP}) including: (a) electron temperature at divertor target, (b) parallel heat flux at divertor target, (c) peak perpendicular heat flux at target, (d) full-width half-maximum parallel heat-flux width, (e) integral heat flux width at divertor target, (f) electron density at target, (g) parallel particle flux at target, (h) perpendicular particle flux at target, (i) total radiated power in divertor, and (j) radiated power in outer scrape-off-layer (SOL). Unless otherwise noted, these parameters are computed on flux-tubes $\approx 1.07\text{mm}$ into the SOL as measured at the outboard midplane. As is evident from Figures 18a-c, substantial reductions in divertor target plasma temperature and parallel and perpendicular heat fluxes occur in the range of $n_e^{OMP} = 0.25\text{-}0.4 \times 10^{20} \text{ m}^{-3}$ for the range of diffusion coefficients treated. As shown in Figure 18e, the computed integral heat flux width $\approx 1.5\text{mm}$ for the $D / \chi = 0.075 \text{ m}^2\text{s}^{-1} / 0.25 \text{ m}^2\text{s}^{-1}$ case (red) is somewhat below the empirically estimated value of $\approx 2.1\text{mm}$ indicating that this narrower SOL width case may provide an upper bound on peak heat fluxes that might be expected. For this narrowest SOL case there is potentially a relatively narrow density operating window $n_e^{OMP} = 0.35\text{-}0.4 \times 10^{20} \text{ m}^{-3}$ that simultaneously satisfies $q_{\perp}^{MAX} \leq 10\text{MW/m}^2$ and $1\text{-}2 \text{ eV} \leq T_e^{TARGET} \leq 10\text{eV}$, i.e. a temperature range that avoids complete detachment and large material sputtering. As shown in Figures 18f-h, the target density and particle fluxes rise secularly as the edge density is increased until the onset of complete detachment ($n_e^{OMP} \geq 0.4\text{-}0.45 \times 10^{20} \text{ m}^{-3}$) after which these parameters decrease while the radiated powers remain roughly constant as shown in Figures 18i-j. If the SOL heat-flux width is wider than obtained in this most pessimistic calculation, then the density operating window for $q_{\perp}^{MAX} \leq 10\text{MW/m}^2$ could be significantly wider

as shown by the blue curves in Figure 18c, although T_e^{TARGET} would exceed 10 eV.

If a wider heat-flux width is not accessible, increasing the edge radiation fraction is an option, but could degrade core energy confinement [112]. Increasing the core radiation fraction is another potential option to increase the divertor density operating window, but thermal stability of the core plasma would need to be assessed [112], though it should be noted that thermal stability should be improved by the modest $Q \approx 2$ of the ST-FNSF operating point considered here. It should also be noted that there is significant flexibility in the radiating impurity and electron density operating point since the nominal line-average density of $3 \times 10^{20} m^{-3}$ (at $f_{Greenwald} = 0.8$) exceeds the above identified OMP density for detachment control by a factor of 7-8, and provides a factor of two in density reduction flexibility even if the OMP density is only 25% of the line-average. Finally, more recent UEDGE calculations including an up-stream cryo-pumping duct and baffling for long-leg divertors like those shown here indicate the detachment front may remain stable even under fully detached conditions [136], and this could allow operation over a relatively wide density operating range while remaining fully detached. Issues such as these are planned to be studied in upcoming MAST-U divertor experiments [12] and could also be studied at conventional aspect ratio and high-field in the proposed ADX experiment [141].

2.4. Plasma Sustainment and Ramp-up

Neutral beam injection has been identified as well-suited to providing heating and current drive for ST-FNSF as described in Section 2.1.5. However, while neutral beams have positive attributes including high current drive efficiency, no accessibility/density limit, and no plasma facing components near the plasma boundary, neutral beams do require substantial test-cell floor space and can require large apertures and penetrations in the first-wall and blanket which can adversely impact neutron shielding and reduce tritium breeding. There are also practical limits on maximum tangency radius of injection due to space constraints between the toroidal field coil outer legs and due to maximum toroidal field ripple constraints. Further, whatever NBI configuration is chosen for the high-performance phases of ST-FNSF operation, the same systems must also be compatible with providing NBI plus bootstrap current overdrive since ST-FNSF will have no or only a small ohmic solenoid. For all these reasons, careful consideration must be given to the injection geometry of the NBI systems to make the NBI compatible with the overall physics, engineering, and neutronics constraints.

2.4.1. Neutral Beam Current Drive Optimization

An important constraint on the overall device design and in particular heating and current drive system is that sufficiently high plasma current can be sustained to confine

D-T fusion alpha particles even in the absence of alpha heating. With this capability it is in principle possible to continuously vary the fusion power by varying the mix of D and T fuel from pure D-D to 50-50% D-T. Figure 19 shows how negative neutral beam injection (NNBI) current drive efficiency (in kA/MW) scales with injection energy and tangency radius of injection as calculated using the free-boundary TRANSP code [142, 143] and NUBEAM [13, 14, 15] module. The target plasma is fixed for this scan and has $A=1.8$, $R_0=1.7\text{m}$, $B_T=2.9\text{T}$, $I_P = 7.5\text{MA}$, $f_{GW} = 0.7$, $q_{min} = 2.2$, $q_{95} = 8.9$, and $\beta_N = 4.1$ consistent with $H_{98}=1.2$ if 80MW of DD NNBI was injected and absorbed. Scaled NSTX temperature and density profiles are used and have $T_e(0) = 8.6\text{keV}$ and $T_i(0) = 11.6\text{keV}$, but these profiles are not consistent with neoclassical ion thermal transport. The Z_{eff} profile is held fixed in all scans and has a value of 2 from the magnetic axis to approximately $r/a = 0.7$ and increases to 2.5 at the plasma boundary. As shown in Figure 19a, the current drive efficiency increases rapidly with injection energy from 0.1-0.35MeV, then increases more slowly up to 0.5MeV, and above 0.5MeV increases little or begins to decrease slightly at large R_{tan} due to shine-through. The maximum CD efficiency is achieved for $R_{tan} = 2.3\text{-}2.4\text{m}$ for a $R_0=1.7\text{m}$ ST-FNSF device. Thus, the optimal injection energy is apparently 0.5-0.75MeV, and the optimal radius range is approximately $R_{tan} = 1.7\text{-}2.4\text{m}$ for control of $J(r)$ and $q(0)/q_{min}$ while avoiding excessive shine-through at larger R_{tan} . However, the lower E_{NBI} value = 0.5MeV in this optimal range is chosen to reduce fast-ion losses at lower I_P values during the current ramp-up as discussed in Section 2.4.3. Figure 19b shows the non-inductive CD fraction that would be achieved for a $I_P=7.5\text{MA}$ D-D target plasma heated with 60MW of NNBI and shows that fully non-inductive operation at this plasma current would require some power to be injected with $R_{tan} > 2\text{m}$ if $E_{NBI} < 0.5\text{MeV}$. These calculations also enable optimization of the power versus tangency radius of injection in order to provide a desired total current density profile with $q_{min} > 2$ without generating deep reversed shear. Such a power versus tangency radius optimization is utilized in the next section to study fully-non-inductive equilibrium profile dependence on confinement and density.

2.4.2. Steady-state Scenario Dependence on Density and Confinement

To more systematically and self-consistently investigate the plasma performance as a function of confinement and density, free-boundary TRANSP and NUBEAM are again used taking scaled electron density and temperature profiles from NSTX but this time solving for the ion temperature profile assuming neoclassical ion thermal transport across the entire profile. The NNBI has injection energy $E_{inj} = 0.5\text{MeV}$ and the injection geometry and source powers are fixed with values $R_{tan} = 170/201/231/240\text{cm}$ and $P_{NBI} = 5/25/25/25\text{MW}$ for 80MW total injected power. The confinement multiplier H_{98} and normalized density f_{GW} are varied to assess scenario performance. D-D plasmas with

$R_0 = 1.7\text{m}$ and $B_T = 2.9\text{T}$ are assessed first to establish a performance baseline in the absence of alpha heating.

As shown in Figure 20a for D-D plasmas, the total β_N is primarily a function of H_{98} and $\beta_N \leq 6$ for all density and confinement values used. Figure 20b shows that the thermal fraction of the total β_N increases if either H_{98} or f_{GW} are increased. Figure 20c shows that the plasma current is maximized by increasing confinement or decreasing density, and the achievable plasma current in D-D is $\sim 10\text{MA}$ at $H_{98}=1.5$ and $f_{GW}=0.5$. Figure 20d shows the beam current drive fraction is minimized to 20-25% for the highest density and confinement multipliers considered. Figure 20e shows the expected small fusion power for these D-D cases, and Figure 20f shows that q_{min} remains above 1 for all confinement and density cases considered, and maintaining $q_{min} \geq 2$ requires maintaining $f_{GW} > 0.6$.

Otherwise identical confinement and density scans have been performed assuming 50-50% D-T main ion composition as shown in Figure 21. As shown in Figure 21a the total β_N is again primarily a function of H_{98} , but due to the additional alpha heating, β_N values up to 8-9 are accessible for $H_{98} = 1.5$, so either confinement or tritium fraction control is needed to avoid β_N limits. Figure 21b shows that the thermal fraction of the total β_N increases if either H_{98} or f_{GW} are increased with trends similar to that observed for the D-D case. Figure 21c shows that at higher confinement multipliers the plasma current depends primarily on H_{98} , and the maximum achievable plasma current would be 11-12MA at the highest H_{98} values (which are likely MHD unstable). Figure 21d shows the beam current drive fraction is 5-10% lower than for the D-D cases due to the additional alpha heating, increased thermal pressure, and increased bootstrap current. Figure 21e shows the expected strong dependence of fusion power on confinement multipliers with very high fusion powers theoretically possible at higher H_{98} . To limit $\beta_N \leq 6$ likely requires either limiting $H_{98} \leq 1.35$ or decreasing the NNBI power and this would limit the maximum fusion power to approximately 300MW. Figure 21f shows that q_{min} again remains above 1 for all confinement and density cases considered, but q_{min} decreases more rapidly with increasing high H_{98} than observed for D-D targets.

Figure 22 shows TRANSP calculations of various profiles of a representative FNSF scenario. For this scenario, $H_{98} = 1.3$, $f_{GW} = 0.7$, $I_P = 8.9\text{MA}$, $B_T = 2.9\text{T}$, $f_{NICD} = 100\%$, $f_{BS} = 65\%$, $P_{NBI} = 80\text{MW}$, $E_{NBI} = 0.5\text{MeV}$, $P_{fusion} = 200\text{MW}$, $Q_{DT} = 2.5$, $\beta_N = 5.5$, $W_{tot} = 58\text{MJ}$, and $W_{fast}/W_{total} = 14\%$. The alpha loss power is dominated by bad orbit loss which is 2.6% of the total heating power. Figure 22a shows that the ion temperature exceeds the electron temperature in the plasma core for the assumed neoclassical thermal ion diffusivity, and this is representative of hot-ion H-mode operation. Figure 22b shows fully non-inductive operation with the bootstrap current density peaking at mid-radius and in the pedestal region, and the NBI current density

peaking on axis and at mid-radius. As shown in Figure 22c, the assumed electron density profile is centrally peaked, and like the electron temperature profile is scaled from NSTX results and is not computed from first-principles transport calculations. As shown in Figure 22d, the safety factor profile has $q_{min} > 2$ and $q(0) = 3.5$, and additional variations of injection radius, density, and confinement can be used to modify the minimum q and q -shear in the core region (not shown).

2.4.3. Plasma Current Ramp-up

Since ST-FNSF devices will have either no central solenoid or only a very small start-up flux, plasma current ramp-up via current overdrive is a critical issue. Non-inductive current ramp-up is envisioned to be achieved by non-inductive overdrive ($> 100\%$ non-inductive current drive) using the same current drive systems used for sustainment, i.e. neoclassical bootstrap current and NBI current drive. To study the achievable range of plasma currents that can be supported using NNBI + bootstrap current, systematic scans of beam tangency radius combination, turn-on sequence, source power, and voltage were performed using the same simulation methodology used in Section 2.4.2 but with fixed confinement multiplier $H_{98} = 1.15$ in the range of experimentally achieved values, fixed normalized density at a relatively high $f_{GW} = 0.95$ to maximize beam absorption at low plasma current, and assumed D-D operation with no additional alpha heating power. An important goal of these scans is to identify scenarios with low fast-ion losses, either monotonic or only weakly-reversed q shear over a wide range of total power and plasma current, and a smooth trajectory of all global parameters of interest from low to high current $I_P = 2-8$ MA. Preference is given to scenarios that only utilize a fixed subset of the available beam tangency radii, can utilize a simple sequential beam turn-on, and that use the ST-FNSF baseline NNBI beam energy of $E_{NBI} = 0.5$ MeV.

Two favorable NBI scenarios have been identified from these scans, and Figure 23 plots the total (non-inductive) plasma current versus total and individual source NBI heating power for these two cases both with fixed TF coil current corresponding to $B_T = 2.9$ T at $R_0 = 1.7$ m. As seen in the Figure, the $R_{TAN} = 200$ cm source is used first at low I_P , followed by either the 210 or 220cm source, and finally the 170cm source is used at the highest current values at lower power for central q control. The two optimized cases have the same $R_{TAN} = 170/200/210/220$ cm injection tangency radii but two different beam voltage combinations: 0.5/0.1/0.5/0.5 MeV (solid) and 0.5 MeV for all R_{TAN} (dashed), and the variation in 200cm NBI energy is used to bracket the effect of beam energy on central q value (and other parameters) at low plasma current. In all of these scans, an artificially high plasma resistivity is used to accelerate TRANSP calculation of equilibrated fully-noninductive current profiles to approximate a nearly-equilibrated slow ramp-up that might be used in an actual ST-FNSF ramp-up.

Figure 24 shows the global parameter variations versus current for the power trajectories shown in Figure 23. Figure 24a shows the fixed H_{98} and f_{GW} and shows the thermal stored energy fraction W_{th}/W_{tot} increases from 70-80% at $I_P \approx 2\text{MA}$ to 90% at full current, and the fraction of pressure-gradient-driven (bootstrap + diamagnetic) current $f_{\nabla p}$ increases from 45-50% to 60-65%. Figure 24b shows β_N increases from 3-3.5 to 4.5 at full current, while the elongation κ increases from 2 to 2.6 as the internal inductance l_i decreases from 0.8-0.9 to 0.6 from low ($I_P = 2\text{MA}$) to high ($I_P = 7\text{MA}$) current. Figure 24c shows $q_{95} \approx 7 - 9$ at low current and has a similar value $q_{95} \approx 8$ at high current $I_P = 7\text{MA}$, while the cylindrical kink safety factor q^* decreases from 6 to 4 from low to high current. The q_{min} and q_0 curves show that the q profile is monotonic at lower current, but weakly reversed for I_P above 4MA. These curves also show that the lower $E_{NBI} = 0.1\text{MeV}$ of the $R_{TAN} = 200\text{cm}$ source (solid) helps maintain q_{min} above 2 for all ramp-up currents. In contrast, higher $E_{NBI} = 0.5\text{MeV}$ for this source can drive too much central current and lower q_{min} to 1 at lower $I_P = 2\text{MA}$. This comparison shows the increased sensitivity of the q profile to beam energy and injection radius at lower current values, and illustrates that more than one injection radius may be needed at low power to maintain $q_{min} > 2$ if elevated q is necessary for MHD stability.

Figure 24d shows the plasma stored energy increases from 4 to 30-40MJ from low to high current and power, and the toroidal beta β_T increases from 3 to 12%. Figure 24e shows the volume-average ion temperature $\langle T_i \rangle$ increases from 3 to 5.5keV, $\langle T_e \rangle$ increases from 2 to 4.8keV, and the volume-average electron density increases from 0.6 to $2 \times 10^{20}\text{m}^{-3}$. Figure 24f summarizes NBI power losses normalized to the total injected NBI power and shows that shine-through (ST) is the largest loss mechanism and decreases from 0.4-2% to 0.1% at higher current. As expected, the highest injection energy (0.5MeV) has the highest shine-through loss at the lowest current since this corresponds to the lowest target density and longest beam attenuation length at fixed Greenwald fraction. Charge exchange (CX) losses are highest for the lowest current and lowest E_{NBI} at low current, but these losses remain below 0.5%. Bad-orbit losses (BO) are significantly lower than either shine-through or charge-exchange, and remain below 0.1% for all currents treated. Overall, these results indicate that with careful selection of equilibrium parameters, beam losses can be maintained below a few percent even at the $I_P = 2\text{MA}$, and for low $E_{NBI} = 0.1\text{MeV}$ at low current, even lower plasma currents should have acceptable beam losses. These results imply that if a suitable D-D target plasma of 2MA (and possibly lower current) can be established, the ST-FNSF NBI system analyzed here can be used to ramp the plasma current to 7-8 MA, and this current level is suitable for confining alpha particles from D-T fusion reactions and for accessing fully non-inductive scenarios with 100-200MW of fusion power.

2.4.4. Plasma Current Formation

A remaining very important issue is generation of the initial target current of 1.5-2MA needed for efficient NBI absorption for plasma current ramp-up as described in Section 2.4.3. Plasma current initiation [144] is being investigated on a range of ST experiments world-wide and several options are being pursued [145]. NSTX-U start-up research will build upon NSTX results and continue to develop transient Coaxial Helicity Injection (CHI) [146] as a means of creating a high-current target plasma of 400kA which extrapolates to approximately 2MA in an ST-based FNSF [27].

A key concern for CHI in a nuclear environment is where and how to provide sufficient insulation to allow nominally axisymmetric voltage biasing to create the initial open-field-line plasma arc that ultimately generates a closed-flux tokamak plasma. Using proposed ST-FNSF blanket configurations described in more detail in Section 4.2, analysis has already been performed to assess the viability of incorporating CHI voltage biasing within dual-coolant lead lithium (DCLL) blanket modules [147]. Figure 25 shows example concepts for incorporating electrical insulators in dual-coolant lead-lithium (DCLL) blanket segments to support voltage biasing for CHI start-up in ST-FNSF. Figure 25a shows an “NSTX-like” [148, 147] concept in which the blanket would be supported off the outer vessel using the green insulating plates and sandwiched between metal supports and the assembly bolted together using insulating bolts. Note that this figure shows a view of the blanket structure only. Figure 25b shows a “DIII-D-like” [149, 147] concept in which a toroidal electrode would be installed on top of the blanket and separated from the rest of the blanket using the green toroidal insulator plate. Note that for this configuration the green insulating sections for insulating the piping system are not required. For both concepts, if MgO was used as the insulating material, the blanket module provides sufficient shielding to keep the radiation damage below an estimated damage limit of 10^{11} Gy for MgO [150, 151, 152].

3. Device Configuration and Maintenance

Several ST-FNSF equilibrium, divertor, PF and TF coil, center-stack, vessel, and blanket configurations and maintenance strategies were studied [124, 153] prior to down-selecting to the final configuration discussed here [154]. ST-FNSF engineering details relevant to the physics design are described for completeness and context.

3.1. Central Magnet Concept

As described in Section 2.2, strong plasma shaping will be important for operating with sufficient stability margin for FNSF applications, and would be essential for accessing advanced operating modes with very high β and fusion performance as

shown in Figure 9. In particular, achieving high triangularity δ is essential at high elongation to achieve high ST stability limits [17]. Further, increased triangularity generally increases peeling-ballooning limits and the achievable confinement in the H-mode pedestal region [155, 156, 157, 158]. Achieving high- δ can be challenging in the ST configuration since at least one set of divertor poloidal field (PF) coils is required to be both inboard and close to the divertor x-point. This is challenging in a nuclear environment since neutron damage to the PF coil insulation can substantially reduce the lifetime of the insulator and hence the coil.

Figure 26 shows a potential solution [124] to the divertor coil challenge in which PF coils in a “Bitter plate” configuration are installed at the ends of the TF central rod and the center-stack shield and the toroidal field Cu conductor together help shield the PF coils from neutron damage. Unlike conventional magnets wound from coils of wire or cable, Bitter magnets are constructed of circular conducting metal plates with insulating spacers stacked in a helical configuration. Figure 26a shows conceptually how Glidcop conducting plates might be plasma-sprayed with MgO to provide plate-to-plate insulation. Figure 26b shows how multiple plates could be stacked to form a coil with vertically aligned water coolant channels interfaced to centerpost coolant channels. Figure 26c shows the two coils structurally supported together in a cylinder, and Figure 26d shows the location of the upper divertor PF coil cylinder in the end of the centerpost.

The single-turn toroidal field coil in the ST-FNSF centerstack [124] could use NSTX-U-like TF wedge segments [159] that are brazed or pressed-fit together (rather than insulated). Such wedging would enable NSTX-U-like grooves in the wedge face plus a welded tube for water cooling. Alternatively, the cooling channels could be formed from gun-drilled holes. Figure 27 shows a possible assembly/fabrication sequence for the TF bundle starting from individual wedges/plates, to sub-assemblies/quadrants, to a full brazed center-post, to the final addition of vacuum vessel wall and inboard divertor plasma-facing components modules and divertor poloidal field coils.

3.2. Arrangement and Maintenance

Figure 28 shows the general arrangement of the complete $R_0=1.7\text{m}$ device. The central magnet is shown in orange as is the rest of the copper magnet system. The embedded Bitter plate Cu PF coils are shown at the top and bottom of the central magnet, and the horizontal outer TF legs have a felt-metal sliding joint with the central magnet. Similarly, there are felt-metal sliding joints between the horizontal and vertical TF outer legs. The TF coil leads for each individual outer leg exit the device at the bottom at large major radius. The centerstack, vacuum vessel (gray), blanket-shield modules (red/pink), poloidal field coils (blue/gray), and torsional loads are all supported by the

large external support structure (also gray) that surrounds other core components.

A key potential advantage of the ST for FNSF applications is modularity of the overall configuration due in large part to the demountability of the normally conducting TF coils. The cylindrical geometry of the ST configuration naturally lends itself to a vertical maintenance strategy. Figure 29 shows the ST-FNSF design enables independent removal of either the TF centerpost or the blanket system. This removal is accomplished by removal of the magnetic system upper beam structure, TF horizontal legs, and re-weldable vacuum vessel lid which contains a local cryostat containing any superconducting upper PF coils. The blanket feeder pipes are evident in the bottom of the vacuum chamber when the blanket system is removed. These pipes are fed by larger manifolds outside the core machine.

Figure 30 shows a possible ST-FNSF test-cell arrangement from several different vantage points. Figure 30a shows a side view of the core device (without centerstack) showing the JT60-SA NNBI layout modified to have 3 vertically stacked sources instead of 2 and up to 8.5MW per source, and with the beam cross-over point near the vacuum vessel boundary just behind the blankets to minimize the port size, fit between the outboard PF coils, and minimize the blanket aperture size required for the beams. Figure 30b shows a horizontal mid-plane slice cutaway view showing the central magnet, blankets, TF coils, support structure, but most importantly the layout of the 4 NNBI systems showing the various tangential access ports and also the placement of the beams (all aiming in the co-plasma-current direction) on opposite sides of the device to reduce the overall test-cell building volume. The four beams shown have representative tangency major radii of $R_{tan} = 170/210/230/240\text{cm} = R_0 + r_{tan}$ where $r_{tan}/a = 0/0.4/0.6/0.7$, and this arrangement is very similar to that assumed for the TRANSP calculations shown in Figure 22.

The configuration shown in Figure 30b has 12 TF coils, and the NNBI ducts do fit in the space available, but additional space for future further optimization of tangency radius and/or additional duct shielding is feasible if the number of TF coils N_{TF} is reduced to $N_{TF} = 10$ as shown in Figure 30c. Because the major radius of the vertically straight TF outer legs ($R_{TF} = 5.85\text{m}$) is large compared to the plasma outboard-midplane separatrix radius ($R_p = 2.65\text{m}$), the toroidal field ripple [160, 161] $\delta \approx (R_p/R_{TF})^{N_{TF}} = 0.036\%$ for $N_{TF} = 10$ is small compared to values that might degrade edge rotation, pedestal confinement, or fast-ion confinement [162, 163, 164, 161]. ST-FNSF options with $N_{TF} = 12$ would have very small ripple values $\delta \approx 7.5 \times 10^{-5}$, and either $N_{TF} = 10$ or 12 should be acceptable from a confinement physics standpoint.

Figure 30c shows the large test-cell area above the device core enabled by a vertical maintenance approach. This space would be used for assembly/disassembly of various large components including the blanket assemblies and TF centerstack after removal

of the dome structure, upper TF horizontal legs, and vessel lid and upper PF cryostat. Figure 31 shows more details of the inside vacuum vessel boundary and upper re-weldable vacuum vessel seals that would enable this vertical maintenance approach. This figure also shows radial access ports for divertor module connection/maintenance and access to regions behind the blanket modules. Additional access for maintenance of smaller components inboard of the blankets would likely be provided via midplane radial ports via removal of materials test modules or test blanket modules.

4. Neutronics Calculations

Major radius [m]	1.68	1.00
Aspect ratio	1.75	1.75
Fusion power [MW]	162	62
Avg. $\Gamma_{neutron}$ [MW/m ²]	1	1
Number of TF coils	12	10
Number of TBM ports	4	4
Number of MTM ports	1	1
Number of NBI ports	4	3

Table 1. Parameters for $R_0 = 1.7\text{m}$ and 1m ST-FNSF devices for neutronics analysis.

The coil and component layouts shown in Figures 26-29 provide sufficient CAD detail to calculate important neutronics parameters such as shielding effectiveness and achievable tritium breeding ratio (TBR) [153]. The 3D CAD models have been coupled with the General Monte Carlo N-Particle (MCNP) Transport Code [165] using the University of Wisconsin DAGMC code [166] to accurately represent the entire torus. Two ST device sizes have been analyzed for shielding and TBR as shown in Table 1, and both devices include test blanket modules (TBMs) and a materials test module (MTM) to support the FNSF research and development mission [11]. For both sizes the assumed device lifetime is 20 years with an availability ranging from 10-50% with an average value of 30% equivalent to 6 full power years (FPY) of operation. Shielding, blanket design, and tritium breeding calculations are described by El-Guebaly [153] and several details are repeated here.

The blanket concept of choice for the ST-FNSF base blanket is the dual-cooled lead-lithium (DCLL) [167] with ferritic steel (FS) structure, LiPb breeder/coolant, SiC flow channel inserts (FCI) and helium coolant. Such “base” blankets would operate initially with reduced coolant temperature (e.g., LiPb and He inlet/outlet temperatures of 350°C/450°C). This concept requires FCI to serve as thermal and/or electric insulators [167]. If the more advanced SiC-based FCIs (that allow high LiPb

exit temperature of 700°C-800°C) cannot be developed and qualified within the FNSF timeframe, low-technology sandwich-like inserts made of a FS/alumina/FS multilayer could be employed for the base blanket. Other features of the first-generation (GEN-I) base blanket include:

1. Low-activation FS structure operating at 400°C-500°C
2. He-cooled first-wall (FW) and blanket structure
3. More uniform FW and blanket structure temperature to minimize thermal stresses
4. FCI made of SiC, if available, or sandwich-like FS/alumina/FS
5. Beryllium multiplier to enhance the breeding, if needed.

The inclusion of TBM ports in ST-FNSF offers the opportunity to test a wide spectrum of blanket concepts in an environment representative of DEMO or power plant. This includes conventional GEN-I blanket technologies (ceramic breeders and liquid breeders with FS structure operating at 400°C-500°C), moderately aggressive concepts (GEN-II blanket such as DCLL with LiPb exit temperature of 700°C-800°C), and advanced blanket concepts (GEN-III blanket with SiC/SiC composite structure operating at up to 1000°C). A staged blanket testing strategy would allow the ST-FNSF to start with a lower-technology and higher reliability base blanket, followed by a stepwise upgrade of the base blanket using results obtained from the TBMs to ultimately validate the characteristics and features of more advanced blankets [153].

4.1. Shielding and Neutron Irradiation Distribution

Figure 31 shows neutron dose calculations at the corners of the PF coil regions in both the TF centerstack and also behind the divertor exhaust region for the $R_0=1.7\text{m}$ configuration parameters from Table 1. Assuming MgO insulation of Cu conductors for the divertor PF coils (PF1 and 2) in the TF in the centerstack, the peak neutron dose (6×10^9 Gy) is well below (by a factor of 16) the present best value of the allowable limit of 10^{11} Gy [150, 151, 152]. Thus, for the PF coils in the ends of the TF centerstack, the Cu of the TF bundle not only provides the conducting path for the TF coil current but also provides shielding for the inner-most divertor PF coils. This factor of 16 shielding margin is also adequate to shield the divertor PF coils in the smaller $R_0 = 1\text{m}$ ST-FNSF. The top and bottom divertor region PF coils (PF3, 4, 5) have doses below 2×10^8 Gy and thus MgO-insulated Cu coils should have insulator radiation damage values far below 10^{11} Gy. The most outboard PF coils (PF6, 7, 8) that are shielded by both the blankets and the vessel have radiation and heating below limits for superconducting coils and are assumed to be superconducting.

To reduce resistive power consumption it would be advantageous if PF coils 3, 4, and 5 were also superconducting. Neutronics calculations indicate this may be possible

using Nb₃Sn superconductors [168, 169, 170, 171]. First, the peak nuclear heating of the PF3 coil casing for the $R_0=1.7\text{m}$ configuration is 2.2 mW/cm^3 compared to a typical limit of 2 mW/cm^3 (and 1 mW/cm^3 for the winding pack). Further, the peak PF3 dose to cyanate ester epoxy insulators in the superconducting cables is $1.1 \times 10^8 \text{ Gy}$ compared to a limit of up to $4.0 \times 10^8 \text{ Gy}$ [172]. However, the peak fast neutron fluence ($E_n > 0.1\text{MeV}$) to PF3 at 6 FPY is $1.2 \times 10^{23} \text{ n/m}^2$. This is roughly one order of magnitude above the generally accepted ITER design limit [173] of $1 \times 10^{22} \text{ n/m}^2$ for ternary or quaternary strand [174] for which there is only small degradation in critical temperature and current density. However, if binary conductor could be used, or if 20-30% degradations in critical temperature and current density in ternary/quaternary strand could be tolerated, operation up to 10^{23} n/m^2 may be possible [170] - in particular if more recently developed wires such as restack-rod-processed (RRP) or powder-in-tube (PIT) enable the critical current density to be increased at high radiation doses [175]. Thus, for the $R_0=1.7\text{m}$ configuration it appears PF4-8 could all be superconducting while PF3 might be superconducting given increased radiation tolerance and/or shielding. These calculations also indicate that PF3 and possibly PF4 cannot be superconducting in the less-well-shielded $R_0=1\text{m}$ device.

Figure 32 shows the dpa distribution throughout the structure of the $R_0=1.7\text{m}$ configuration and indicates the expected highest radiation location of the outboard midplane. The peak outboard dpa of 15.5 dpa / FPY implies 93 dpa total damage to the outboard first-wall for 6 FPY of operation. Among other effects, high temperature He embrittlement can cause intergranular fracture at low stresses, particularly for doses $> 10 \text{ dpa}$ (He concentrations $> 100 \text{ appm}$) and temperatures above 0.5 times the melting temperature [176, 177] although some ODS steels may be usable for up to 20 dpa and 200 appm He concentrations [178, 179]. Thus, the total dpa for 6 FPY level is 9 times the damage limit for 10 dpa -capable ferritic steel and calls for the further development of more radiation resistant ferritic steel structures that can handle 100 dpa or more. The TBMs and MTMs at the outboard midplane of the ST-FNSF are clearly subject to a fusion-relevant nuclear environment to help develop and test materials and components for fusion power production applications [153].

Finally, Figure 32 also shows that the inboard mid-plane Cu TF magnet peak radiation damage is $10\text{-}12 \text{ dpa/FPY}$. However, irradiation at temperatures below 150°C causes hardening in pure copper and alloys. This hardening is accompanied by severe embrittlement [180, 181] in dispersion strengthened and precipitation hardened alloys such as CuCrZr. The uniform elongation generally decreases to less than 1% even at doses as low as 0.01 to 0.1 dpa . Tensile stresses in the TF central conductor must therefore be minimized [6], and felt-metal sliding joints between the vertical and horizontal TF legs of ST-FNSF are chosen to accommodate TF vertical expansion to

Fusion Nuclear Science Facilities and Pilot Plants Based on the Spherical Tokamak 30
maintain stresses within allowable limits [124, 154].

4.2. Tritium Breeding

Achieving tritium self-sufficiency is an important requirement for a fusion system, and the relevant parameter for self-sufficiency is the tritium breeding ratio (TBR), i.e. the ratio of tritium bred to tritium consumed. A particular issue for smaller ST-FNSF devices is that it will likely be more difficult to achieve $TBR = 1$ since a higher fraction of in-vessel surface area must be dedicated to auxiliary heating ports and test modules. To begin to analyze the dependence of TBR on device size, the TBR for a range of blanket configurations has been computed for the $R_0=1.7\text{m}$ FNSF device assuming an idealized (i.e. nominally axisymmetric and homogeneous) blanket and a conventional divertor configuration with little/no breeding in the top and bottom divertor regions. Figure 33 shows these blanket configurations (light blue) and lists a TBR value for each. Figure 33a shows that the TBR of a straight blanket with a height comparable to the plasma height has $TBR=0.8$ which is significantly below 1 due to losses to the magnets and external components. Additional calculations (not shown) for this blanket vertically extended to the upper height of the vacuum boundary increase the TBR to near 1, but this does not leave room at the top and bottom of the vessel for divertor pumping or maintenance or other manifolds. Figures 33b and c show that either the additional top/bottom blanket modules or having a conformal blanket can increase the TBR to 1.05. Figure 33d extends the conformal blanket to the top and bottom of the vessel. The 3D model of the $R_0=1.7\text{m}$ design indicates that the slots in the ends of the blankets for divertor access and maintenance would modify the TBR to be approximately mid-way between the values in Figures 33c and d, i.e. the effective $TBR = 1.073$. Figure 33e shows that the inclusion of stabilizing shells (for suppressing plasma vertical instability) reduces TBR by approximately 0.03, and Figure 33f shows that 10 midplane penetrations of 0.36m^2 each (typical of the JT-60SA NNBI beam port size) would further reduce the TBR by 0.05. Thus, the approximate TBR for the $R_0=1.7\text{m}$ beam-driven ST-FNSF device is $1.073 - 0.03 - 0.05 = 0.993$, i.e. very close to 1. This nominally axisymmetric and homogeneous blanket analysis indicates that $R_0=1.7\text{m}$ is very close to the threshold for tritium self-sufficiency, and that smaller devices with relatively larger blanket penetrations will have difficulty achieving $TBR = 1$ even under idealized conditions.

More detailed fully 3D TBR calculations have also been carried out for the final $R_0=1.7\text{m}$ ST-FNSF configuration as shown in Figure 34. No approximations have been utilized in the blanket neutronics analysis, and many configuration details are retained including: (1) 2 cm wide assembly gaps between toroidal sectors, (2) Internals of two outboard (OB) DCLL blanket segments modeled in great detail, including the first-wall

(FW), side, top/bottom, and back walls, cooling channels, and SiC FCI, (3) 2 cm thick W vertical stabilizing shells between OB blanket segments, and (4) FS port walls for test blanket / materials test modules (TBM / MTM) and NNBI. As seen in Figure 34, the inner-most radial segment of the outboard blanket provides a TBR of 0.81, while the outer-most segment provides 0.15 for a total outboard blanket TBR of 0.96. Thus, to achieve $TBR > 1$ even with no penetrations or ports, additional breeding regions are needed. A key advantage of the long-legged Super-X/snowflake divertor is that the divertor strike-point region can be moved to larger major radius away from the relatively high neutron flux regions at the top and bottom ends of the centerstack. By breeding in these top/bottom end regions, the total TBR can be increased by an additional 0.07 for a total of 1.03.

Figure 35 shows the impact of including a range of midplane ports including 4 TBMs and 1 MTM with blanket front-face areas of 0.9 m^2 each, and penetrations for the negative neutral beams with aperture areas of 0.4 m^2 perpendicular to the beam-line. As shown in the figure, the TBMs provide breeding nearly as efficiently as the DCLL base blanket with an overall TBR reduction of only 1% (0.25% per TBM). In contrast, the MTM does not provide breeding which leads to a TBR reduction of 2% per port. Lastly, each of the 4 NNBI ports is sized to support 20MW of NBI power with a perpendicular aperture area of 0.4 m^2 for an average port power density of $50\text{MW}/\text{m}^2$ [182]. As discussed in Section 2.4.2, different power-splits per port (5 / 25 / 25 / 25MW) may ultimately be required to optimize the steady-state current drive profile, so specifying each of the 4 NNBI ports have the same perpendicular aperture could introduce small differences in the TBR calculations. Nevertheless, the total multi-port NNBI aperture area is the same (1.6 m^2) for the same total NNBI injected power of 80MW. The total TBR reduction from all 4 NNBI ports is 3%, i.e. an average of 0.75% per NNBI. Including all 4 TBMs, 1 MTM, and 4 NNBI ports results in an overall TBR of 0.97.

It is highly desirable to demonstrate tritium self-sufficiency in an FNSF device, and the calculated TBR for the $R_0 = 1.7\text{m}$ ST-FNSF of 0.97 is very close to unity. Several ideas/options have been identified to further increase TBR to values above 1, and these ideas are shown in Figure 36. These options include: adding to the top/bottom PF coil shield a thin breeding blanket (estimated to increase TBR by $\approx 3\%$ and requiring a Cu-conductor PF3), reducing the size of the opening to the divertor to reduce neutron leakage (and requiring a narrower range of l_i), having a uniform outboard blanket thickness (1m thick everywhere vs. 0.85m at top/bottom), increasing the LiPb flow channel dimensions and reducing cooling channels and flow-channel inserts within the outboard blanket (thermal analysis needed to confirm), and/or adding a thin breeding region to the inboard vacuum-vessel. It is expected that some combination of these

options will enable achievement of $TBR \geq 1$ for the $R_0 = 1.7\text{m}$ configuration. In contrast, the TBR for the $R_0 = 1\text{m}$ configuration (with only 3 NBI ports) is found to be 0.88 which is far enough below 1 that even if the options to increase TBR shown in Figure 36 are exploited, the TBR will very likely still be below 1. Despite this (expected) inability to achieve $TBR \geq 1$ in the relatively small $R_0 = 1\text{m}$ device, TBR of 0.88 is still substantial and would reduce the required external supply of T by a factor of $1/(1-TBR) \geq 8$ relative to not breeding any tritium.

Figure 37 shows the spatial distribution of the T production in the blanket and TBMs for the $R_0=1\text{m}$ device. Note that despite the significant area opened by the NBI penetrations, the very tangential injection allows streaming neutrons to be captured at the back of the blanket, thereby offsetting the reduction in TBR relative to what would be expected based on blanket front-face-aperture area (i.e. normal to the blanket face not the beam-line) scalings alone. This analysis also indicates the importance of having sufficiently thick outboard blankets to maximize tritium breeding in blanket modules near the tangential beam ducts. For the $R_0=1\text{m}$ device it will be necessary to purchase 0.4-0.55kg of T/FPY from outside sources at a cost of \$30-170k/g of T [183] (in 2015 USD) implying a total cost of \$12-94M/FPY. Since the expected average duty factor is 0.3, the estimated annual average cost for T is \$4-28M per year which is likely an acceptable operating cost for a major nuclear device and associated program. However, there is uncertainty in relying on external sources to supply T fuel (≈ 3 kg over 6FPY) for such a program.

Finally, Figure 38 shows a side-by-side and to-scale summary comparison of the $R_0=1.7\text{m}$ and 1m ST-FNSF configurations showing the device sizes, expected TBR values, and the TBM, MTM, and NBI port layouts. It is expected the $R_0=1\text{m}$ device would have lower electricity and capital cost but higher tritium consumption and purchase costs (assuming the $R_0=1.7\text{m}$ device can achieve $TBR=1$). Details such as the port layout could influence overall device cost in important ways. For example, the smaller $R_0=1.0\text{m}$ device may require beam injection on only 1 side of the device, and this could reduce the overall size and cost of the building housing the FNSF device. Additional analysis is required to assess device size and cost trade-offs in more detail, and such analysis is beyond the scope of the present work.

5. ST-based Pilot Plants using HTS TF Magnets

The $R_0 = 1$ and 1.7m ST-FNSF devices operating with $B_T = 3\text{T}$ at R_0 require 15 and 25.5MA of total single-turn TF rod current, respectively. Even with 12 TF legs and independent power supplies for each leg, large power supply currents of 1.25 to 2.1MA would be required to power the TF magnets. Using conventional rectifier power supplies

of 125kA each, Figure 39 shows a possible power supply arrangement and building area/footprint required to power the $R_0 = 1.7\text{m}$ ST-FNSF TF coil [154]. While vertical stacking of the power supply sections could likely reduce the power supply distance to the TF coils, the overall floorspace area is large and comparable in size to the main tokamak building. More efficient and compact power supplies based on homopolar generators [184, 185, 186, 187] could potentially significantly reduce this footprint but require significant research and development. Including the TF outer legs and current leads, the resistive power dissipation could be in the range of 150 to 250MW for the $R_0 = 1$ to 1.7m ST-FNSF devices. This translates to \$50-80M USD for cost of electricity per year at 30% duty factor and \$0.1/kWh. Further, the higher recirculating/dissipated power of a copper toroidal field coil increases the fusion power required to achieve $Q_{eng} = 1$ in ST-based Pilot Plants [3].

The obvious option to reduce power loss in the ST TF magnet system is to use superconductors [188, 189]. However, the additional inboard shielding required to reduce nuclear heating and radiation damage to acceptable levels combined with the typical need for inboard breeding for $TBR \approx 1$ all tend to make larger major radius and/or higher aspect ratio devices more attractive for fusion power production. For reference, the maximum effective current density in the $R_0 = 1.7\text{m}$ TF magnet Cu conductor is approximately $27\text{MA}/\text{m}^2$ at the smallest major radius section of the centerstack. Thus, in order for the use of superconductors to be competitive at lower-A, the effective current density must be significantly higher to provide space for additional shielding. Recent advances in HTS magnet technology potentially capable of accessing much higher current density (see Section 2.2.3) of up to $70\text{MA}/\text{m}^2$ (and possibly higher) combined with operation at higher temperature for associated reductions in refrigeration power in the presence of increased nuclear heating [190] may make it possible for lower aspect ratio superconducting configurations to still be advantageous for FNSF and Pilot Plant applications. The higher field capability of HTS is also advantageous in reducing the device size and/or increasing the MHD stability margin of the operating point as highlighted in the proposed ARC device [191] with $A=2.9$. These considerations motivate studies of projected device performance versus aspect ratio when high-field and high-current-density rare earth barium copper oxide (REBCO) superconducting HTS toroidal field magnets are utilized. Only with such studies is it possible to determine any relative advantages and disadvantages of low-A HTS-based FNSF/Pilot Plants.

5.1. Aspect Ratio Scalings for Tokamak Pilot Plants

As discussed in Section 2.1.1, the assumed β_N and κ dependence on aspect ratio plays a very strong (approximately quartic) role in the projected fusion performance of high-bootstrap-fraction ST and AT scenarios since $P_f \propto \epsilon(\beta_N \kappa B_T)^4$.

The profile-optimized no-wall beta limit is a useful guide for parameterizing $\beta_N(\epsilon)$ and is more conservative than ideal-wall stability [33] scalings. A reasonable fit to the computed no-wall limit at $f_{BS} \approx 50\%$ [17] is $\beta_N(\epsilon) = 3.12 + 3.5\epsilon^{1.7}$. Using maximum elongation data from NSTX at $A=1.45$ [192], $A=1.75$ [27], DIII-D record β_T plasmas at $A=2.9$ and high κ_x [193], and projections for the $A=4$ ARIES-AT power plant [109], a reasonable fit to the maximum achievable stable $\kappa_{x-max}(\epsilon) = 1.9 + 1.9\epsilon^{1.4}$. These modeling/experimental data points and corresponding fits are shown in Figure 40. In the calculations that follow, $\kappa_x(\epsilon)$ is reduced by 5% relative to the maximum value to provide additional stability margin, i.e. $\kappa_x(\epsilon) = 0.95 \times \kappa_{x-max}(\epsilon)$. More conservative scalings have also been proposed for tokamak DEMOs [194] with $\kappa_x(\epsilon)$ approximately 0.5 lower than the scaling proposed here, but the overall trend of decreasing κ with increasing A is otherwise similar.

The maximum achievable toroidal field B_T at the plasma geometric center R_0 is set by stress/strain limits in the TF magnet and HTS winding pack. The peak vertical stress in the inboard midplane of the TF magnet is the leading order stress, and if the inboard and outboard TF leg radii and R_0 are known, a simplified coil Lorentz force model [195] can be used to estimate the peak TF tensile stress. Then, given various assumed radial thicknesses for inboard SOL, first-wall, shield/blanket, vacuum vessel, ohmic (OH) solenoid, and clearances, the remaining radial build and cross-sectional area for TF coil winding pack and support structure can be calculated. Then, for a maximum allowable TF structural support stress of 0.66 GPa typical of stainless steel, winding pack current density ($70\text{MA}/\text{m}^2$), and winding pack stress limited to 0.4 GPa to ensure strains $\leq 0.3\%$ to avoid any stress-related degradation in critical current [196], the maximum TF current and toroidal field can be computed.

A remaining critical parameter for determining fusion performance versus aspect ratio is the inboard shielding thickness and related radiation damage threshold for significant loss of critical current I_c or temperature T_c . Recent studies for YBCO HTS tapes [197] show the fast neutron fluence ($E > 0.1\text{MeV}$) threshold for serious I_c degradation (primarily in the H||ab plane) for $T_{HTS} < 40\text{K}$ is around $3.5 \times 10^{22}\text{n}/\text{m}^2$. When combined with water coolant, tungsten carbide (WC) is found to be the most effective neutron shield for superconducting magnets [198, 188, 190], but such shielding negatively impacts the breeding of the outboard DCLL blanket in ST devices [199].

Neutronics calculations assuming a water-cooled WC shield (10-15% water by volume) show that approximately 60cm of inboard shielding is needed to provide FNSF mission-relevant peak neutron fluences of 5-6MWy/ m^2 at the outboard midplane while staying below the inboard HTS TF magnet damage limit. Figure 41 shows a simplified model of an $A = 2$, $R_0 = 1.87\text{m}$, $P_{fusion} = 550\text{MW}$ ST plasma (yellow) with a Gaussian D-T fusion source distribution (peaking at the plasma geometric center) surrounded

by inboard shielding and outboard breeding blankets used to compute fast neutron attenuation through a WC shield and incident on a center column containing an HTS TF magnet. The model's non-plasma regions are shown in Figure 41a and are assumed to be homogeneous in composition. The center column (pink) composition is 57% copper, 38% steel, and 5% helium. The inboard shield (purple) is 87% WC and 13% water, and the outboard first-wall (yellow) composition is 90% steel, 5% chromium zirconium copper, and 5% helium. Finally, the outboard blanket (green) is assumed to be a solid breeder of 15% lithium orthosilicate, 55% beryllium multiplier, 20% helium, and 10% steel. The type of outboard breeding blanket (solid vs. liquid) is not expected to significantly impact the inboard shielding requirements. As shown in Figure 41b for a 60cm inboard shield thickness, the first order of magnitude of fast neutron flux attenuation has a decay length of 15cm, subsequent decadal decay lengths decrease from 13 to 12cm, and the effective decay length per decade for the full 60cm shield is 13.4cm. More detailed calculations including ferritic steel structure (which has lower neutron attenuation) to support and contain the WC and water coolant indicate longer shield-averaged decay lengths of 15-16cm per decade.

As shown in Section 4.2, no or only small inboard breeding may be required to achieve $TBR \approx 1$ if the aspect ratio is sufficiently low ($A=1.7-1.8$), the major radius is sufficiently high ($R_0 \gtrsim 1.7m$), and long-leg divertors are used to enable breeding at the top and bottom of the central column. Neutronics studies indicate that if the aspect ratio is increased to $A=2$, some inboard breeding (10cm thick DCLL covering most of the high-field/inboard side) is needed to achieve $TBR \approx 1$ assuming a 1m thick conformal outboard DCLL breeding blanket. Previous calculations indicated that for $A=4$ AT Pilot Plants [3] 40cm of inboard breeding blanket, 40-50cm of inboard shielding, and 80cm of outboard breeding blanket are sufficient for $TBR \approx 1$. From these results it can be concluded that inboard breeding blankets must be roughly twice as thick as WC shielding to achieve the same shielding effectiveness. With these parameters it is possible to construct an approximate shielding and blanket thickness scaling versus aspect ratio that achieves $TBR \approx 1$ and shields the HFS HTS TF magnet sufficiently well to access peak outboard neutron fluences of 5-6MWy/m². The thicknesses for this approximate scaling are shown in Figure 42. The net result is that thicker inboard blankets and overall shield + blanket thicknesses are needed at higher A to achieve $TBR \approx 1$ at the same effective shielding as 60cm of WC. More complete 3D calculations of TBR are planned to accurately compute shielding and blanket thickness requirements versus aspect ratio, but Figure 42 should capture the leading order trends.

5.2. Fusion Performance versus Aspect Ratio

With the baseline shielding and breeding requirements chosen as shown in Figure 42, scaling studies find that a plasma major radius of $R_0 = 3\text{m}$ can achieve both peak neutron fluences of at least $5\text{-}6\text{MWy/m}^2$ and also $Q_{eng} \geq 1$ for a wide range of aspect ratios and confinement assumptions. This finding motivates the choice of fixed plasma major radius $R_0 = 3\text{m}$ for all HTS FNSF / Pilot Plant calculations that follow. For these scaling studies the Greenwald fraction is again chosen to be 0.8, 0.5 MeV NNBI is assumed for heating and CD, and P_{NBI} is fixed at 50MW unless otherwise noted. H_{98} is adjusted to achieve full non-inductive current (bootstrap + NBI) and hold the total $\beta_N(\epsilon)$ fixed as shown in Figure 40. The q^* value is not constrained but is typically above 3. The same power production assumptions from Section 2.1.6 and Equation 1 are used but with $\eta_{th} = 0.45$ and $\eta_{aux} = 0.3$ (instead of 0.4).

Figure 43 shows the magnetic field resulting from the scans of aspect ratio A and effective (i.e. relative to water-cooled WC) inboard shielding thickness Δ_{sh-eff} . The reference scenario has $\Delta_{sh-eff} = 60\text{cm}$, and for these scans, the thickness of the inboard shield and any inboard blanket are assumed to scale linearly together so all aspect ratios have the same Δ_{sh-eff} . This also implies any aspect ratios that require inboard breeding will have $\text{TBR} < 1$ when $\Delta_{sh-eff} < 60\text{cm}$. The range $\Delta_{sh-eff} = 30\text{-}70\text{cm}$ is chosen to scan from very thin shields where refrigerator power limits due to nuclear heating become important even at elevated magnet temperatures $T=20\text{-}40\text{K}$ [190] to relatively thick shields that should provide magnet lifetimes several times longer than needed for achieving FNSF-relevant neutron fluences.

Figure 43a shows that for the thinnest effective shields (30cm) the vacuum toroidal field B_T at the geometric center $R_0 = 3\text{m}$ increases from 4 to 9T as the aspect ratio A is varied from $A=1.6$ to 4. Each 10cm increment in shielding reduces B_T by 0.7T at the lowest aspect ratios and by 0.45-0.5T at the highest aspect ratios. However, as expected, the relative reduction in field is much larger at low-A. For example, increasing the shield thickness from 30cm to 60cm reduces the $A=1.6$ field by a factor of 2 but reduces the field in the plasma by only 16% at $A=4$. Figure 43b shows that the peak field at the TF magnet is between 17T and 19T for nearly all configurations except for the lowest-A cases with thicker shields. Clearly the ability of HTS to remain superconducting at high field is critical to taking advantage of the higher winding-pack current density assumed for these configurations.

Figure 44 plots the fusion and electricity gains and fusion and net electrical powers for the aspect ratio and shielding thickness scans. Figure 44a shows that for thinner shields the fusion gain is maximized near $A=1.8$ with $Q_{DT} > 20$. The fusion gain is nearly independent of A between $A=1.9$ and 2.5 for $\Delta_{sh-eff} = 60\text{cm}$ and is maximized near $A=2.5\text{-}2.7$ for $\Delta_{sh-eff} = 70\text{cm}$. As stated previously, for these scans the auxiliary

power is fixed at $P_{NBI} = 50\text{MW}$ and the confinement is adjusted to operate at the nominal no-wall β_N limit shown in Figure 40. These results are consistent with the finding that $A < 2$ scenarios have the potential for high fusion gain for thin inboard shielding [200] provided the shield is thick enough to have acceptable refrigeration power for the HTS TF magnet [190]. Figure 44b shows that all aspect ratios can make net electricity for the thinnest shield cases, Q_{eng} is nearly independent of A (at $Q_{eng} \approx 1.4$) between $A = 1.9$ and 2.5 for $\Delta_{sh-eff} = 60\text{cm}$, and $Q_{eng} \gtrsim 1$ for $A = 2$ to 3 for $\Delta_{sh-eff} = 70\text{cm}$. Figures 44c and d show that for the reference $\Delta_{sh-eff} = 60\text{cm}$ configuration and between $A = 1.9$ and 2.5 , the fusion power $P_{fusion} \approx 550\text{MW}$ and the net electric power $P_{net} = 90\text{-}100\text{MW}$.

Figure 45 plots several dimensionless parameters for the aspect ratio and shielding thickness scans. Figure 45a shows that the required H_{98} is very nearly independent of shield thickness except for the lowest- A and thickest shields cases. For all cases, the H_{98} required to operate fully non-inductively and at the no-wall limit is well above 1, i.e. $H_{98} \approx 1.75\text{-}1.8$ for $A \leq 2$ and decreases to ≈ 1.55 at $A=4$. Interestingly, using a confinement scaling by Petty [59] for which turbulent transport is assumed to be dominated by electrostatic turbulence and therefore having no/weak β degradation [200] (unlike the ITER ELMy H-mode scaling which varies as $\sim \beta^{-0.9}$), there is a more substantial variation in the required $H_{Petty-08}$ as a function of shield thickness. Overall, the required $H_{Petty-08}$ values are systematically lower than the required H_{98} values, and for the reference $\Delta_{sh-eff} = 60\text{cm}$ configuration $H_{Petty-08} \approx 1.3$ nearly independent of aspect ratio. As discussed in Section 2.1.4, the scaling of confinement with dimensionless parameters remains an important research topic for tokamaks of all aspect ratios. Figure 45b shows that the bootstrap fraction f_{BS} is between 70-81% for nearly all scenarios treated and weakly dependent on aspect ratio. Figure 45c shows $\beta_T \approx 3.5\%$ at $A=4$, 7-10% at $A=2$, and 10-20% at $A=1.6$ depending on shield thickness. Lastly, Figure 45d shows that $q^* > 3$ for all cases studied with the highest values $q^* \geq 4$ occurring between $A=1.8$ and 2.25 even for the thickest shielding cases.

As discussed in Section 2.4.3, non-solenoidal plasma current formation and ramp-up are significant challenges for ST-based FNSF and Pilot Plant devices. An important question is what is the minimum aspect ratio for possible inclusion of a central solenoid for current formation and ramp-up. Figure 46a shows the steady-state plasma current varies strongly with aspect ratio and approximately as $I_P \propto A^{-1}$ except for the lowest- A and thicker shield cases. The required currents at the lowest $A=1.6$ and thinnest shield are also relatively high = 15-18MA and exceed ITER levels. As the aspect ratio is increased, there is increasing space for a ohmic heating (OH) / central solenoid coil for plasma initiation and possibly ramp-up to the steady-state plasma current value. For the aspect ratio scans treated here, the TF winding pack thickness is held constant

at 24cm, and TF external structure thickness is held constant at 20cm from $A=1.6$ to 2, and is increased approximately linearly with A to 45cm at $A=4$. This aspect ratio dependence is chosen to keep the overall inboard midplane TF magnet tensile stress $\lesssim 0.5$ - 0.55 GPa. The remaining space inboard of the TF magnet structure is allocated to a central solenoid with HTS conductor current density of 70 MA/m^2 and sized to have a maximum internal vertical field of 20T. The OH flux swing can be related to the plasma current via an Ejima-Wesley coefficient $C_{E-W}(A)$ as $\Delta\Psi_{OH} = C_{E-W}(A)\mu_0 R_0 I_P$ where $C_{E-W}(A) = 0.18 \times A$ is linear in aspect ratio [201] but has a reduced coefficient (0.18 vs. 0.4) consistent with auxiliary-heated H-mode ramp-up as observed in NSTX [27]. Figure 46b shows that substantial ($> 50\%$) single-swing current ramp-up can be achieved for the thinnest shield case for $A \geq 2$ but this fraction is only achievable for $A \geq 3$ for the thickest shield case. If instead one considers only the minimum current value $\approx 2\text{MA}$ needed to efficiently absorb NNBI (see Section 2.4.3), and if double-swing OH could be used (with a long solenoid current ramp-down to minimize negative loop voltage), then Figure 46c shows that $A \geq 2$ is required for the reference $\Delta_{sh-eff} = 60\text{cm}$ configuration.

In terms of wall loading and power handling, Figure 47a shows the ratio of the total heating power P_{heat} (NBI + alpha heating) normalized to the plasma surface area S , and this value is near 1MW/m^2 and nearly independent of aspect ratio for the thinnest shield cases. For the thicker shield cases P_{heat}/S is highest for $A > 2.5$. Figure 47b shows that the surface-average neutron wall loading is maximized for $A=1.8$ to 2.5 for thinner shields but is maximized between $A=2.5$ to 2.75 for thicker shield cases with the average wall loading at $A=2.5$ approximately 30% higher than for $A=2$ for the reference $\Delta_{sh-eff} = 60\text{cm}$ configuration. Projecting the cost of future FNSF / Pilot Plant devices is extremely challenging, but it is possible to compare relative masses or (assuming similar component mass densities) compare estimated volumes of core fusion components. Two of the more complex and/or costly objects in the fusion core are likely to be the toroidal field magnets and the blanket modules. The achievable Q_{eng} is a useful metric for overall device performance. At fixed heating power $Q_{eng} \propto Q_{DT} \propto P_{fusion}$. Figure 47c shows that the fusion power normalized to the blanket volume has a maximum value near $A=3$ for all shielding cases considered, and is nearly independent of A for $A \geq 2.5$. For the reference $\Delta_{sh-eff} = 60\text{cm}$ configuration, $A=2$ is found to require 60-70% more blanket volume than $A=2.5$ or 3 at similar Q_{eng} . On the other hand, Figure 47d shows that $A=1.6$ to 2 maximizes the fusion power per unit TF coil volume for all shielding thicknesses, and lower- A would also obviously minimize OH coil volume. Thus, lower- A would likely minimize core TF and CS magnet cost while higher- A would likely minimize blanket cost for otherwise similar overall fusion performance.

The results of Figure 47 imply that depending on the mission emphasis (for example shorter-duration $Q_{eng} > 1$ demonstration versus high neutron fluence goal) different

aspect ratios may be optimal. Figure 48 shows this fluence and HTS TF magnet lifetime trade-off versus shielding thickness. In this figure, the peak inboard/outboard neutron fluxes are taken to be 1.4/1.9 times the surface-average fluxes, respectively. Note that in this figure the HTS magnet lifetime decreases faster with decreasing shield thickness than the fluence because the fusion power and wall loading increase as the shielding thickness decreases. These results imply that at fusion power levels of $\sim 500\text{MW}$ the magnet lifetime would be reduced to a few full-power weeks to months for 30 to 40cm of equivalent WC shield thickness, respectively.

5.3. Preliminary Concept for an $A=2$ HTS-TF FNSF / Pilot Plant

The high current density and high toroidal field potentially possible with HTS magnets combined with reduced aspect ratio to maximize the effectiveness of long-leg/Super-X divertors in mitigating high heat fluxes while retaining TBR near 1 opens the possibility of all superconducting FNSF / Pilot Plants at $R_0 = 3\text{m}$ with $A \leq 2$. For $A=2$, a relatively high $H_{98} \approx 1.8$ ($H_{Petty-08} = 1.1-1.35$) is required to reach the no-wall limit as shown in Figure 45. Figure 49a shows that this requirement can be relaxed by increasing the NBI heating power and reducing Q_{eng} from 1.4 to 1 for the reference $\Delta_{sh-eff} = 60\text{cm}$ configuration. As seen in the figure, increasing P_{NBI} to 100MW reduces the required H_{98} to 1.4 (values already achieved on NSTX) and the required $H_{Petty-08}$ is reduced to 1. Figure 49b shows that for these reduced $Q_{eng} = 1$ scenarios the β_N is at or below 4 and the average neutron wall loading could be as high as 1.7 MW/m^2 (3.2 MW/m^2 outboard-peak) for 100MW of NBI heating power.

In the interest of scoping this low- A configuration while also retaining a small solenoid for plasma start-up, an $A=2$ FNSF / Pilot Plant concept is considered with 60cm effective inboard shielding thickness, $B_T = 4.1\text{T}$, $\kappa_x = 2.5$, $\beta_N = 4.2$, $P_{NBI} = 50\text{MW}$, and $P_{fusion} = 560\text{MW}$, i.e. parameters all consistent with the results shown in Figures 43-49. Building on the configuration ideas developed for the Cu-TF ST-FNSF and also previous low- A SC DEMO reactor designs [202, 203, 182] but incorporating long-leg outboard divertors and a vertical maintenance strategy, Figure 50 shows sectional views of an $R_0 = 3\text{m}$, $A=2$ HTS-TF FNSF / Pilot Plant concept. Figure 50 shows that it is possible to have a configuration that incorporates [154]:

1. Continuous HTS TF coils with no joints
2. All equilibrium PF coils are superconducting and outside the TF (and therefore just as well shielded as the TF magnet)
3. Inboard divertor PF coils to support equilibria with $\kappa_x = 2.5$ and $\delta_x = 0.5$
4. Top/bottom PF coils to support a long-leg/Super-X divertor configuration
5. Space for a small HTS solenoid for plasma current initiation up to 2 MA

6. Integrated outboard blanket + shield + divertor modules

For this configuration the outboard blanket + shield + divertor modules are toroidally segmented and compatible with a vertical maintenance strategy where modules are removed through ports between the TF coils. To keep most of the cold mass at cryogenic temperatures during maintenance, the upper/top two PF coils are located in a separate cryo-stat that is removed with the larger upper cryostat lid during vertical maintenance activities. Finally, using the same power exhaust scaling assumptions as in Section 2.3 and Figures 16a-b, Figure 51 shows that it is possible to have peak divertor heat-fluxes below $10\text{MW}/\text{m}^2$ with the strike-point on either the upper or lower target plate in the divertor slot. Divertor scenarios with the strike-point as shown in Figure 51b combined with upstream pumping could be favorable for stable full detachment [136]. For both configurations all equilibrium PF coils have SC winding pack current densities below $40\text{MA}/\text{m}^2$. These results show that if TF and OH HTS winding pack current densities $\geq 70\text{MA}/\text{m}^2$ and peak fields up to 20T could be achieved, and non-inductive current ramp-up reliably demonstrated in near-term ST experiments, an $R_0 = 3\text{m}$, $A=2$ superconducting FNSF / Pilot Plant capable of $6\text{MWy}/\text{m}^2$ (peak), $Q_{eng} > 1$, $\text{TBR} \approx 1$, and having significantly reduced TF magnet volume may be feasible.

6. Summary

A Fusion Nuclear Science Facility (FNSF) could play an important role in the development of fusion energy by providing the nuclear environment needed to develop fusion materials and components. For the first time, copper-TF ST-based FNSF configurations have been developed simultaneously incorporating several important features including: (1) a blanket system capable of tritium breeding ratio $\text{TBR} \approx 1$, (2) a poloidal field coil set supporting high elongation and triangularity for a range of internal inductance and normalized beta values, (3) a long-legged/Super-X divertor which substantially reduces projected peak divertor heat-flux and has all outboard poloidal field coils outside the vacuum chamber and as superconducting to reduce power consumption, and (4) a vertical maintenance scheme in which blanket structures and the centerstack can be removed independently. Negative neutral beam injection (NNBI) heating and current drive is calculated to effectively support full non-inductive operation including non-inductive current overdrive ramp-up starting from initial plasma current levels as low as 2MA. The NNBI blanket penetrations do reduce the TBR, but if NBI power fluxes as high as $50\text{MW}/\text{m}^2$ through blanket apertures can be supported, 80MW of NNBI heat would reduce the TBR in a $R_0 = 1.7\text{m}$ device by only 3%. Tangential injection and breeding at the back of the blanket are both computed to help reduce the impact of the NBI penetrations on TBR.

A long-leg divertor also plays a very important role by moving the divertor strike-point to radii locally outboard of the conformal blanket modules. This location not only provides some shielding of the divertor target from neutron fluxes, but also frees the inboard top and bottom regions of the device for tritium breeding. For example, for a $R_0 = 1.7\text{m}$ ST-FNSF device, the top/bottom breeding can increase the total TBR by at least 7%. Overall, at $A=1.7$, the plasma geometric major radius threshold for tritium self-sufficiency in a Cu-TF ST-FNSF is found to be approximately 1.7m. A smaller $R_0=1\text{m}$ ST-FNSF device has $\text{TBR} \approx 0.9$ which is below unity but substantially reduces T consumption relative to not breeding. For a $R_0=1\text{m}$ device it would be necessary to purchase approximately 0.4-0.55kg of T/FPY from outside sources at a cost of \$30-200k/g of T implying a total cost of \$12-110M per full-power year. Shielding calculations indicate that the vacuum vessel, TF coils, outboard PF coils, and most or all of the divertor PF coils can be lifetime components for both Cu-TF ST-FNSF devices, i.e. could support the neutron fluence mission of $6\text{MWy}/\text{m}^2$. For the smaller Cu-TF ST-FNSF devices, more of the divertor coils must be normally conducting due to nuclear heating and damage issues.

Building on the TF and PF coil layouts found to be optimal for the Cu-TF ST-FNSF configuration, net-electricity producing Pilot Plants utilizing HTS TF magnets have been systematically studied as a function of aspect ratio and inboard shielding thickness. To achieve peak outboard neutron fluence $> 6\text{MWy}/\text{m}^2$ for the FNSF mission, approximately 60cm of inboard WC-equivalent shield is needed to reduce radiation damage to the HTS TF magnets to acceptable levels. For shields in this thickness range, $R_0 = 3\text{m}$ is a favorable plasma major radius size for achieving $Q_{eng} > 1$ for a wide range of aspect ratios and shielding thicknesses. Lower aspect ratios with $A=1.6$ to 2 are found to maximize the fusion power per unit TF (and OH) coil volume for all shielding thicknesses, while higher $A = 2.5-3$ would minimize blanket volume for otherwise similar overall fusion performance. As for the Cu-TF ST-FNSF, long-leg/Super-X divertor scenarios in low-A HTS-TF FNSF / Pilot Plants are found to substantially reduce peak divertor heat fluxes. For low-A devices to be attractive at the $R_0 = 3\text{m}$ scale, high HTS winding pack current densities $\geq 40-70\text{MA}/\text{m}^2$ and peak fields up to 18T are needed to provide space for shielding, but if such magnets could be fabricated, an $R_0 = 3\text{m}$, $A=2$ all superconducting FNSF / Pilot Plant with poloidally continuous TF coils (no joints), all equilibrium PF coils outside the TF, and a small solenoid for current initiation would be feasible and could support fusion powers at the 500-600MW level. Such a device would be capable of $6\text{MWy}/\text{m}^2$ (peak), $Q_{eng} > 1$, $\text{TBR} \approx 1$ (assuming a thin inboard breeding blanket), and would have significantly reduced TF magnet volume (relative to conventional aspect ratio) which could help reduce overall magnet cost.

Acknowledgments

This work was supported primarily by the U.S. DOE Contract Number DE-AC02-09CH11466. CCFE authors were funded by the Research Councils UK Energy Programme grant number EP/I501045. The configuration development for the thin-shield $R_0=1.4\text{m}$ HTS ST Pilot Plant concept [154] was supported by Tokamak Energy, LTD (UK).

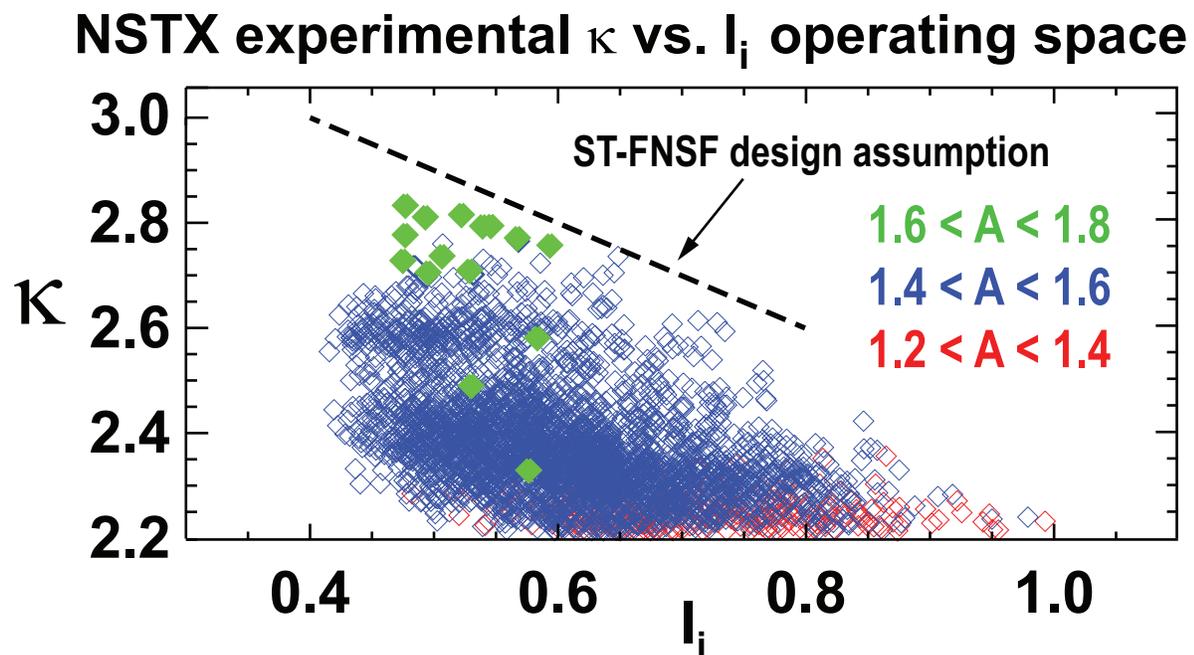


Figure 1. Achieved NSTX elongation κ vs. internal inductance l_i and design assumption for ST-FNSF (dashed line).

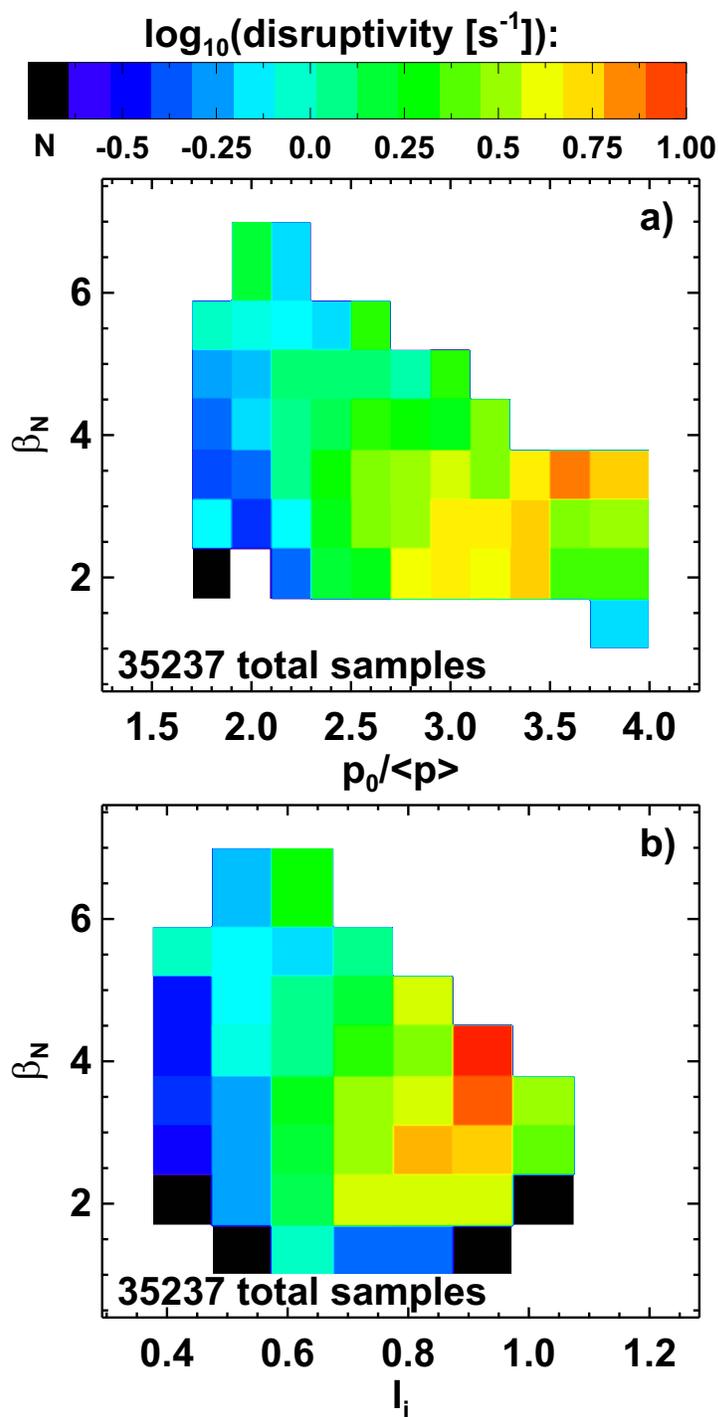


Figure 2. NSTX disruptivity versus β_N and (a) total pressure profile peaking and (b) internal inductance l_i . (Figure reproduced with permission [29])

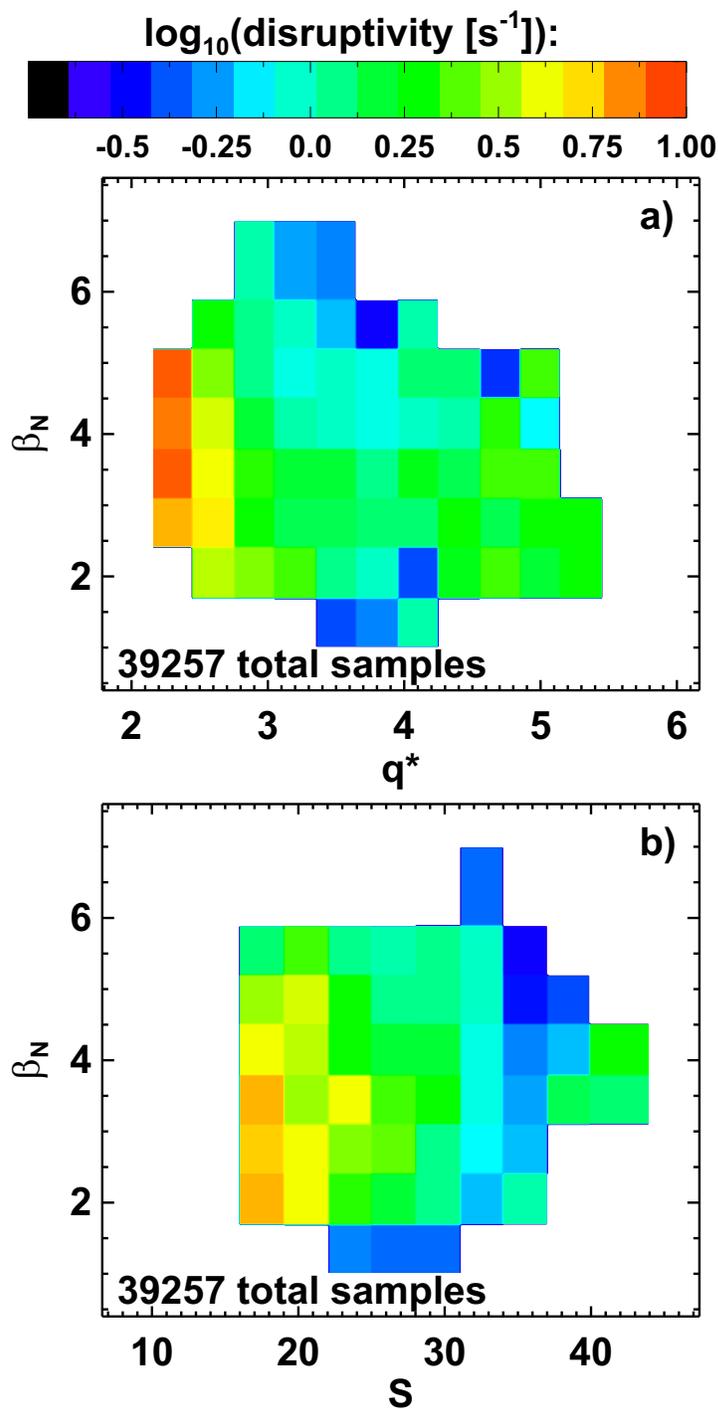


Figure 3. NSTX disruptivity versus β_N and (a) kink safety factor q^* and (b) shaping factor S . (Figure reproduced with permission [29])

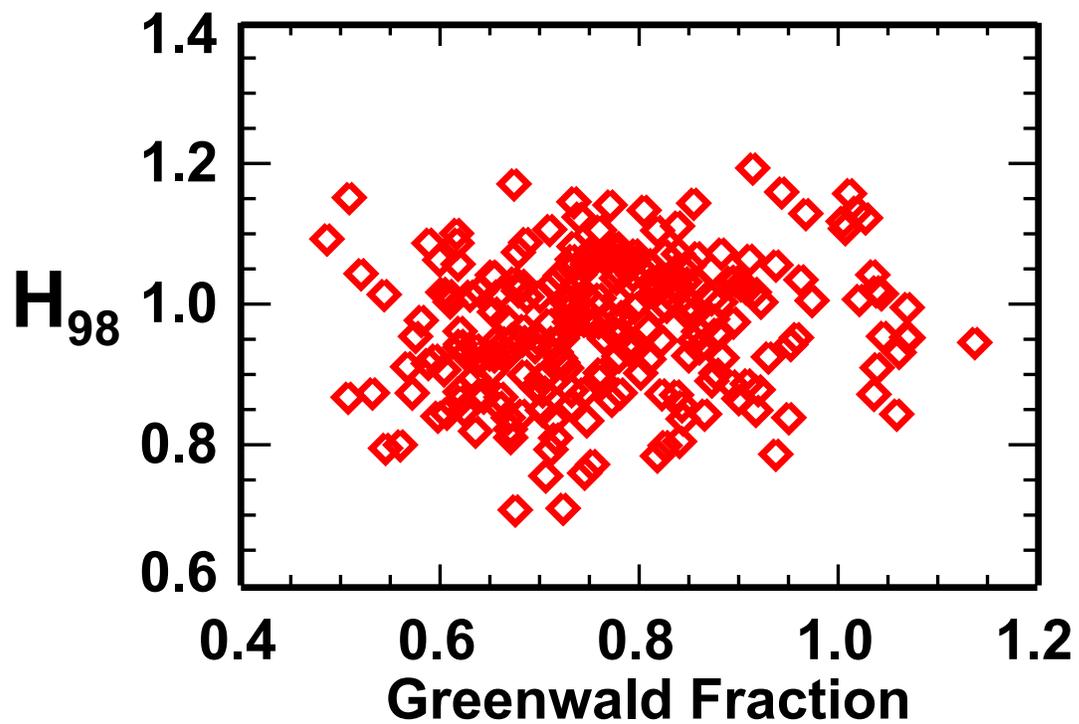


Figure 4. NSTX H-mode thermal confinement multiplier H_{98} relative to the ITER H-98($\gamma,2$) confinement scaling versus Greenwald density fraction. (Figure reproduced with permission [27])

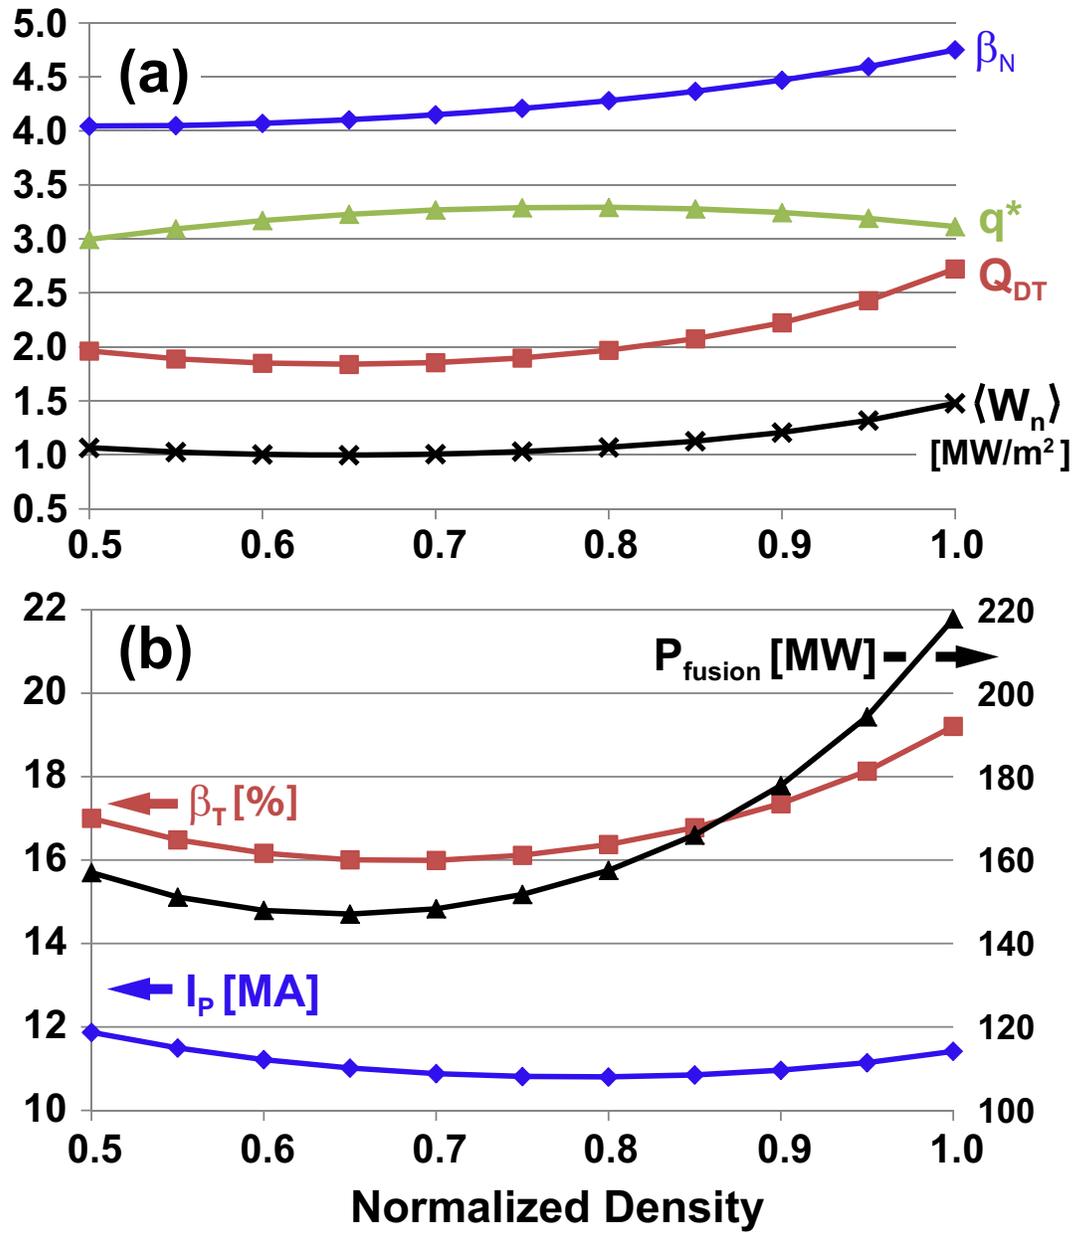


Figure 5. ST-FNSF parameters versus normalized density at fixed major radius $R_0=1.6\text{m}$ and NBI heating power $P_{NBI}=80\text{MW}$.

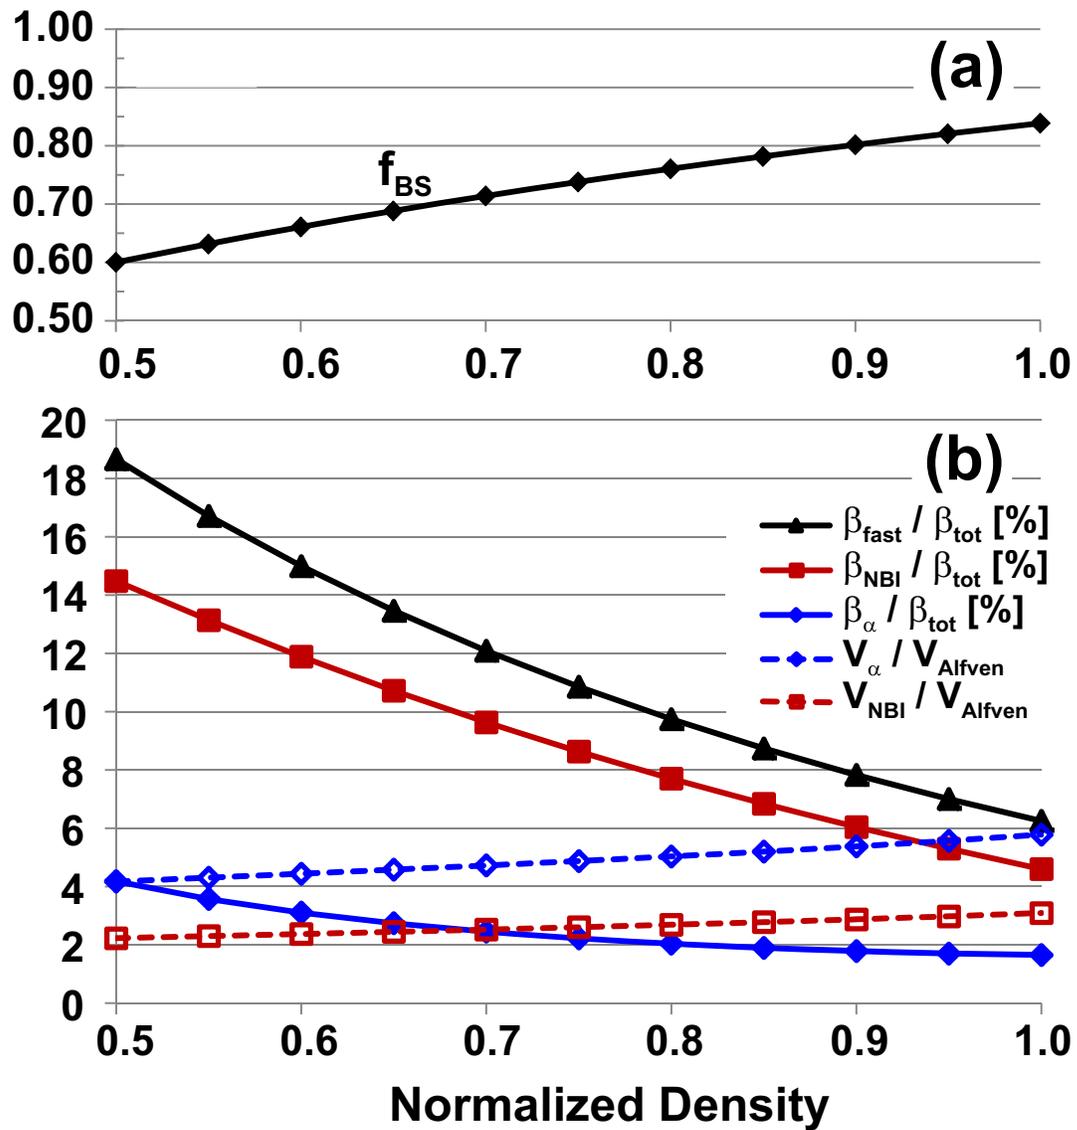


Figure 6. ST-FNSF (a) bootstrap current fraction and (b) fast-ion parameters versus normalized density at fixed major radius $R_0=1.6\text{m}$ and NBI heating power $P_{NBI}=80\text{MW}$.

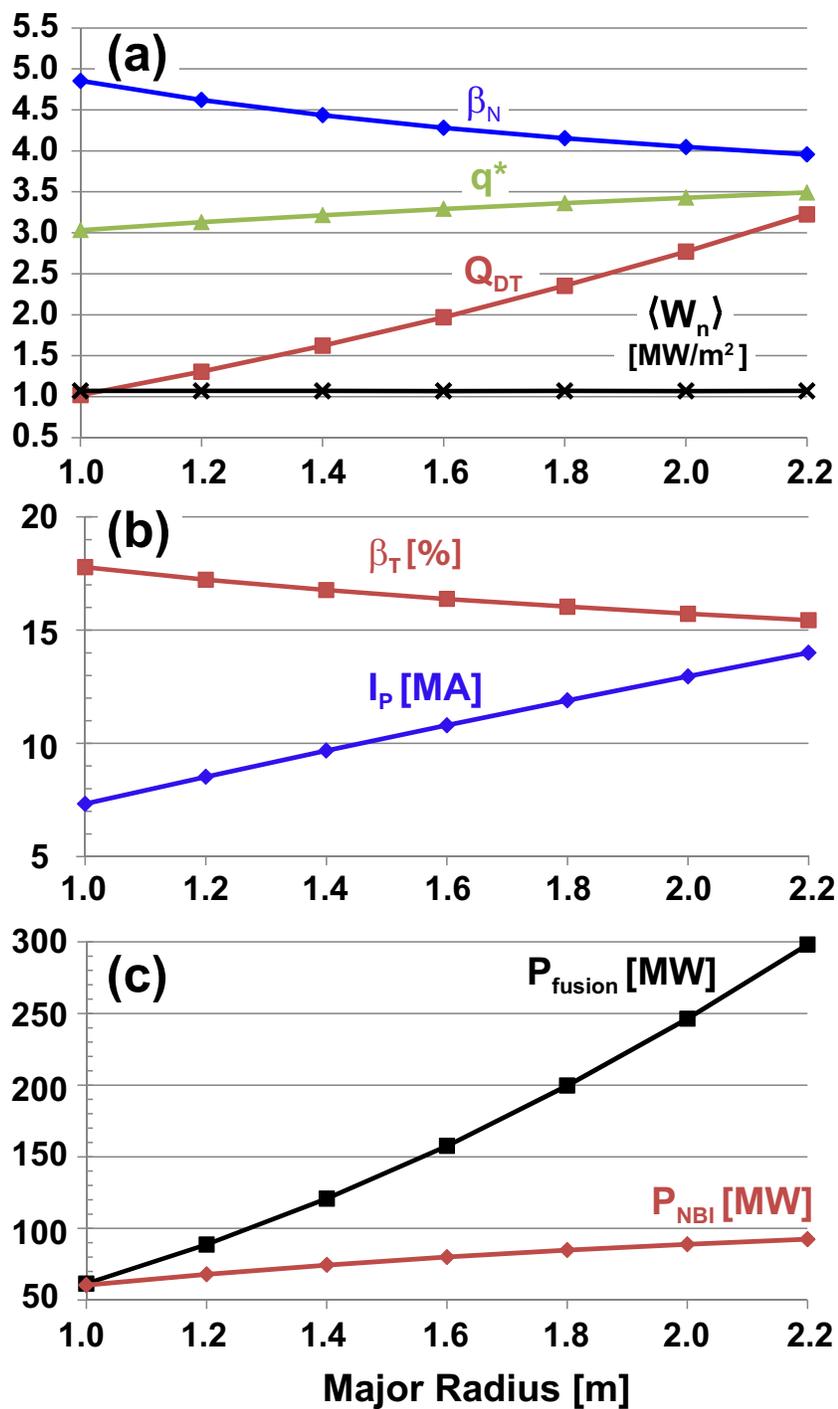


Figure 7. ST-FNSF parameters versus device major radius at fixed average neutron wall loading = 1 MW/m^2 .

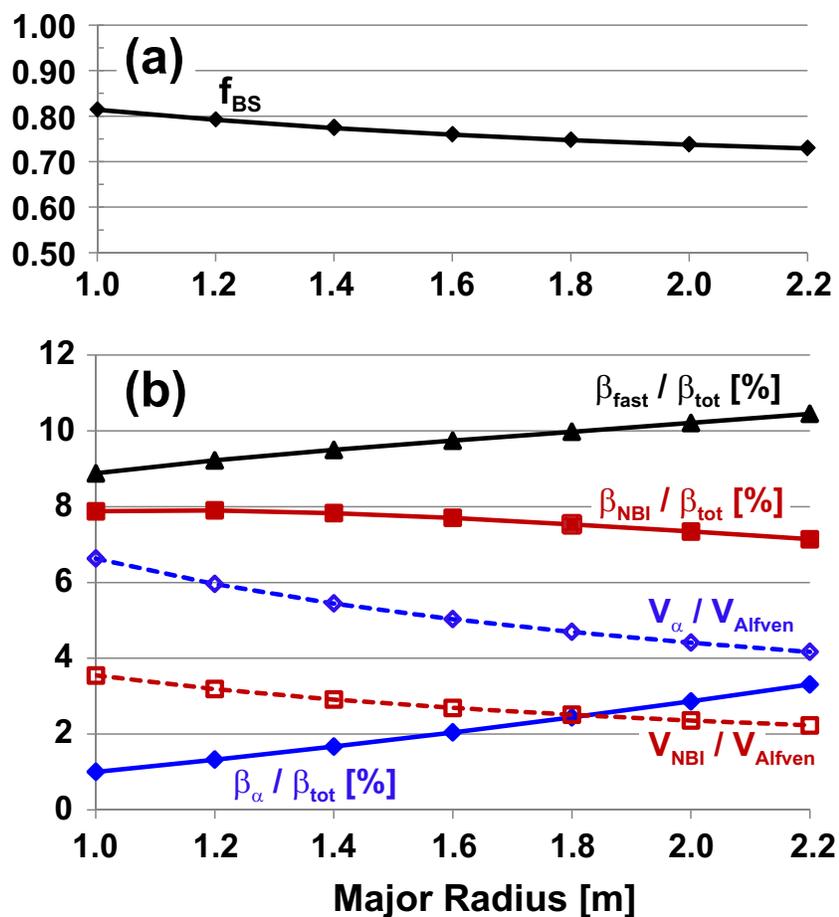


Figure 8. ST-FNSF (a) bootstrap current fraction and (b) fast-ion parameters versus device major radius at fixed average neutron wall loading = 1MW/m².

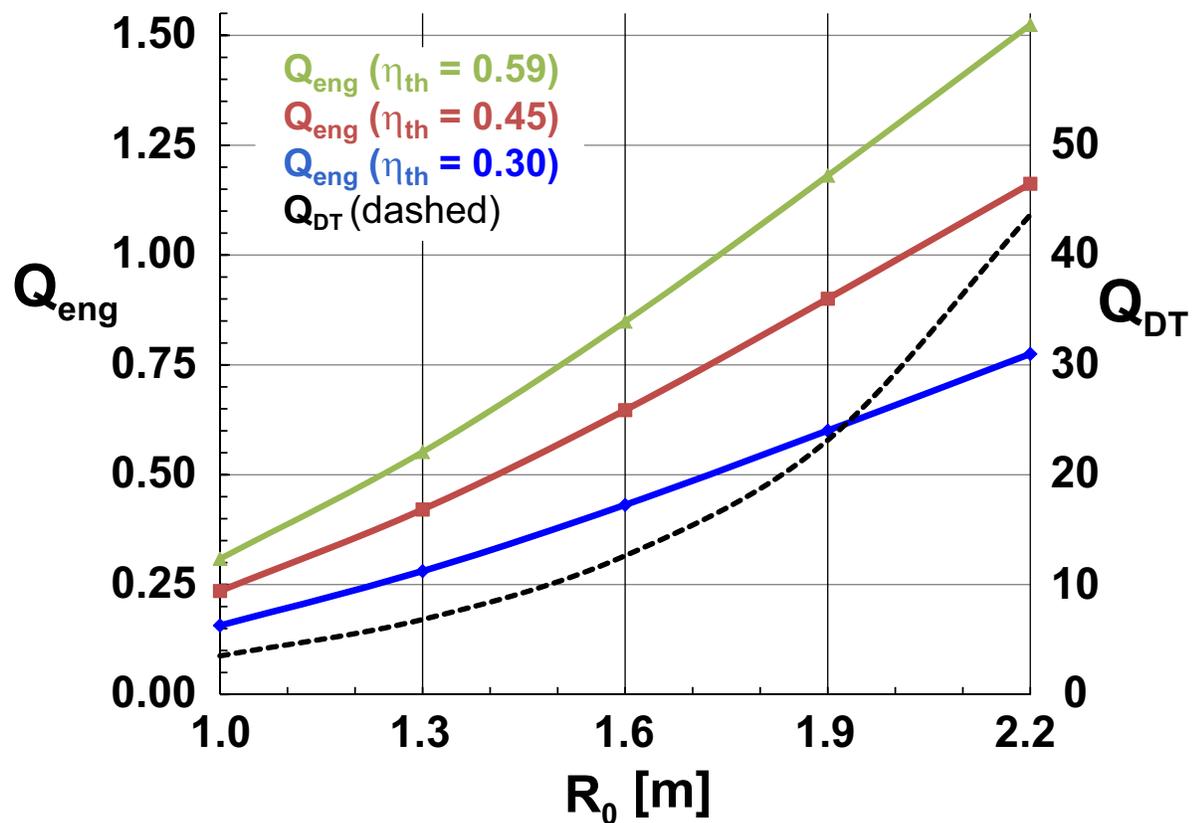


Figure 9. Engineering and fusion gain versus device size for high-performance ST-FNSF scenarios.

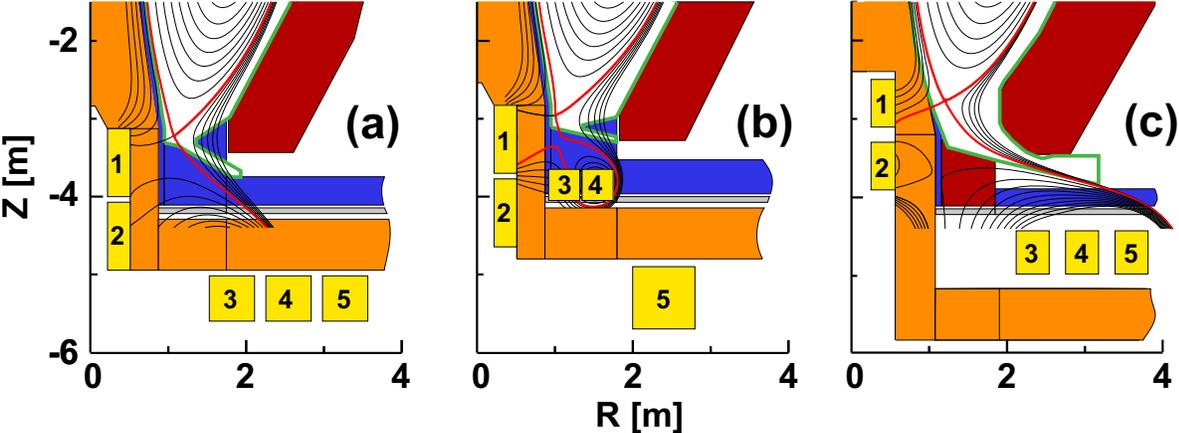


Figure 10. Divertor-region cross-sections for three $R_0=1.7\text{m}$ ST-FNSF divertor configurations: (a) conventional, (b) snowflake, and (c) super-X divertor.

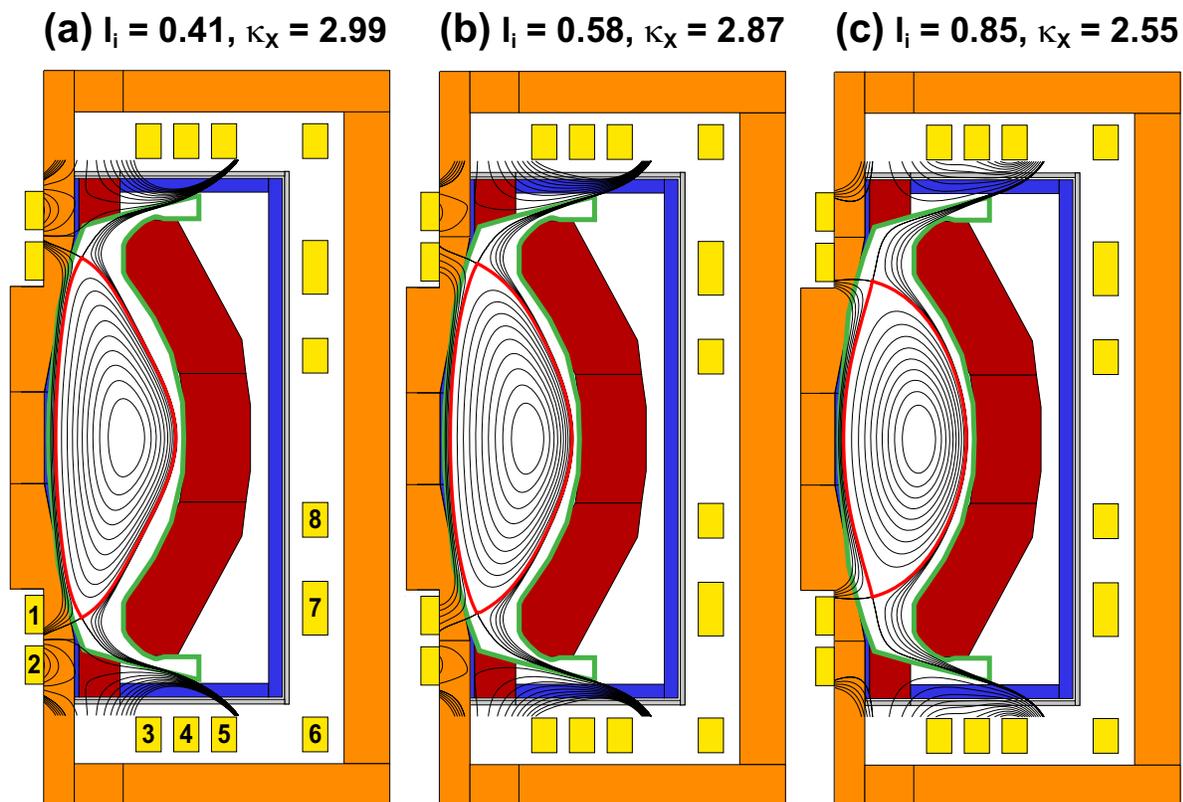


Figure 11. $R_0 = 1.7\text{m}$ FNSF device cross-sections for 3 equilibria with $\beta_N = 5$ and (a) low l_i and high κ , (b) intermediate/reference l_i and κ , and (c) high l_i and low κ .

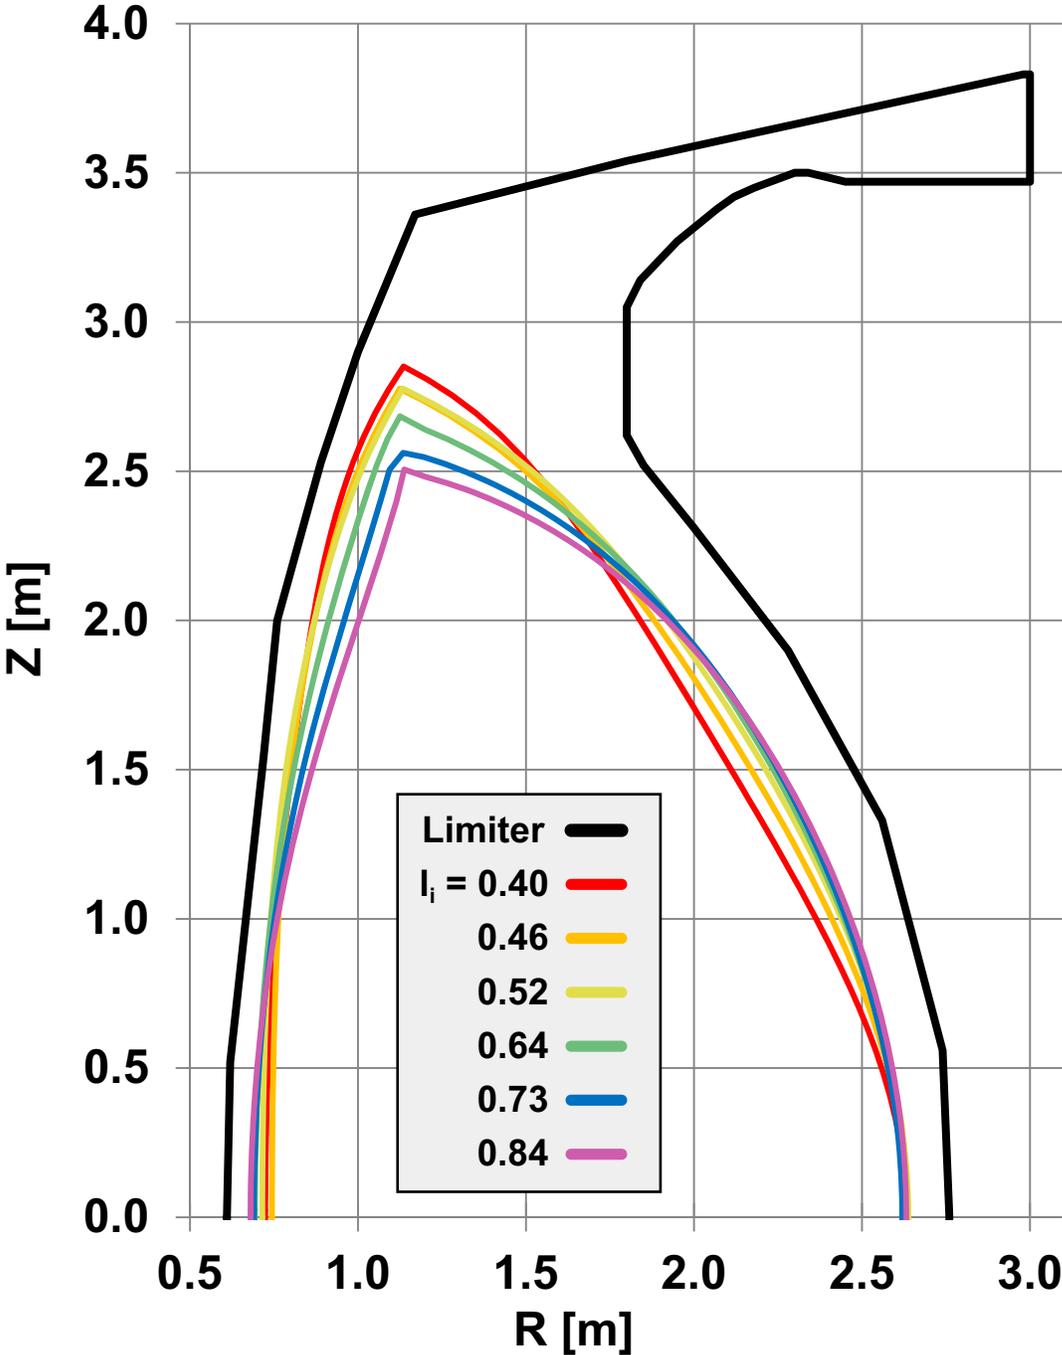


Figure 12. Overlay of limiter surface (black) and free-boundary $\beta_N=5$ equilibrium plasma boundaries for varied internal inductance l_i for $R_0=1.7\text{m}$ ST-FNSF.

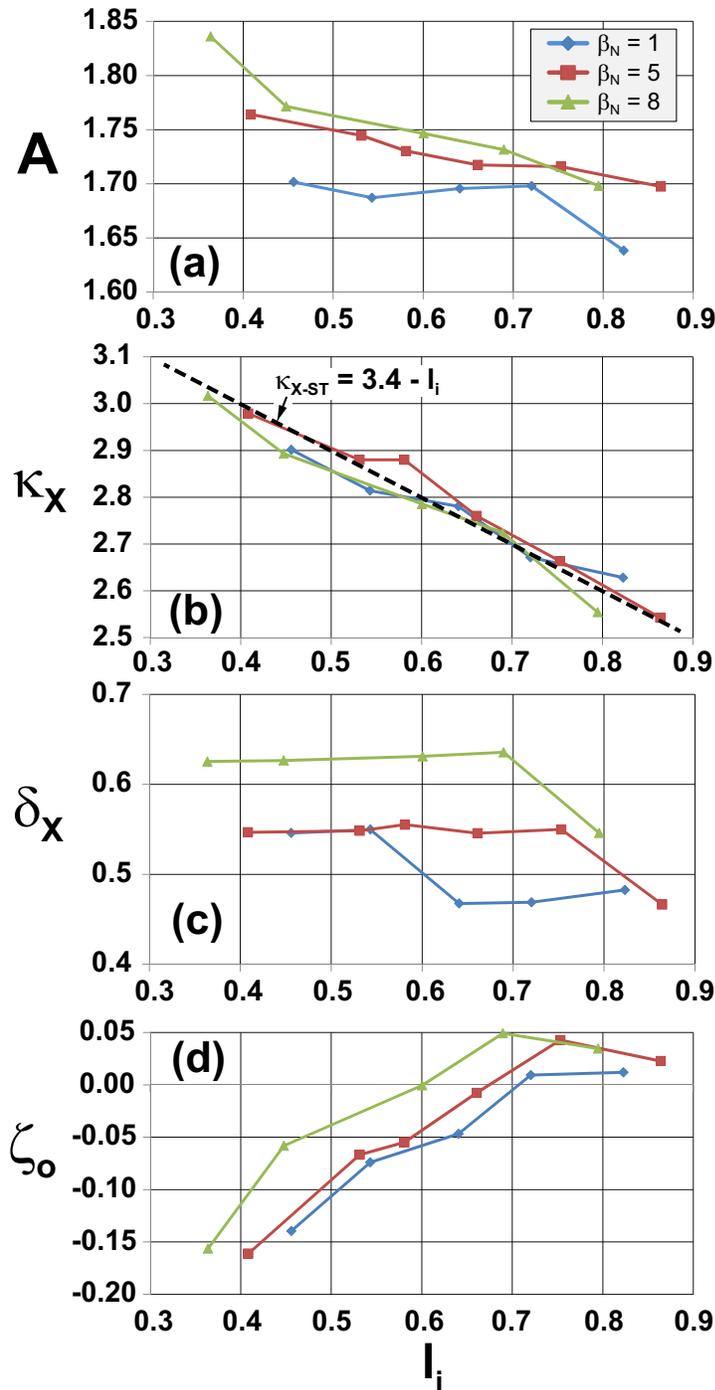


Figure 13. Plasma boundary (a) aspect ratio A , (b) x-point elongation κ_X , (c) x-point triangularity δ_X , and (d) outboard squareness ζ_o or a range of l_i and β_N for $R_0=1.7\text{m}$ ST-FNSF.

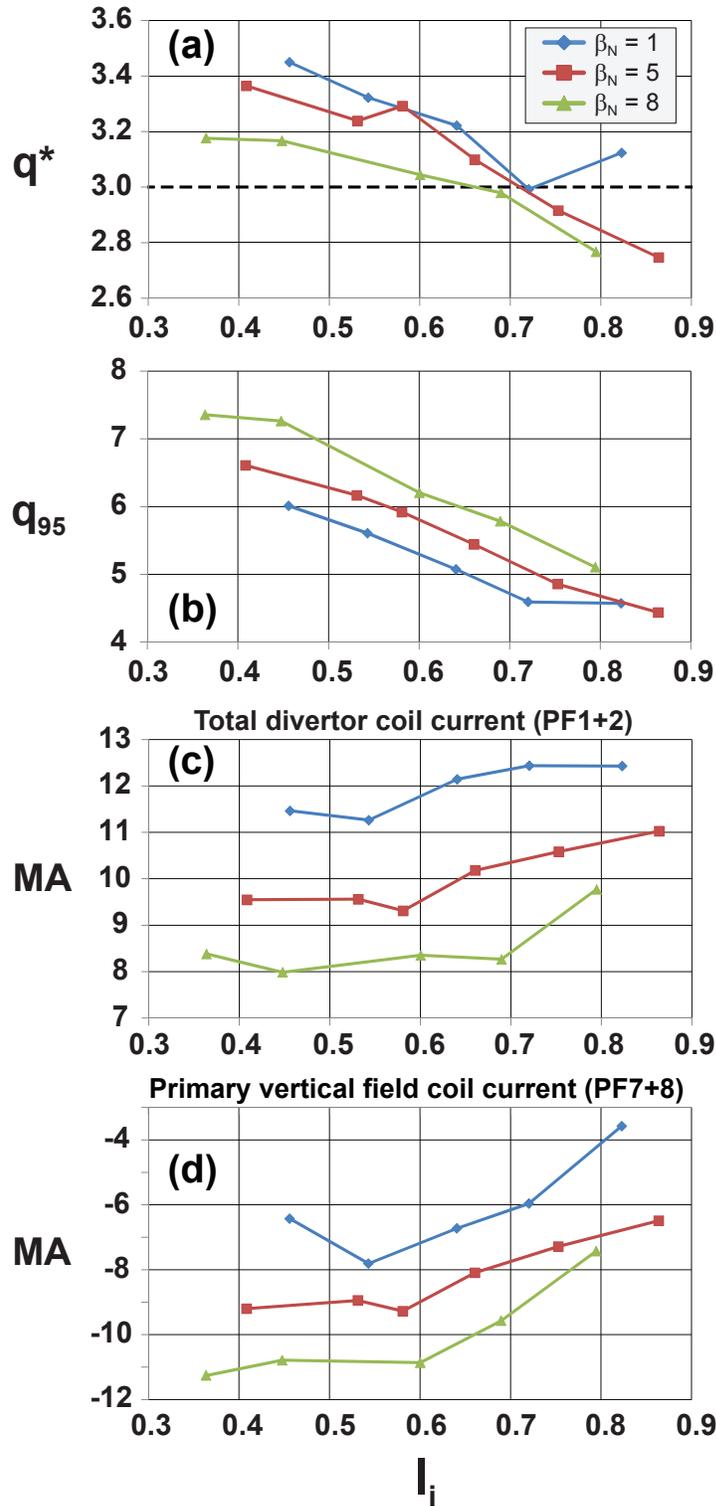


Figure 14. (a) Cylindrical safety factor q^* , (b) safety factor at 95% flux surface q_{95} , (c) total inboard divertor coil current, and (d) primary vertical field coil current for a range of I_i and β_N for $R_0=1.7\text{m}$ ST-FNSF.

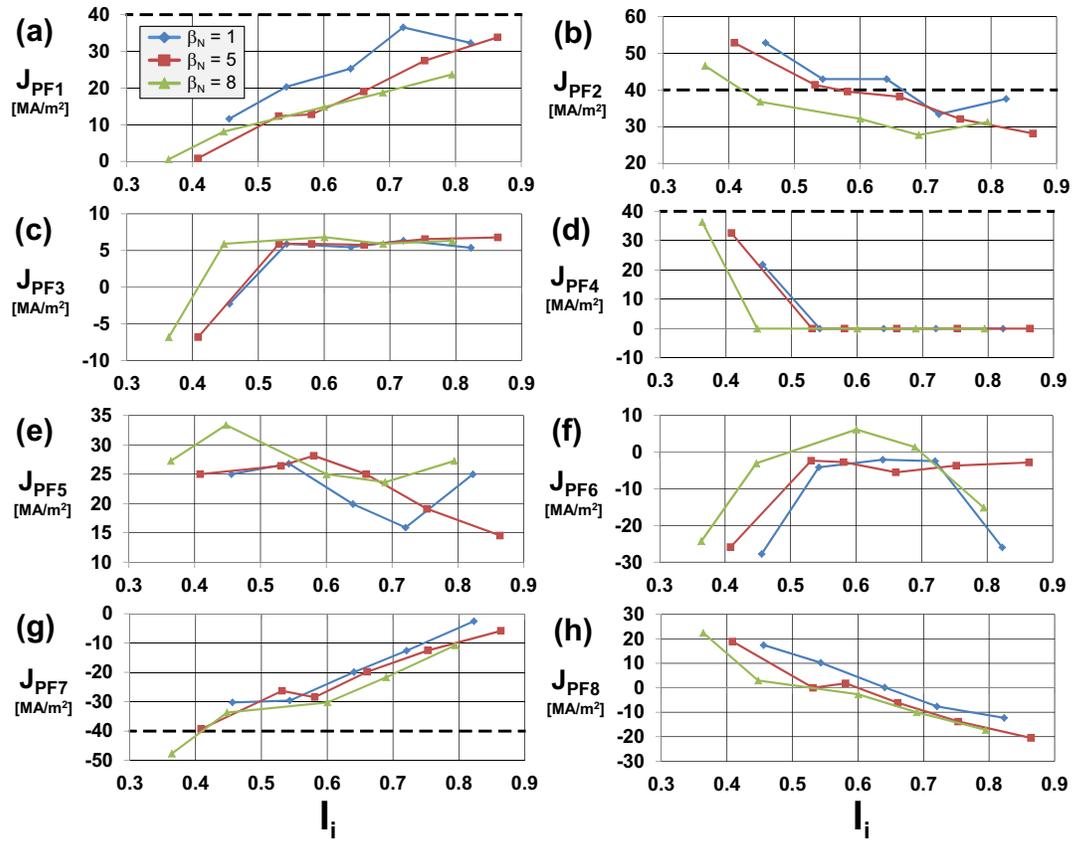


Figure 15. Poloidal field coil current densities J_{PF} for a range of l_i and β_N for $R_0=1.7$ m ST-FNSF.

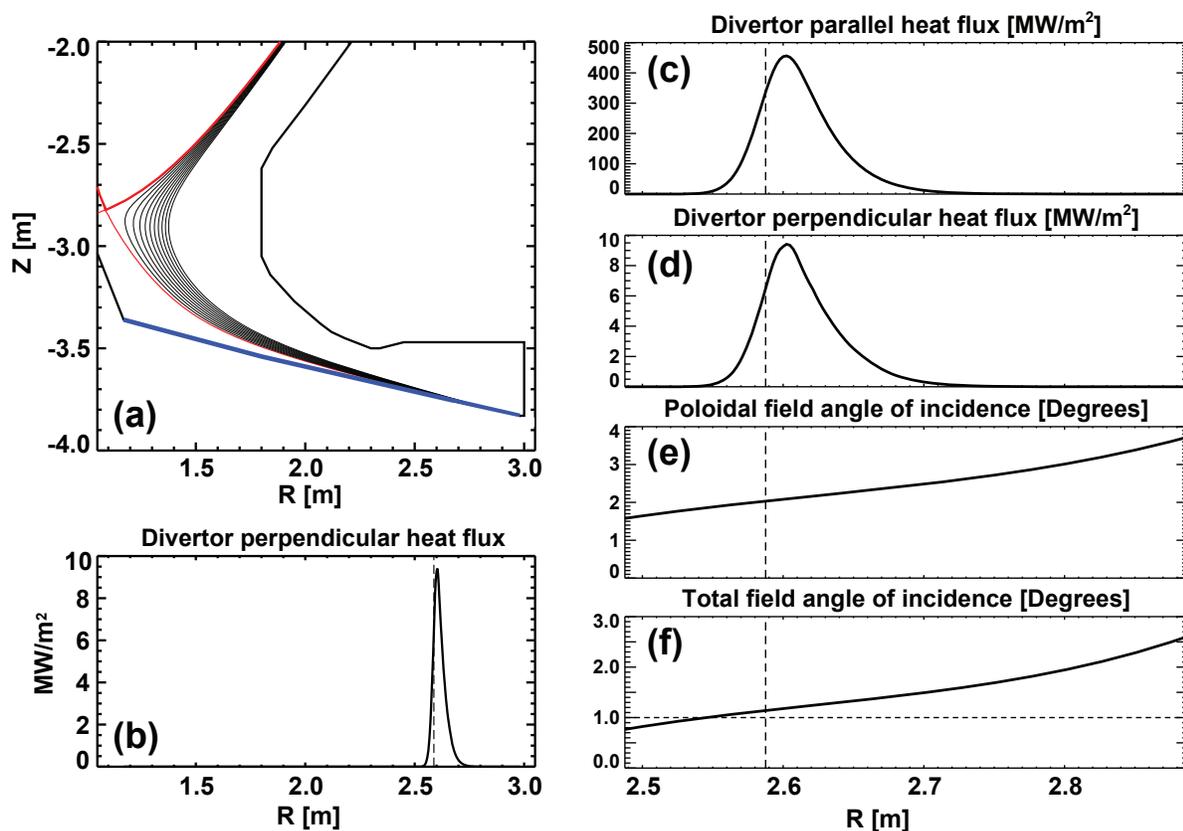


Figure 16. (a) Poloidal flux contours in the outboard horizontal divertor region with separatrix shown in red, target plate in blue, and limiter in black, and (b) perpendicular heat flux profile at target plate. Radial profiles near strike-point radius (vertical dashed line) of: (c) parallel heat flux, (d) perpendicular heat flux, (e) poloidal field angle of incidence, and (f) total magnetic field angle of incidence.

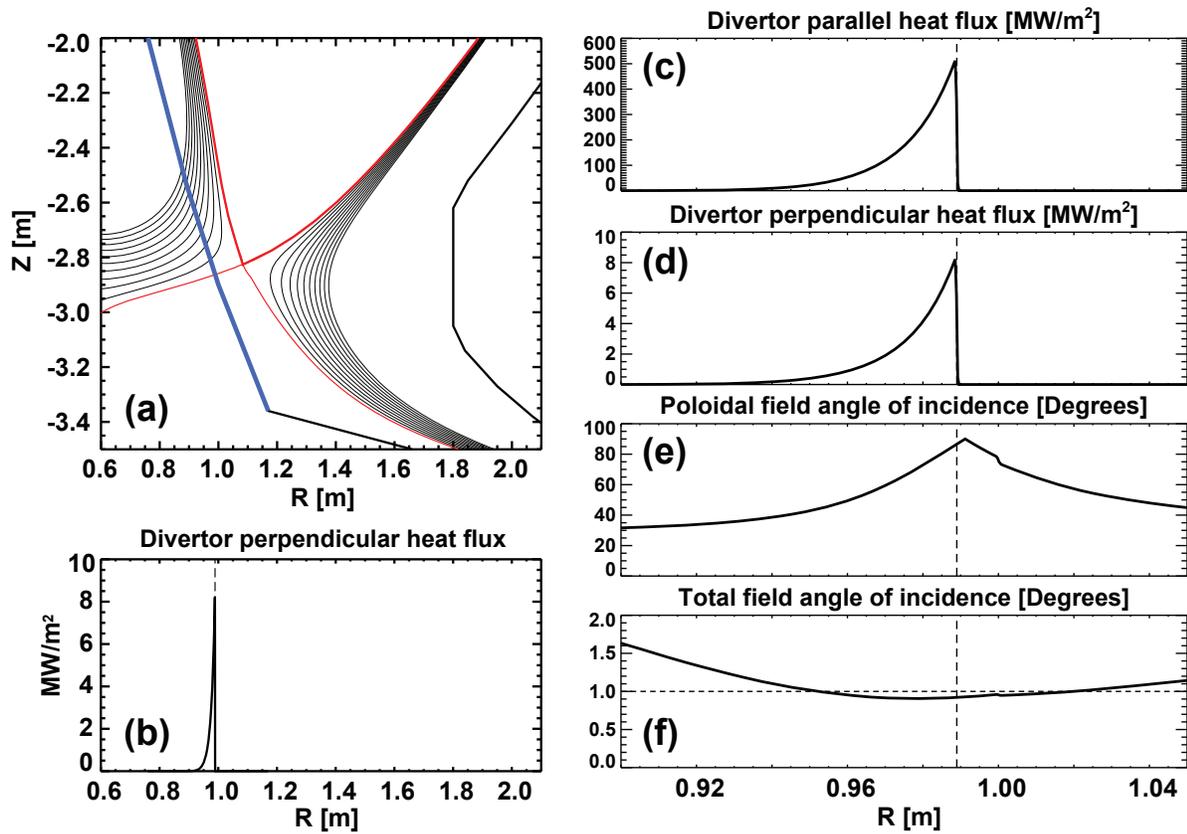


Figure 17. (a) Poloidal flux contours in the inboard vertical divertor region with separatrix shown in red, target plate in blue, and limiter in black, and (b) perpendicular heat flux profile at target plate. Radial profiles near strike-point radius (vertical dashed line) of: (c) parallel heat flux, (d) perpendicular heat flux, (e) poloidal field angle of incidence, and (f) total magnetic field angle of incidence.

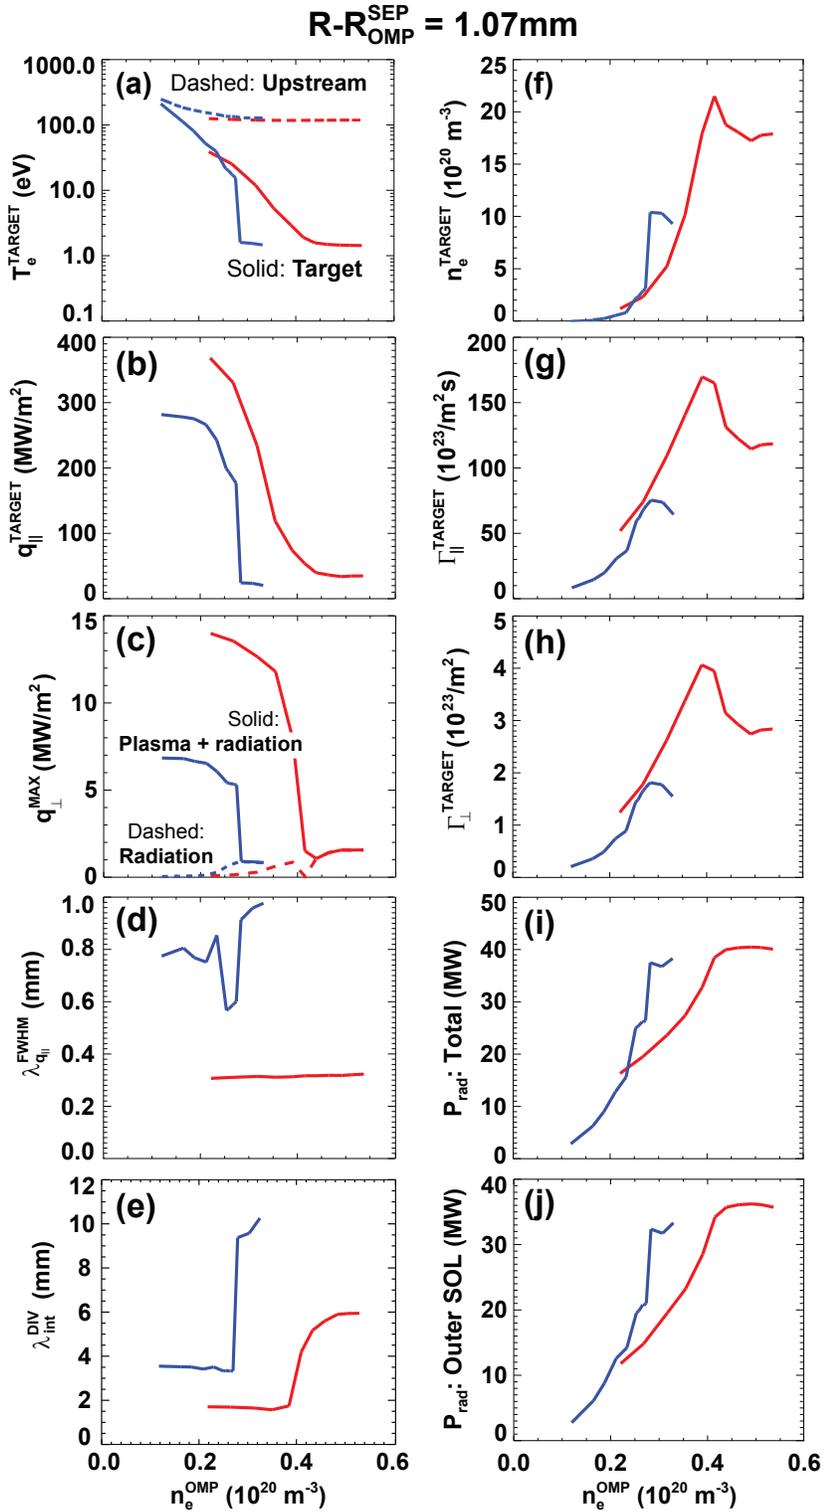


Figure 18. Results from SOLPS divertor power exhaust calculations for two different combinations of $D / \chi = 0.3 / 1.0 \text{ m}^2 \text{ s}^{-1}$ (blue) and $0.075 / 0.25 \text{ m}^2 \text{ s}^{-1}$ (red).

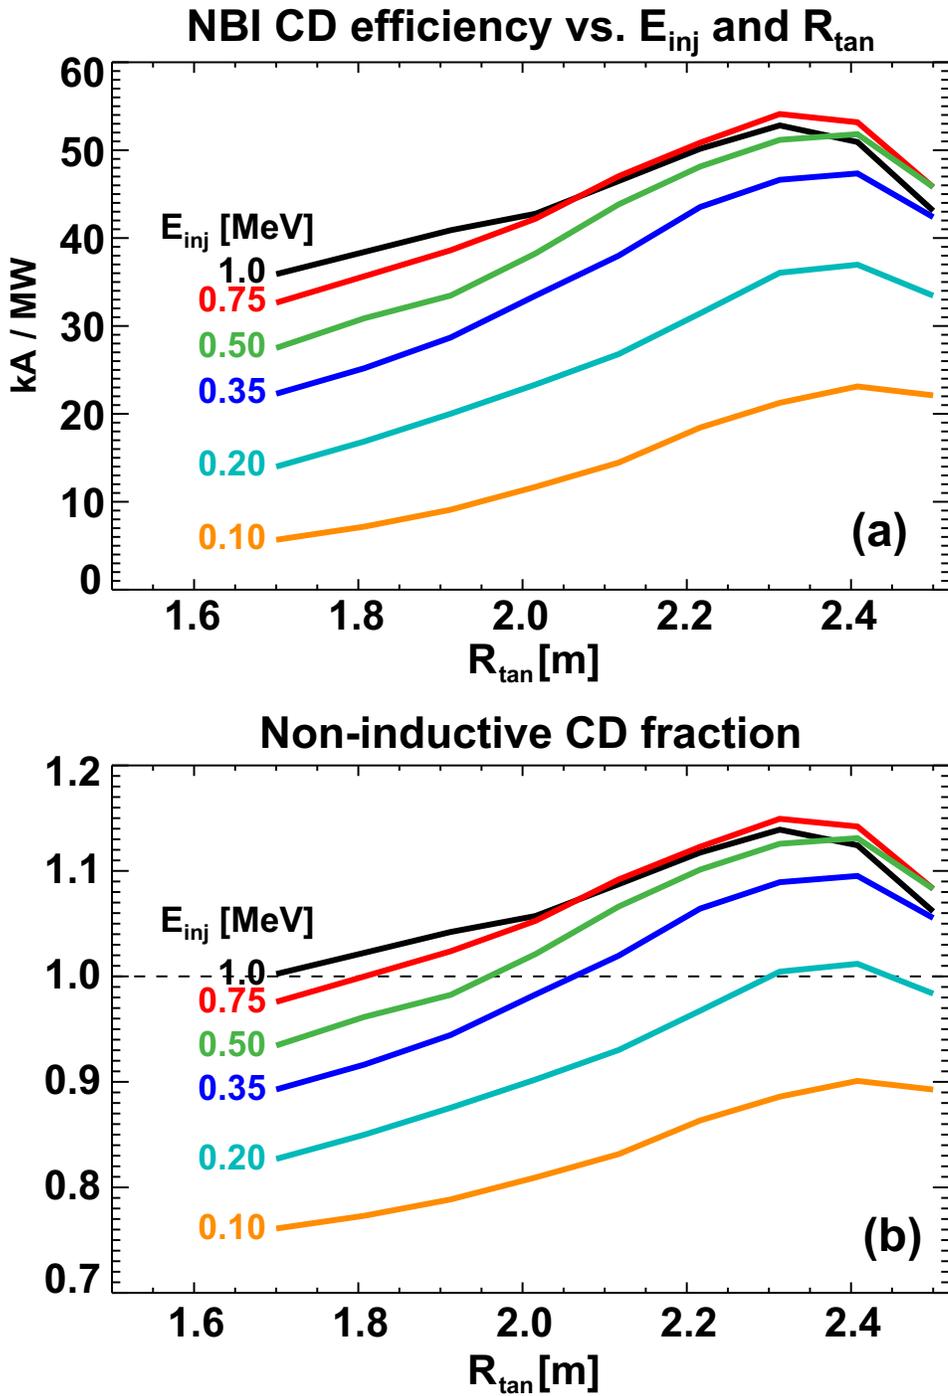


Figure 19. (a) Neutral beam current drive efficiency versus tangency radius of injection R_{tan} and injection energy E_{inj} for a D-D target plasma, and (b) non-inductive current drive fraction for a $I_P=7.5$ MA target plasma heated with 60MW of NNBI.

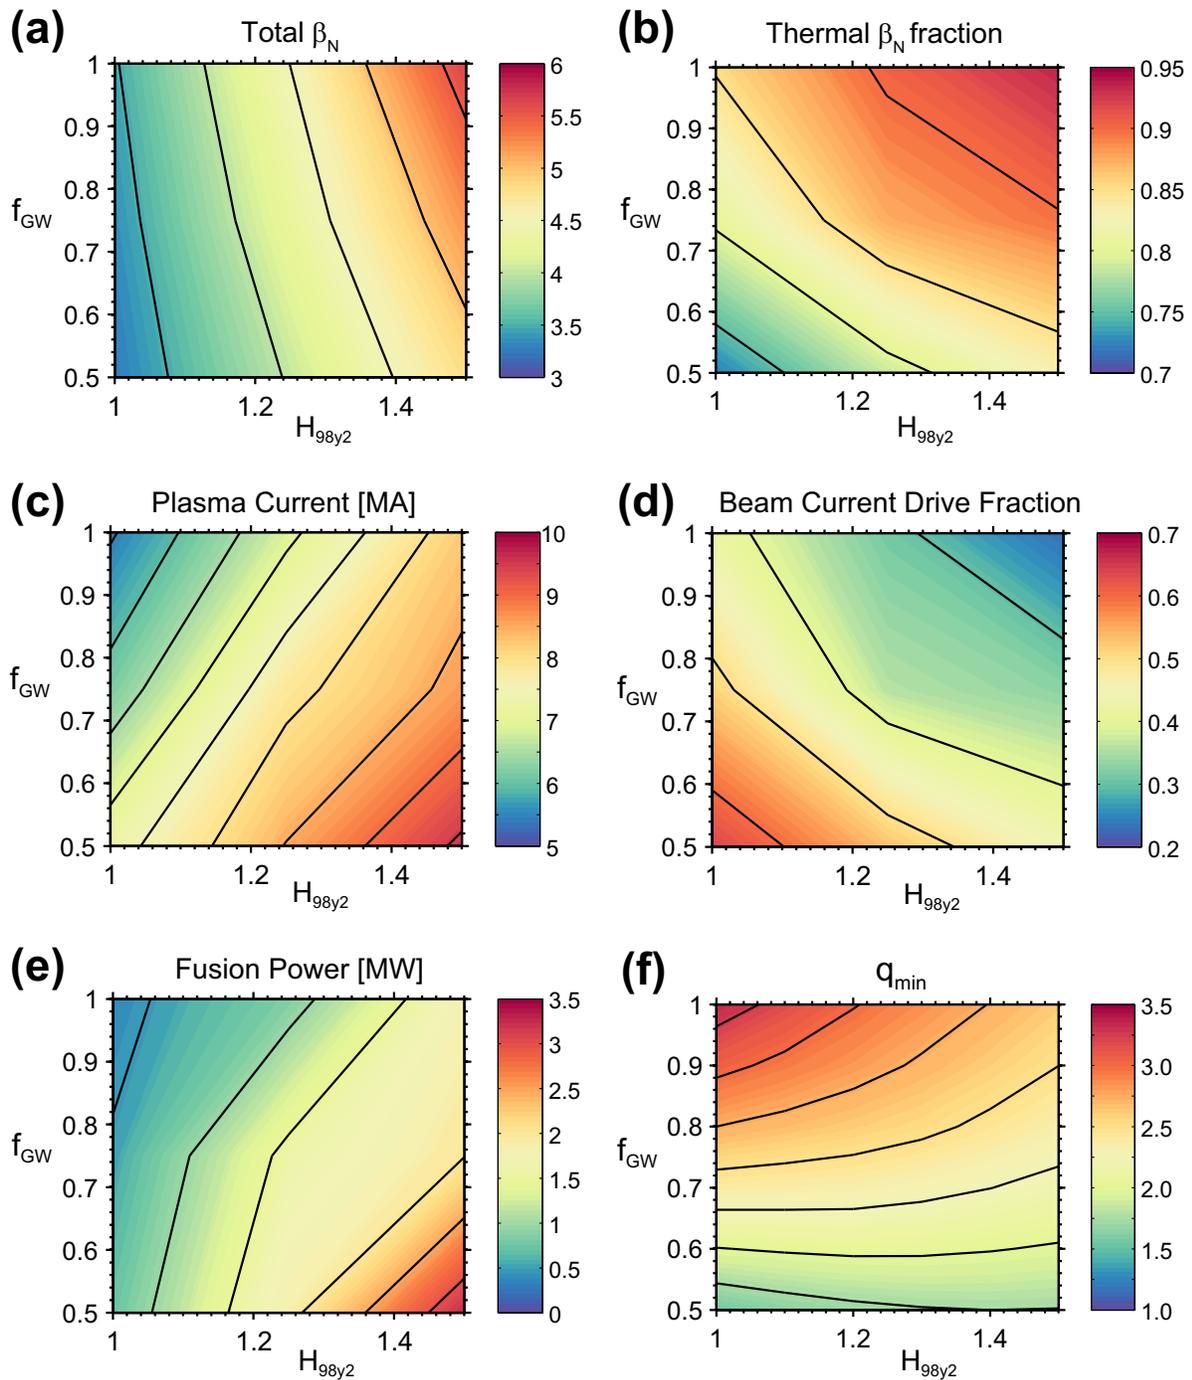


Figure 20. Plasma performance parameters computed by TRANSP as a function of confinement multiplier H_{98y2} and normalized density f_{GW} for D-D plasma.

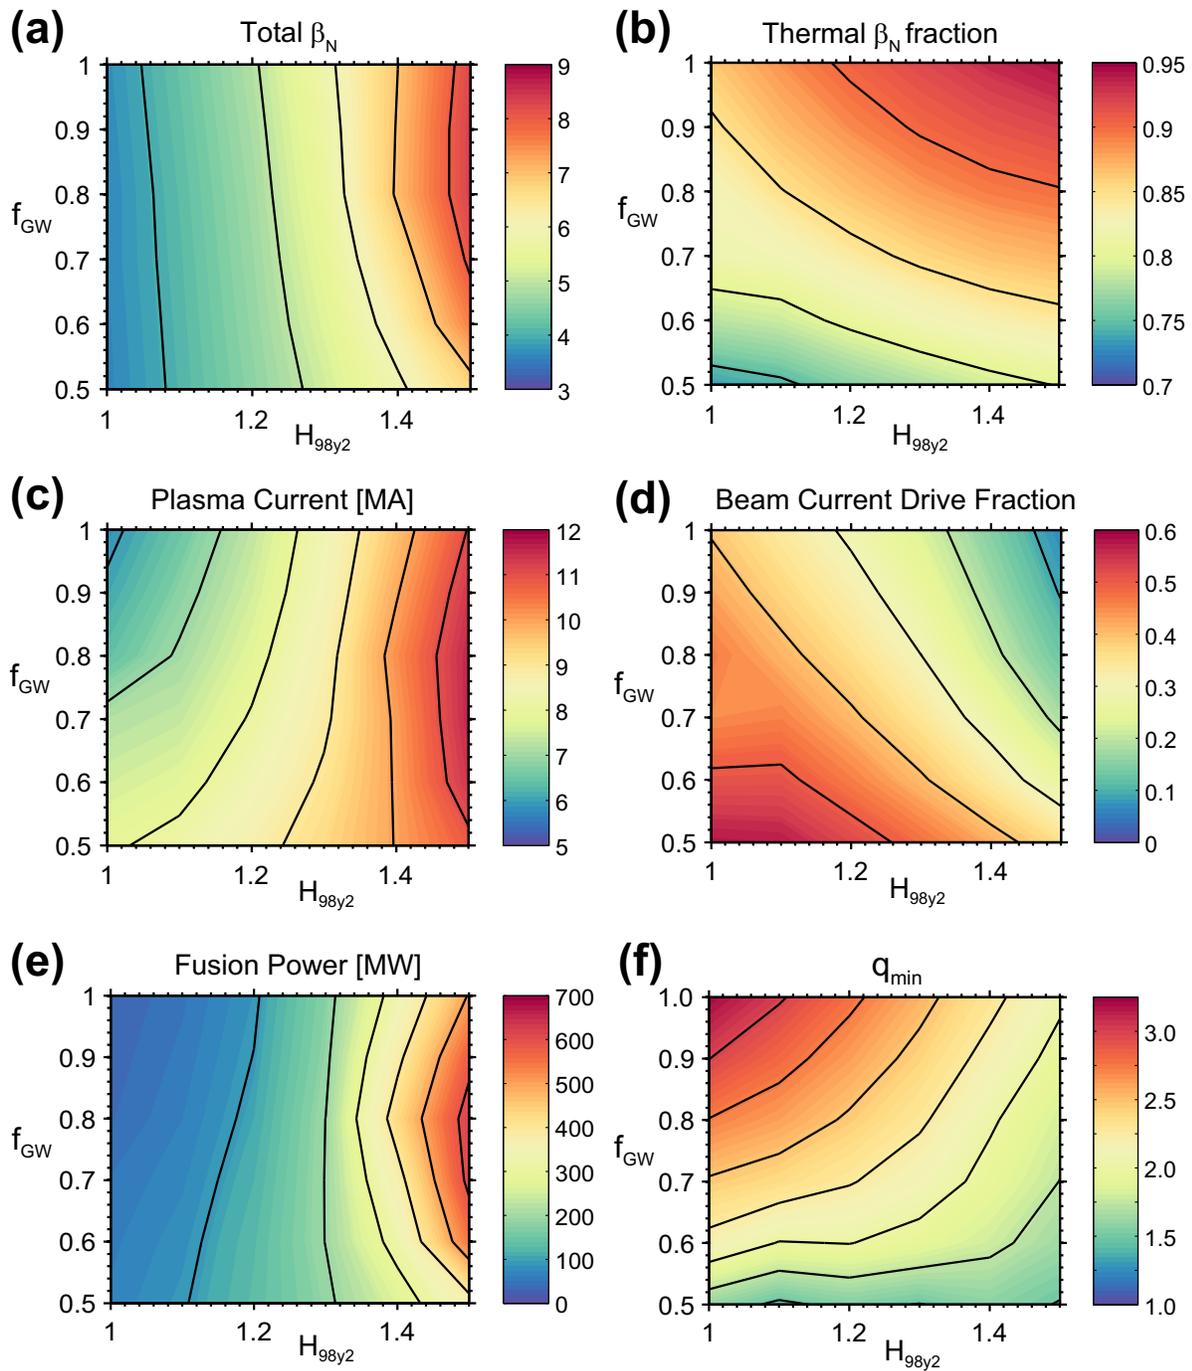


Figure 21. Plasma performance parameters computed by TRANSP as a function of confinement multiplier H_{98y2} and normalized density f_{GW} for 50-50% D-T plasma.

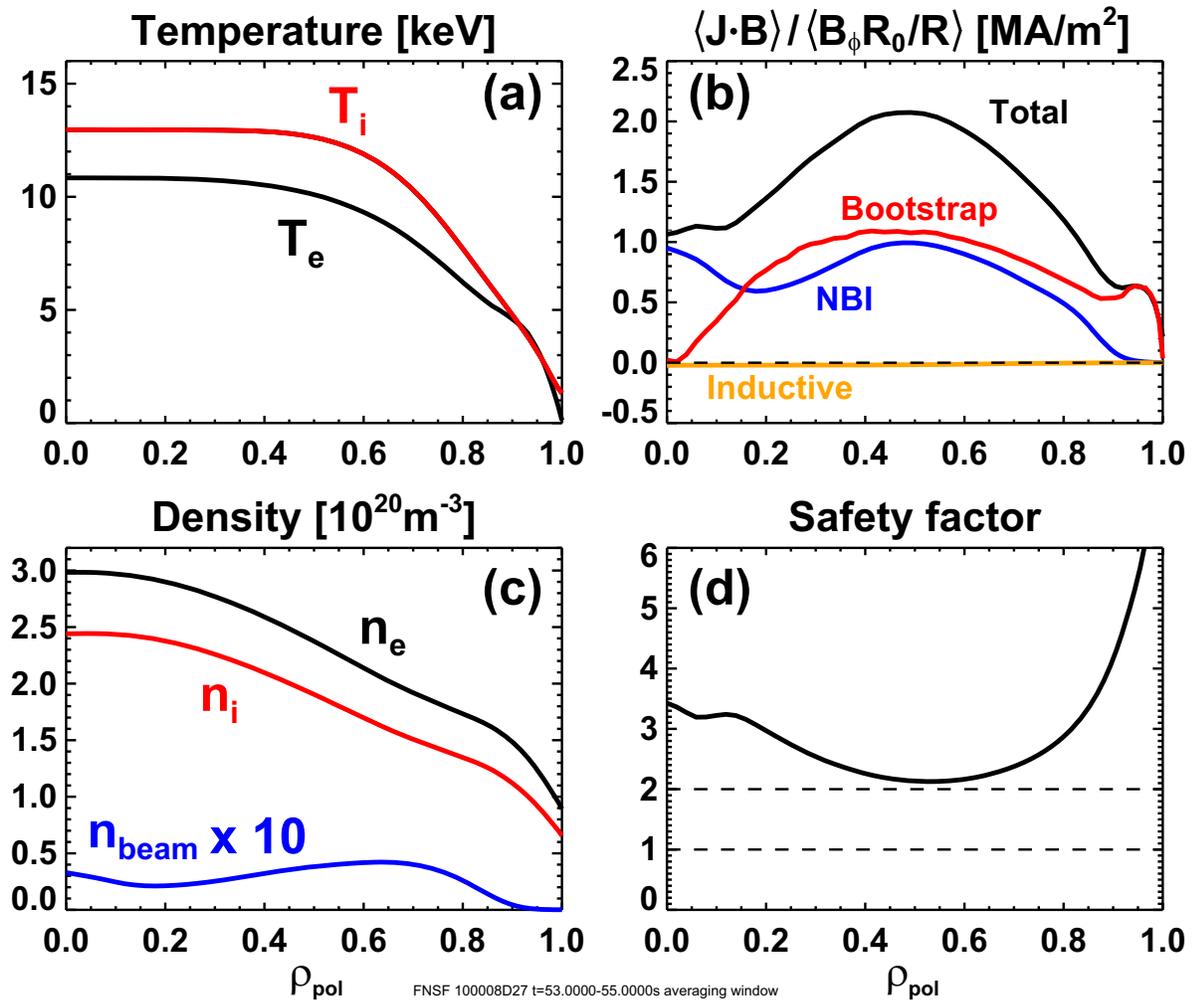


Figure 22. Profiles from a TRANSP simulation of a D-T ST-FNSF plasma scenario with 200MW of fusion power.

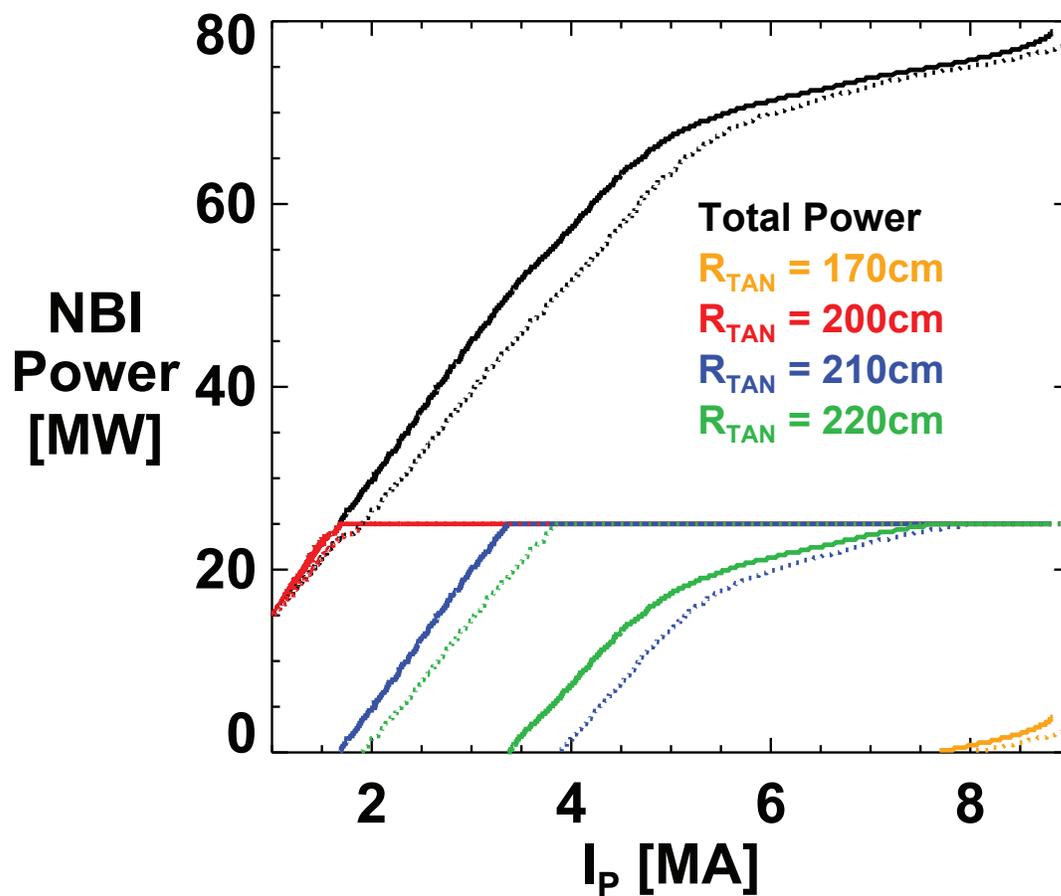


Figure 23. Total and individual source NNBI heating powers versus plasma current for $R_{tan} = 170/200/210/220\text{cm}$ injection tangency radii for two different beam voltage combinations: 0.5/0.1/0.5/0.5 MeV (solid) and 0.5 MeV for all R_{TAN} (dashed).


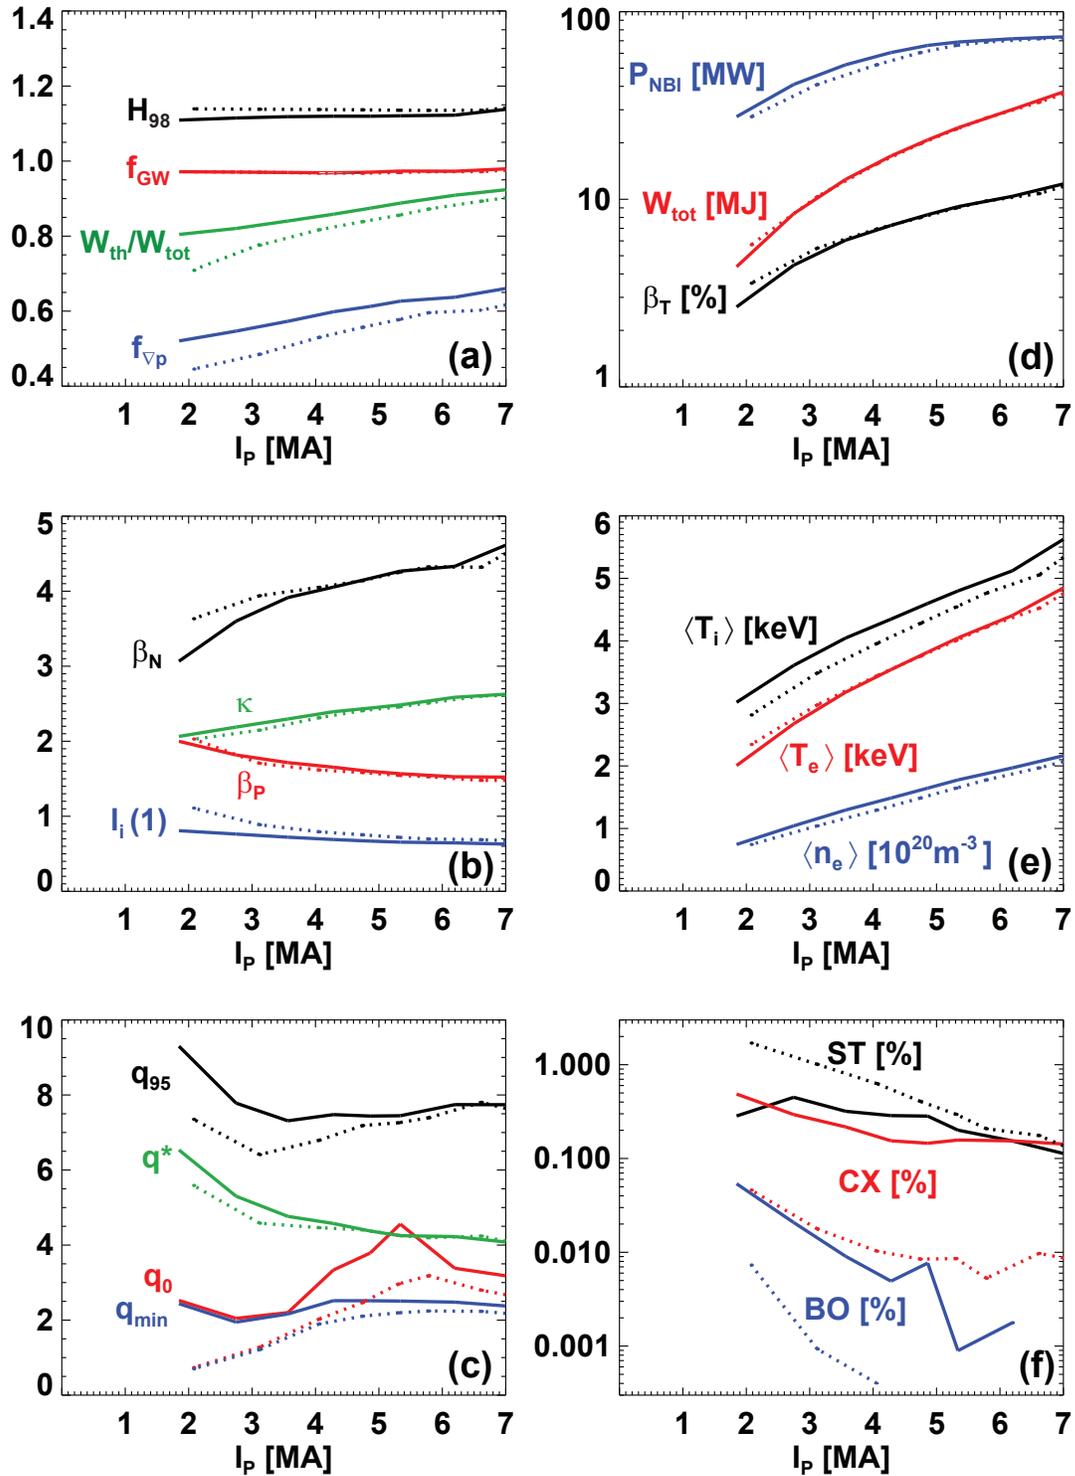


Figure 24. Plasma performance parameters computed by TRANSP as a function of plasma current for 100% non-inductive D-D plasmas.

(a) Concept 1 - NSTX-U-like

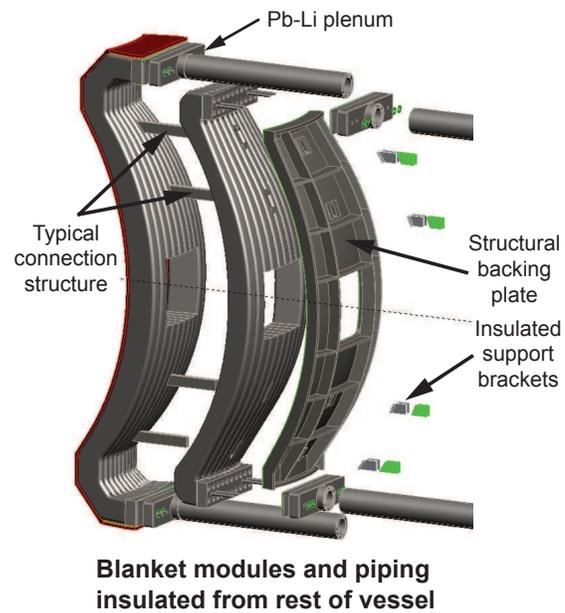

(b) Concept 2 - DIII-D-like

Toroidal electrode on top of blanket structure, analogous to CHI ring electrode previously used on DIII-D

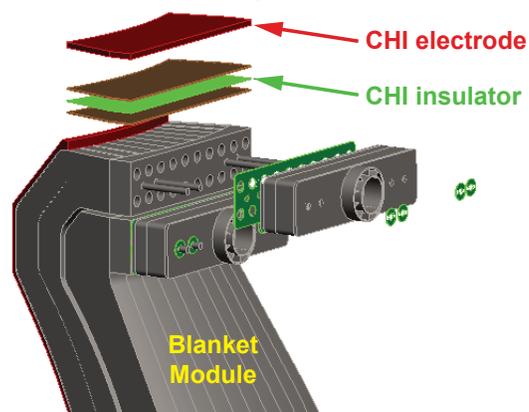


Figure 25. Possible concepts for incorporating electrical insulators in dual-coolant lead-lithium (DCLL) blanket segments to support voltage biasing for CHI start-up in ST-FNSF (Figure reproduced with permission [146]).

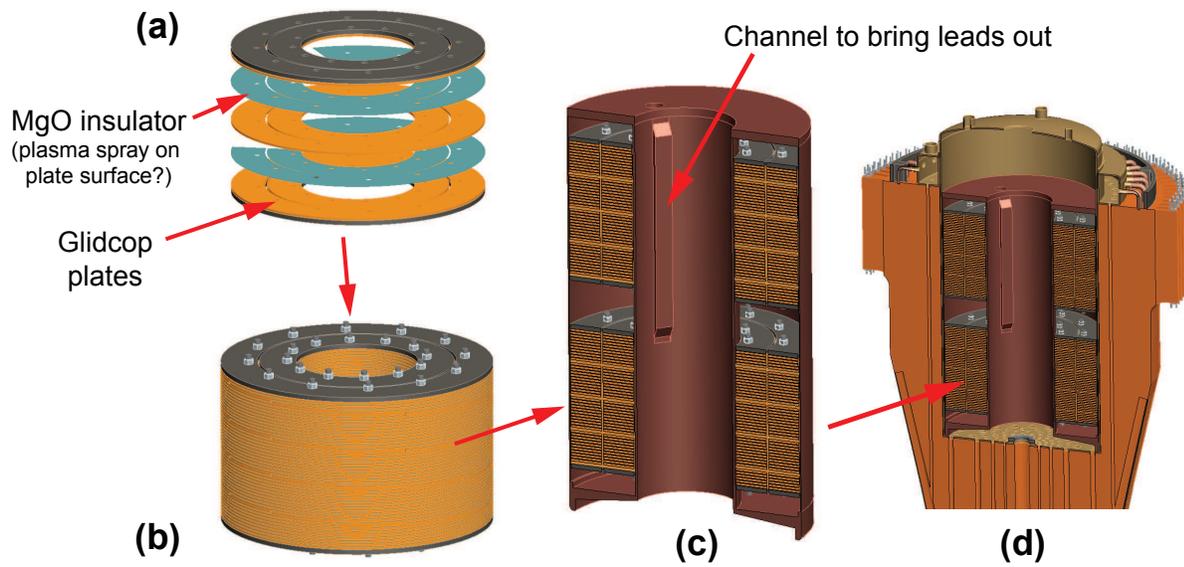


Figure 26. Bitter magnet concept for divertor poloidal field coils embedded in the ends of the toroidal field center-post.

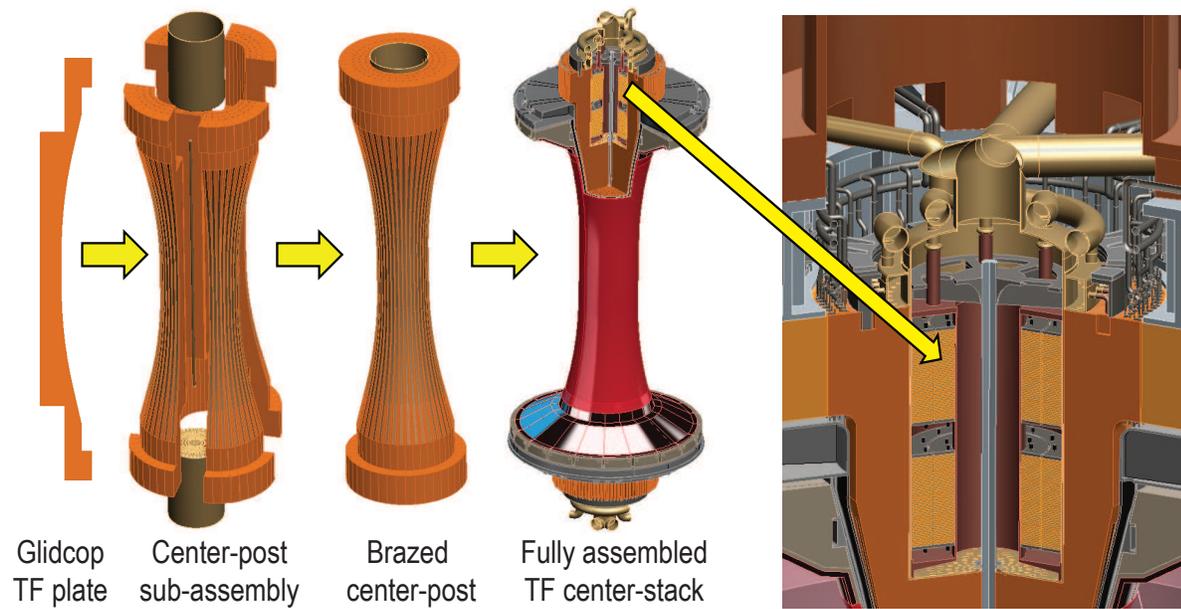


Figure 27. Center-stack assembly sequence from TF conductor plates to sub-assemblies to brazed centerpost conductors to a fully assembled centerpost.

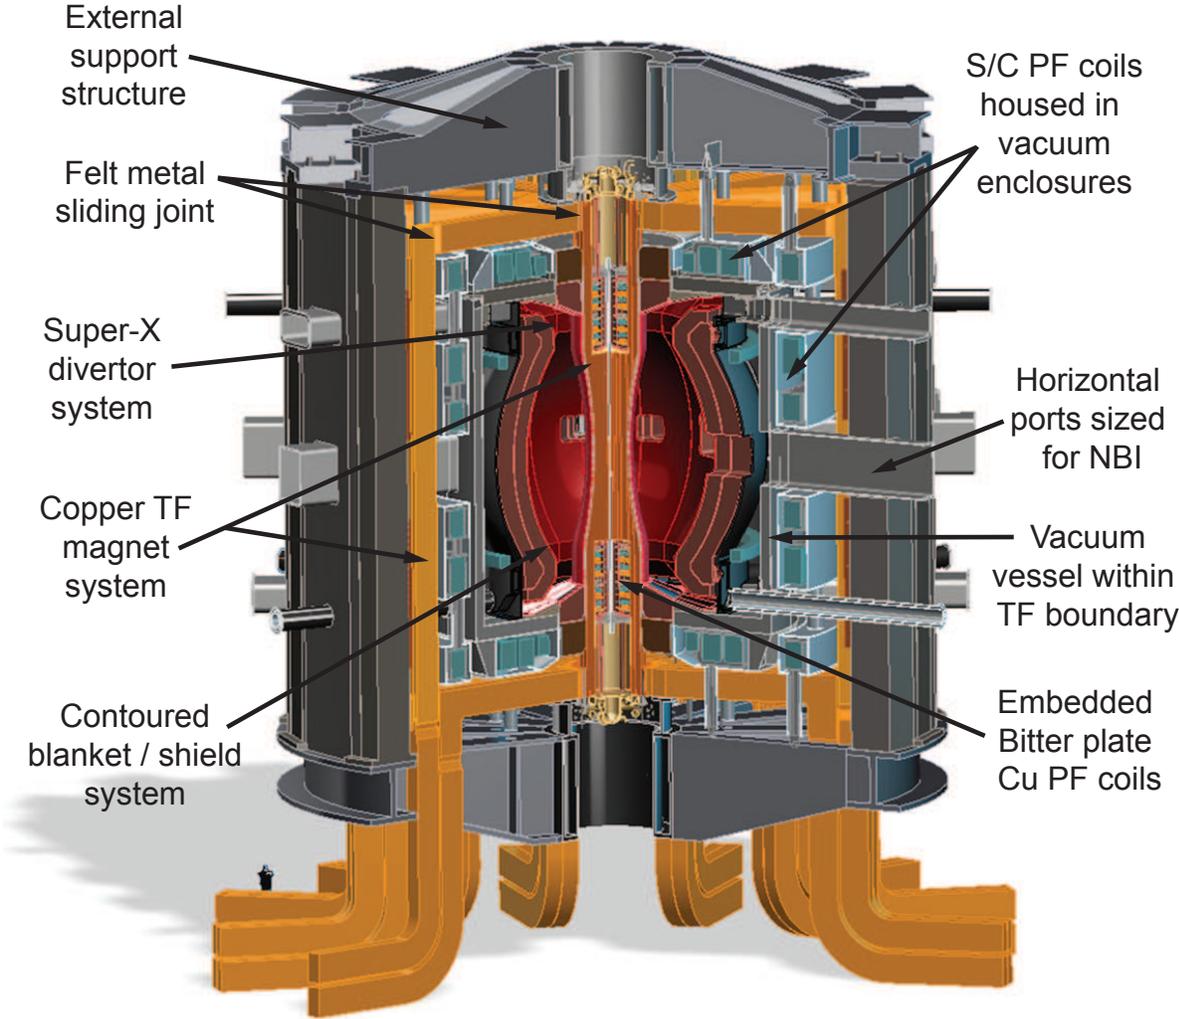


Figure 28. General arrangement for ST-FNSF showing TF and PF magnets, blanket modules, vacuum vessel, and external support structures.

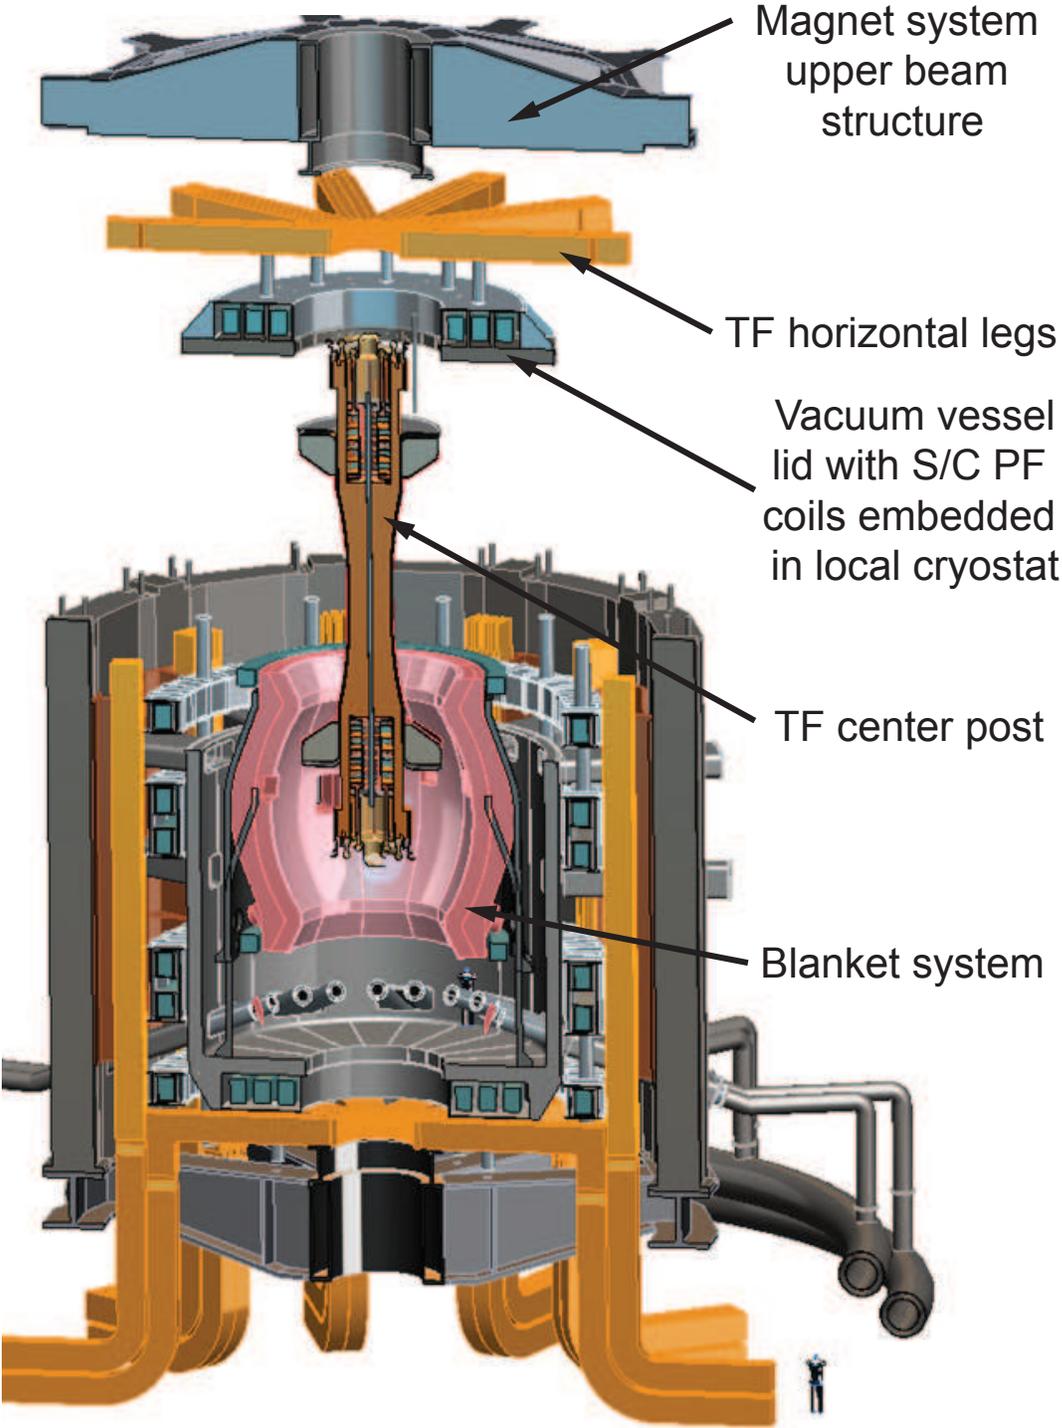


Figure 29. Vertical maintenance scheme showing removal of upper magnet system beam structure, TF horizontal legs, upper PF coils, TF centerpost, and blanket system.

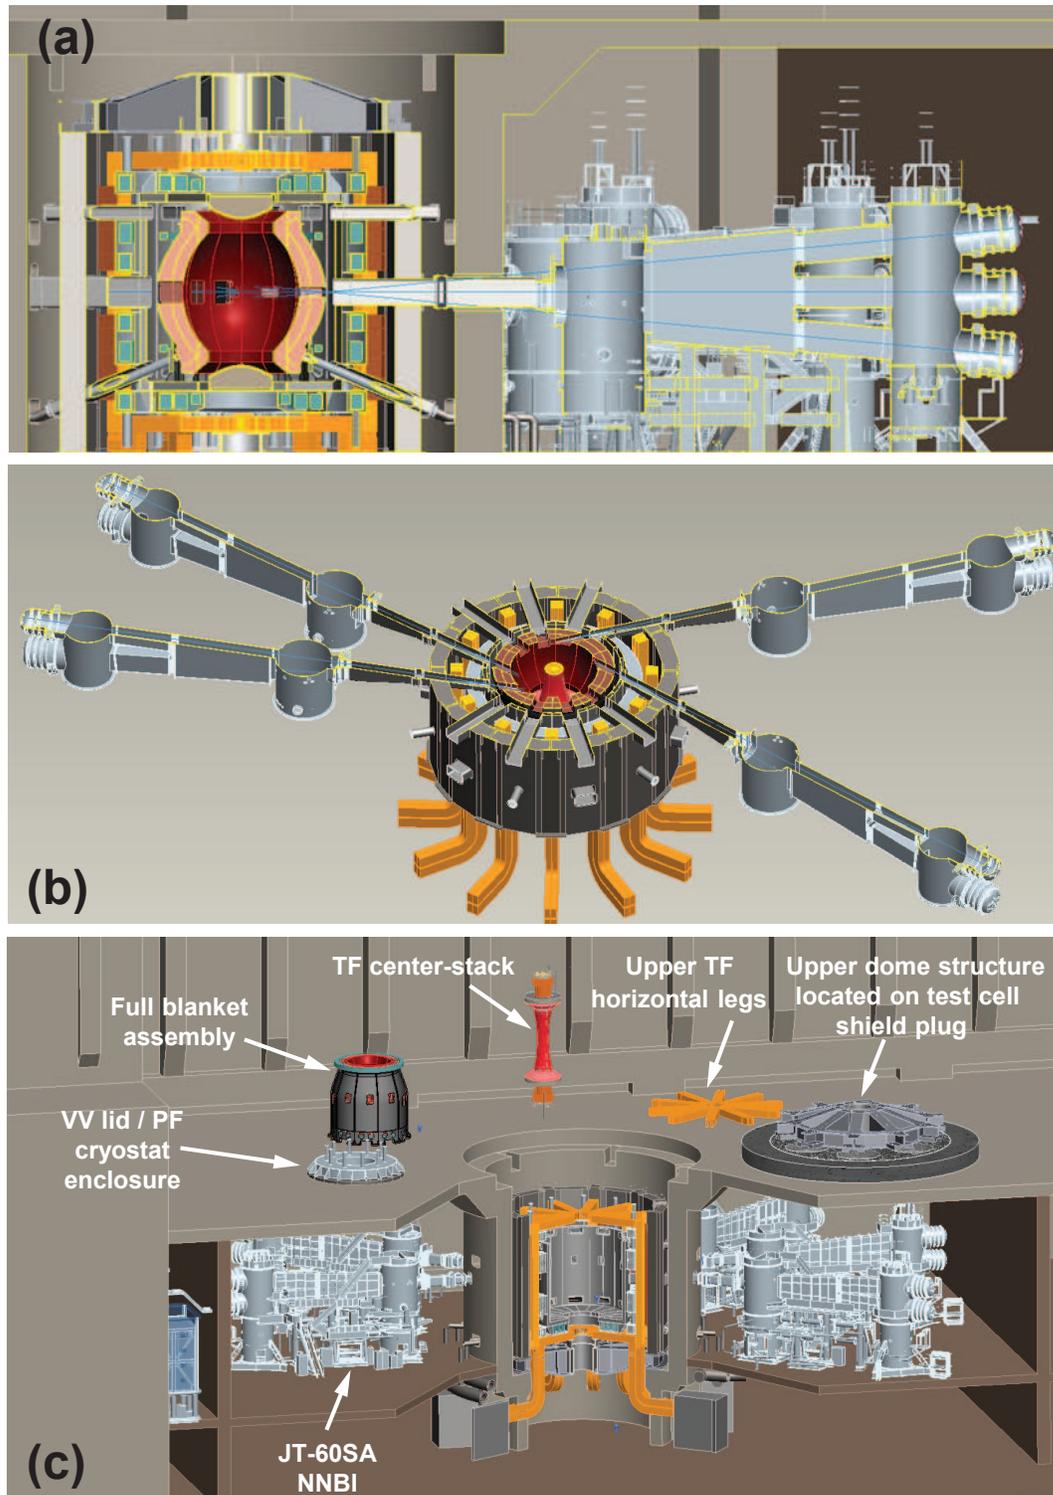


Figure 30. ST-FNSF test-cell layout showing (a) vertically-stacked NNBI beam-line aiming, (b) toroidal layout of NNBI systems, and (c) upper hot-cell above main vessel chamber.

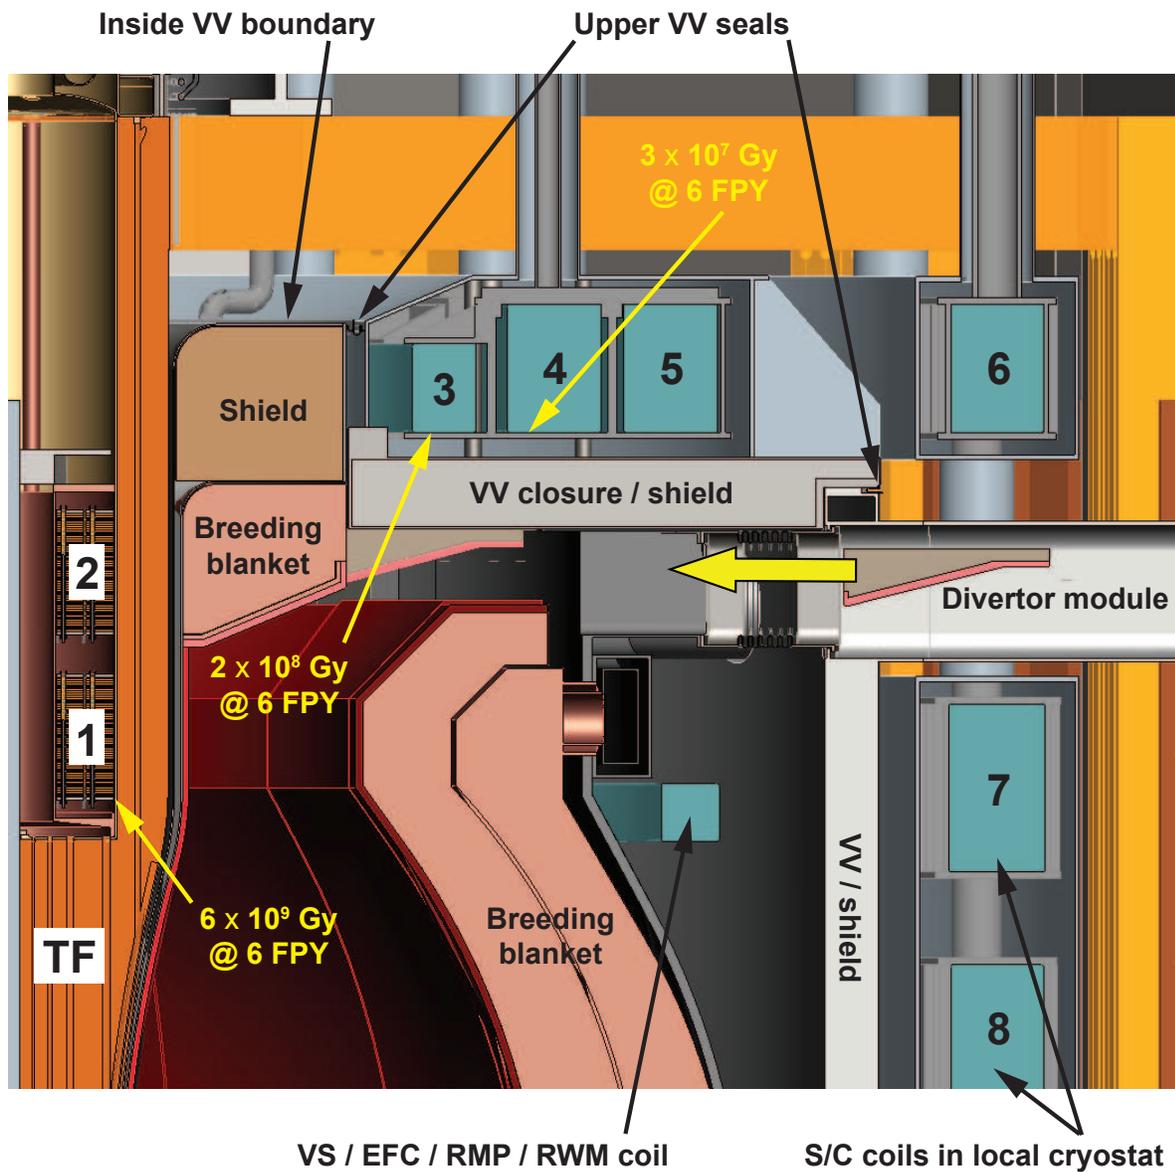


Figure 31. Radial maintenance ports for divertor modules (thick yellow arrow), vacuum vessel boundary and re-weldable seal details, and in-vessel radiation dose values at various inboard divertor field coil positions (thin yellow arrows).

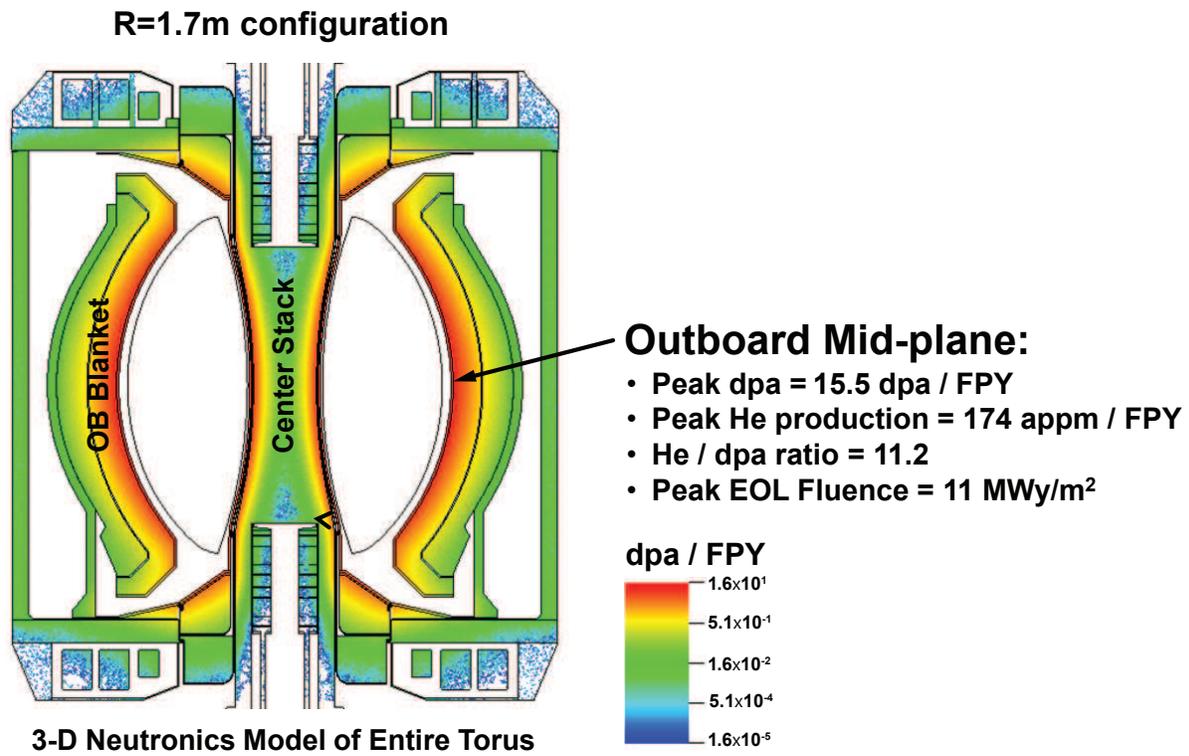


Figure 32. Distribution of dpa for $R_0=1.7\text{m}$ ST-FNSF device.


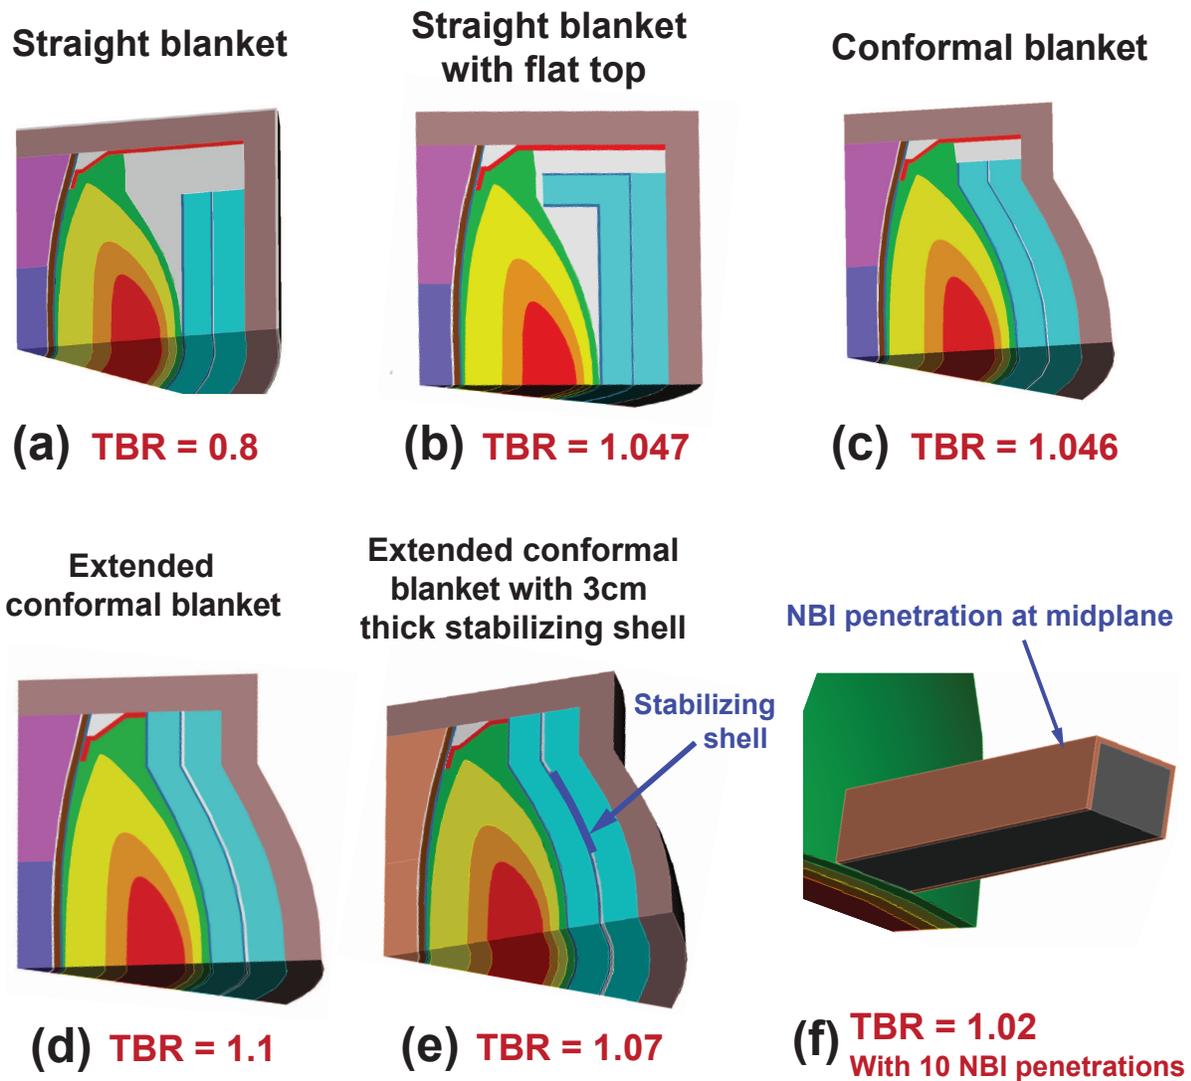


Figure 33. Calculated TBR for several nominally axisymmetric (except for case f) blanket configurations for $R_0=1.7\text{m}$ ST-FNSF.

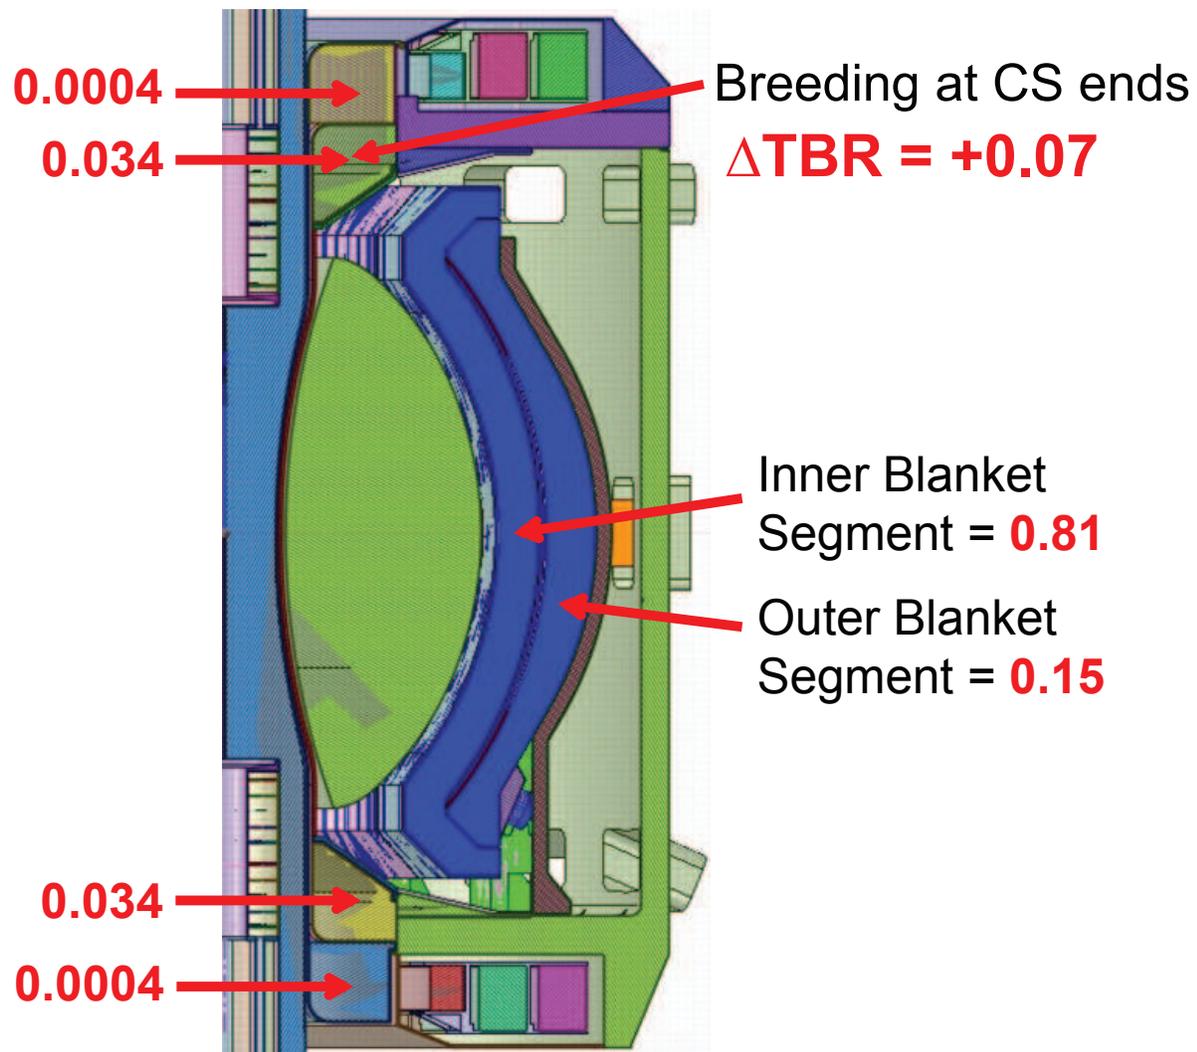

Total TBR ~ 1.03 with no penetrations or ports
(heterogenous outboard blanket)

Figure 34. Calculated TBR for various components of fully 3D model of $R_0=1.7\text{m}$ FNSF.

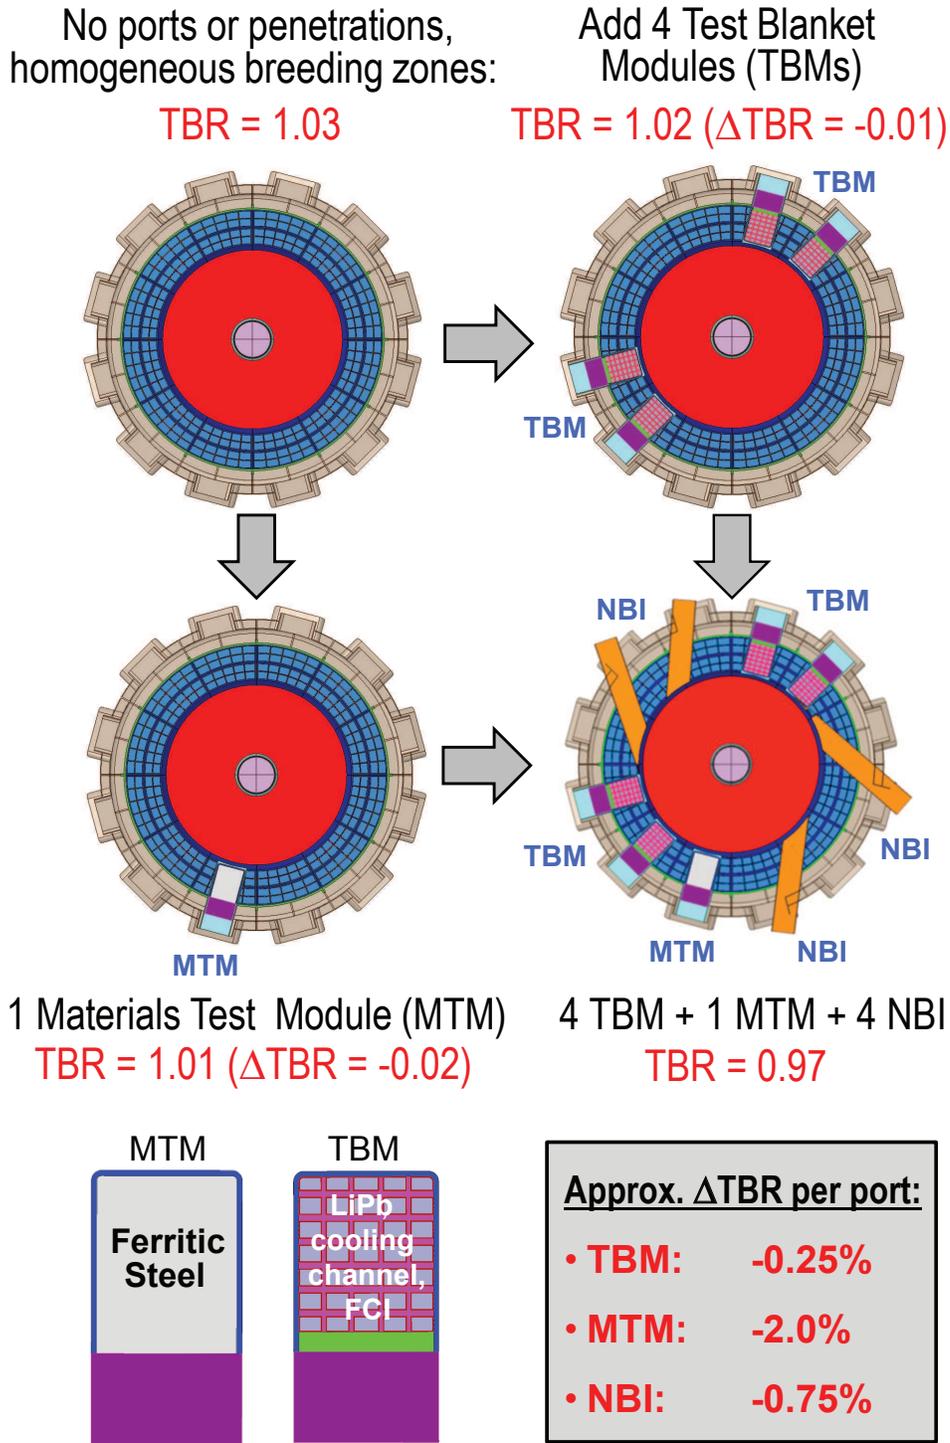


Figure 35. Calculated TBR versus type of mid-plane penetrations for $R_0=1.7\text{m}$ ST-FNSF configuration.

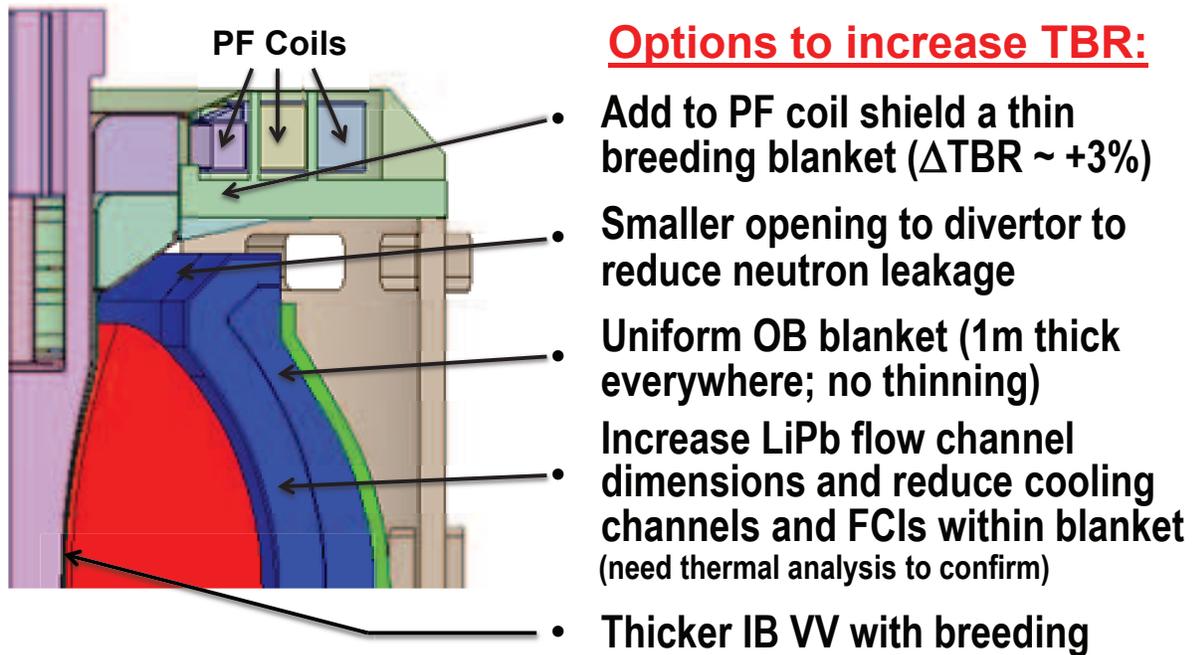


Figure 36. Options for increasing tritium breeding ratio for $R_0=1.7$ m device.

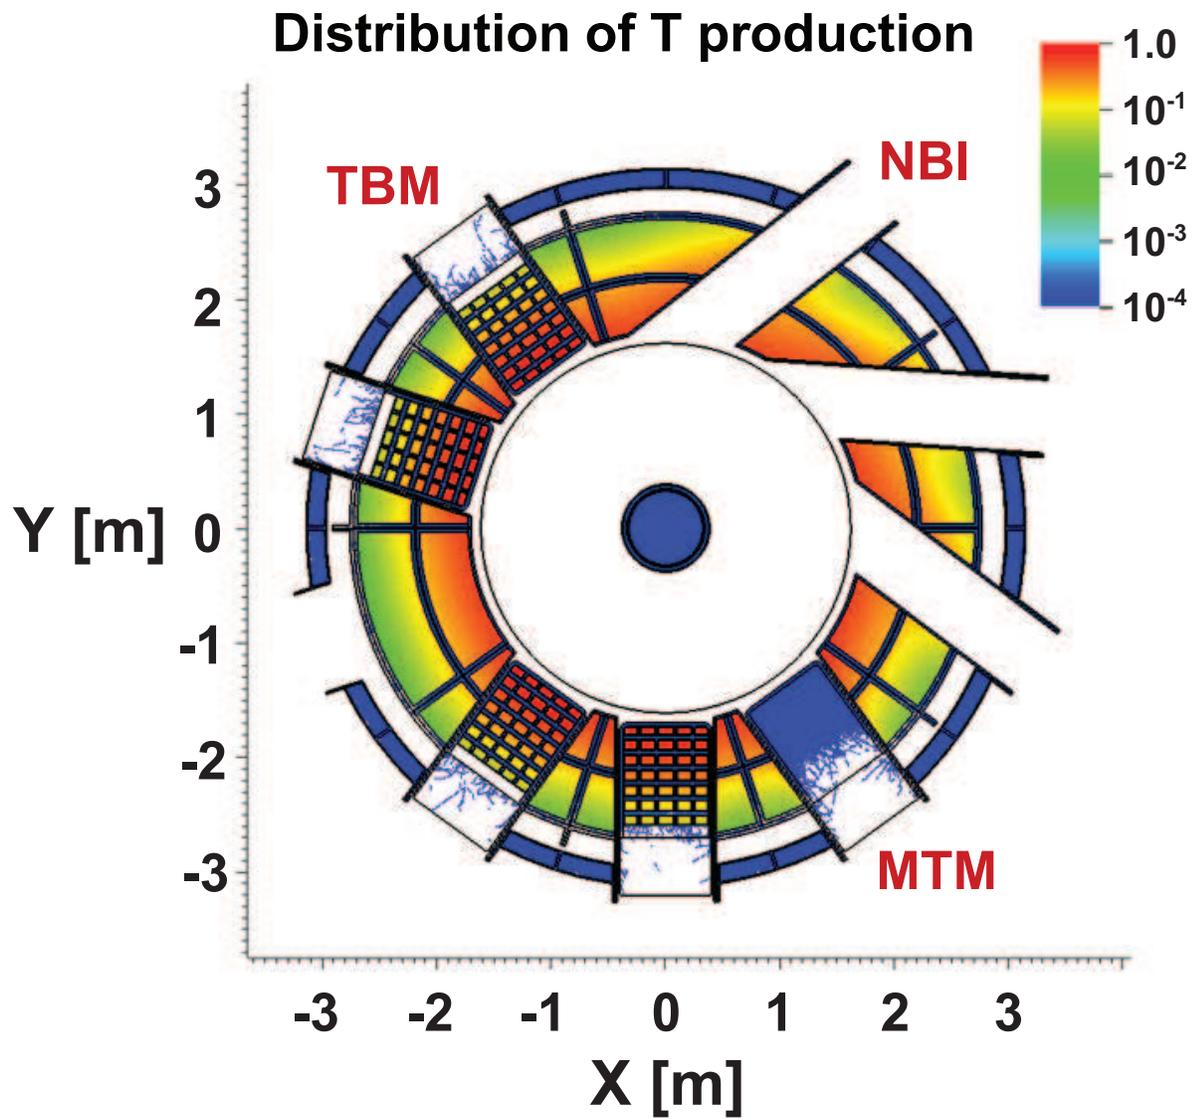


Figure 37. Calculated breeding distribution for $R_0=1.0\text{m}$

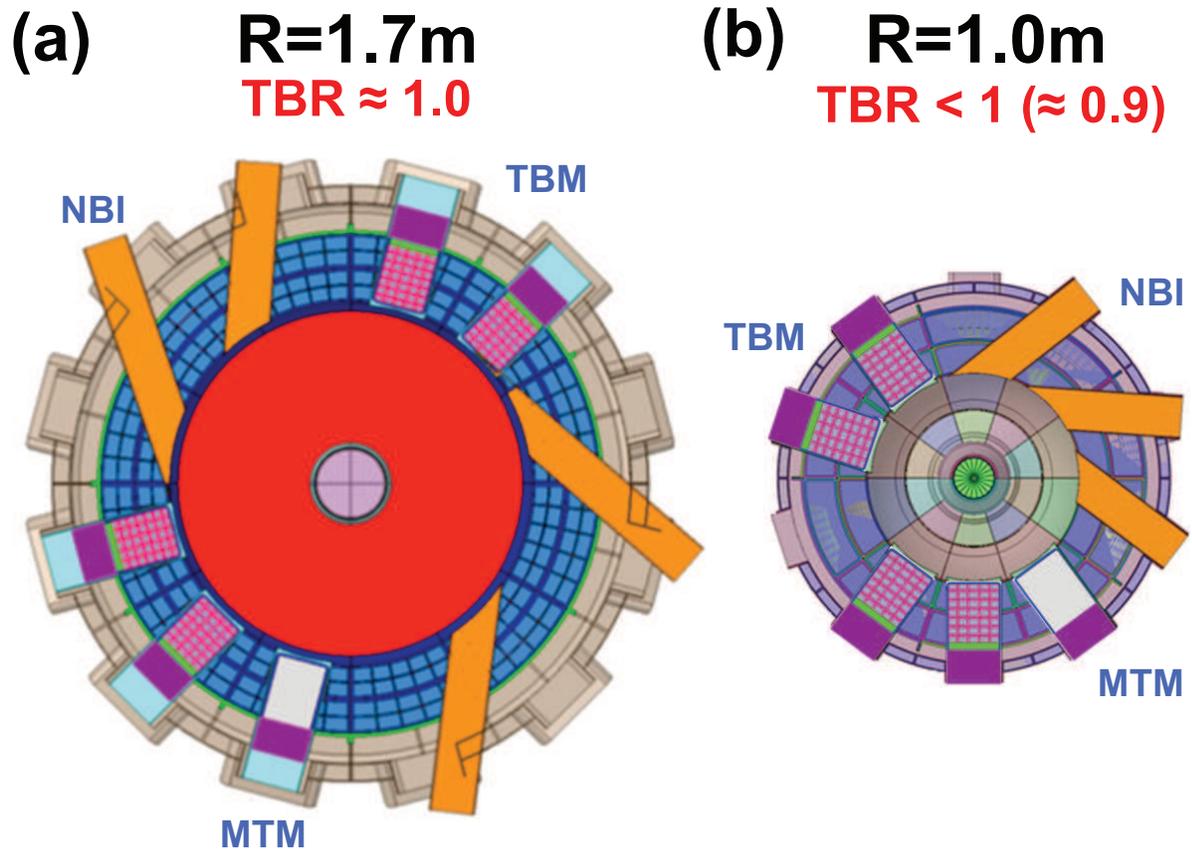


Figure 38. Side-by-side comparison of $R_0 = 1.7\text{m}$ and 1.0m ST-FNSF device sizes, TBR values, and port layouts.

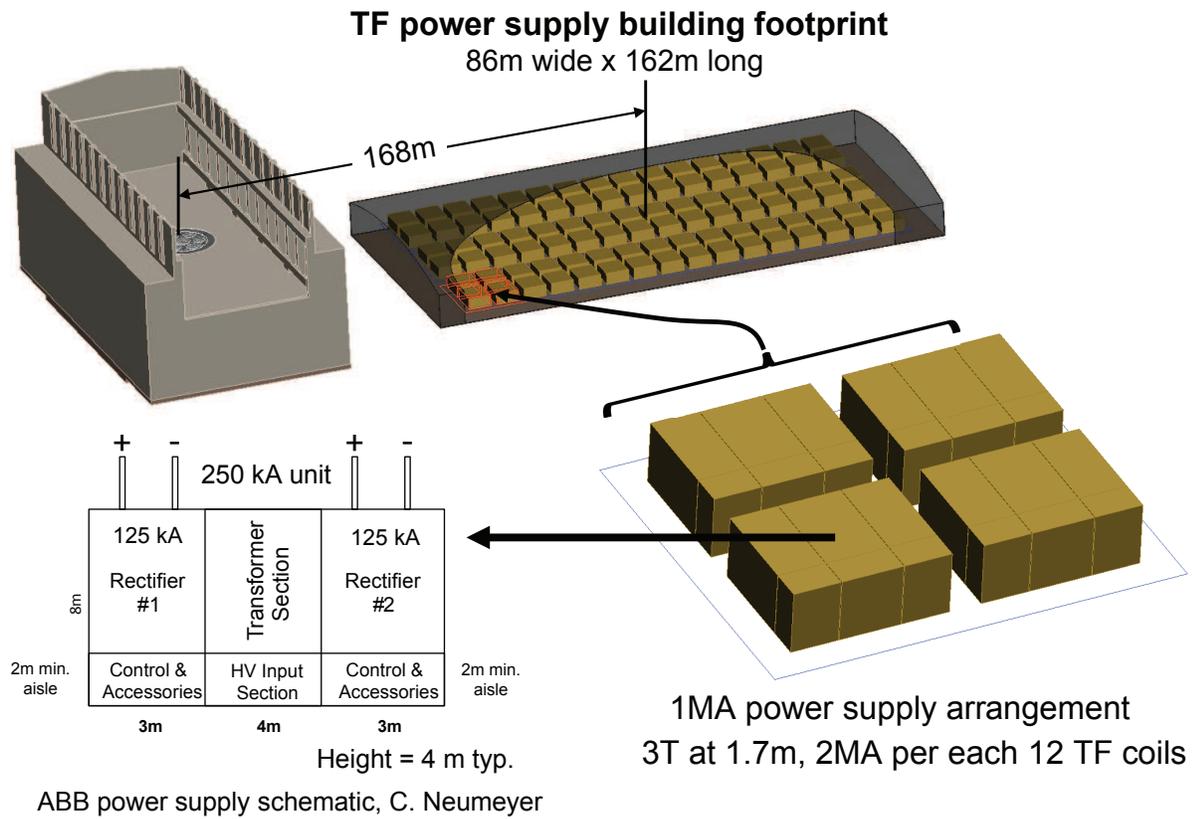


Figure 39. TF power supply building footprint for the $R_0 = 1.7\text{m}$ ST-FNSF device using conventional rectifier power supplies. (Figure reproduced with permission [154])

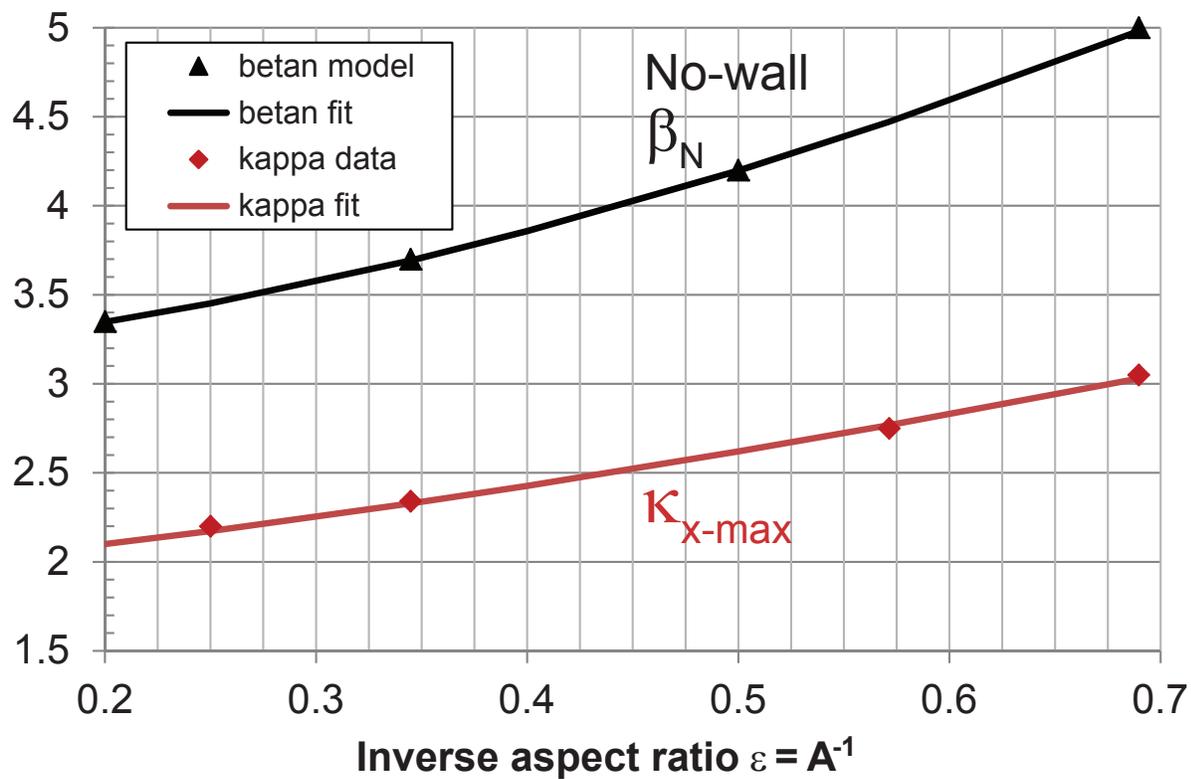


Figure 40. No-wall $n=1$ kink stability β_N limit and maximum double-null separatrix elongation κ_x versus inverse aspect ratio.

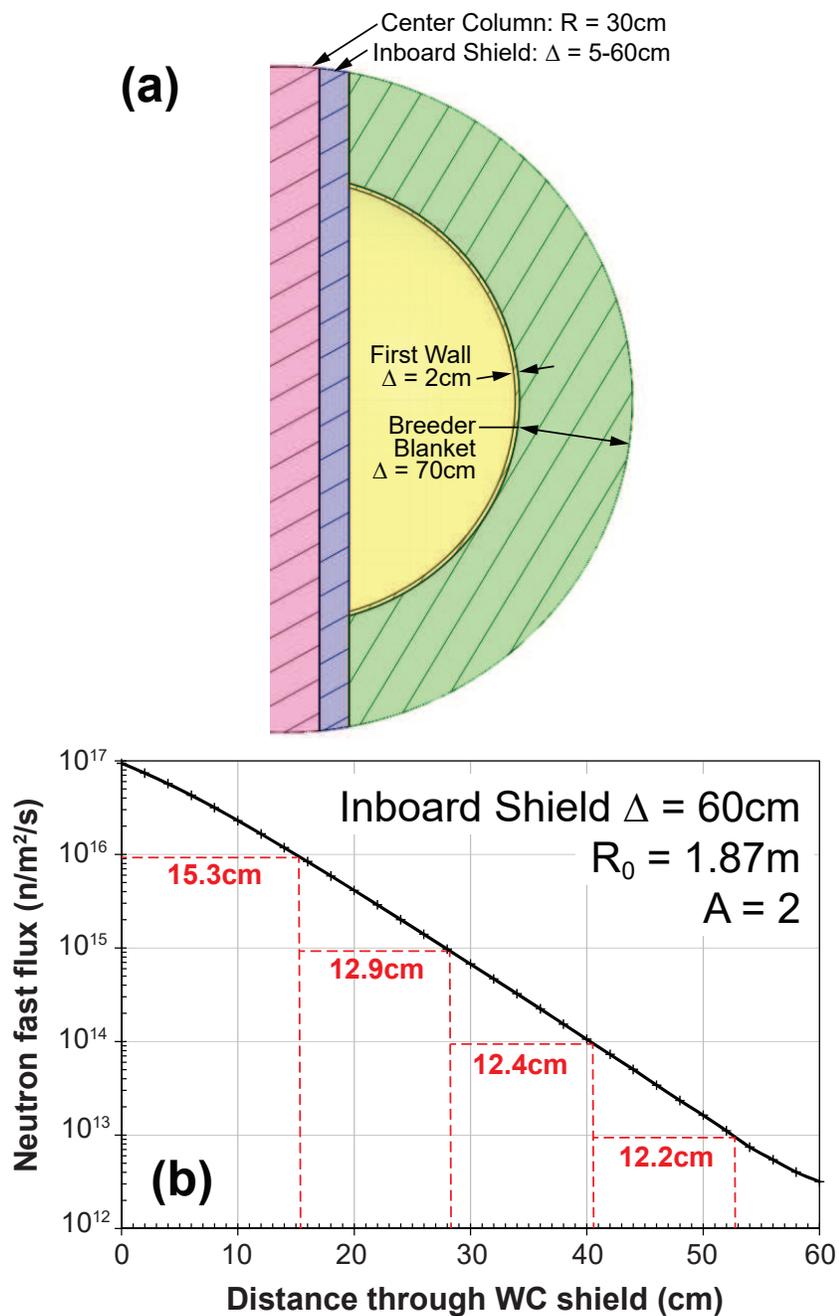


Figure 41. (a) Simplified model for computing fast neutron flux onto HTS TF magnet in center column, (b) fast neutron flux in inboard shield at vertical midplane as a function of distance from front of shield.

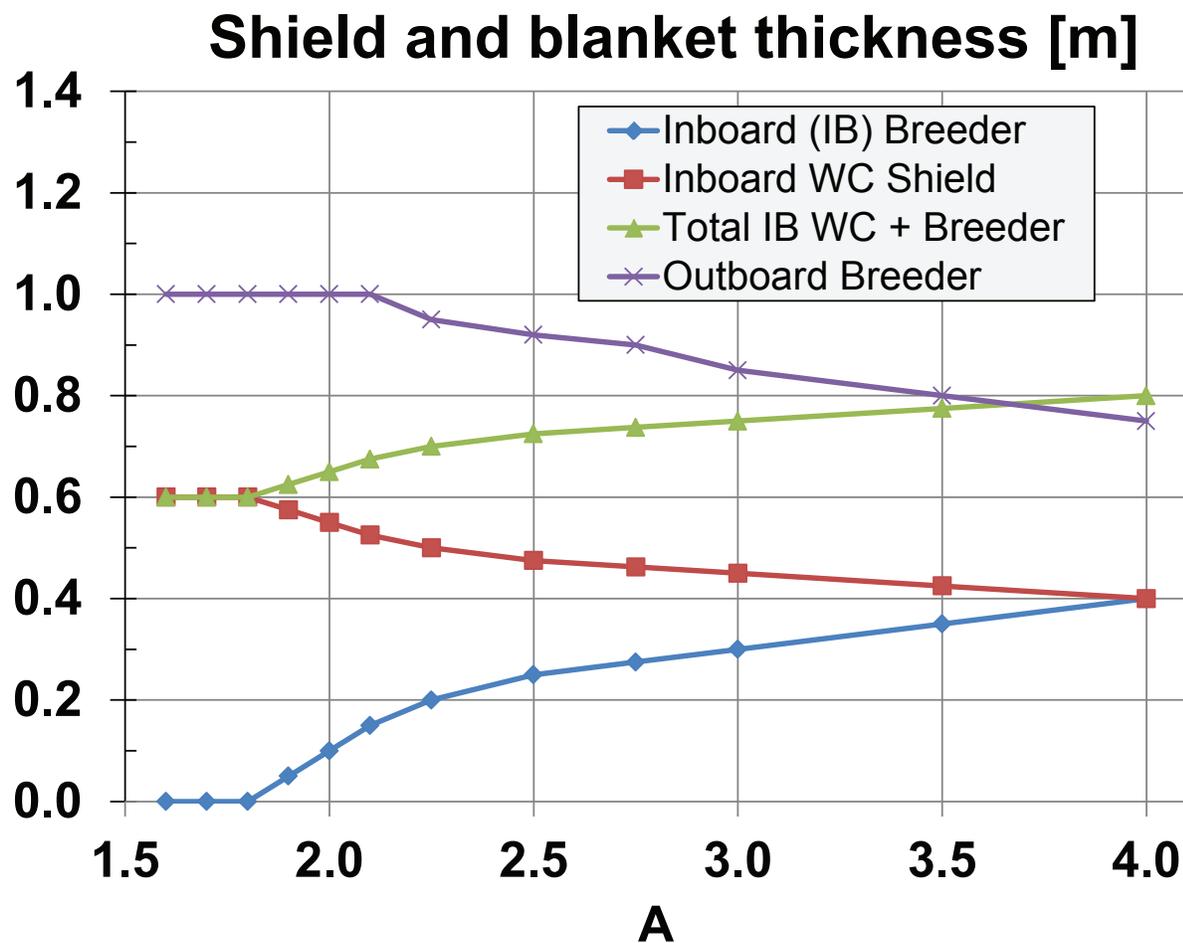


Figure 42. Simplified model for WC shield and breeding blanket thickness versus aspect ratio.

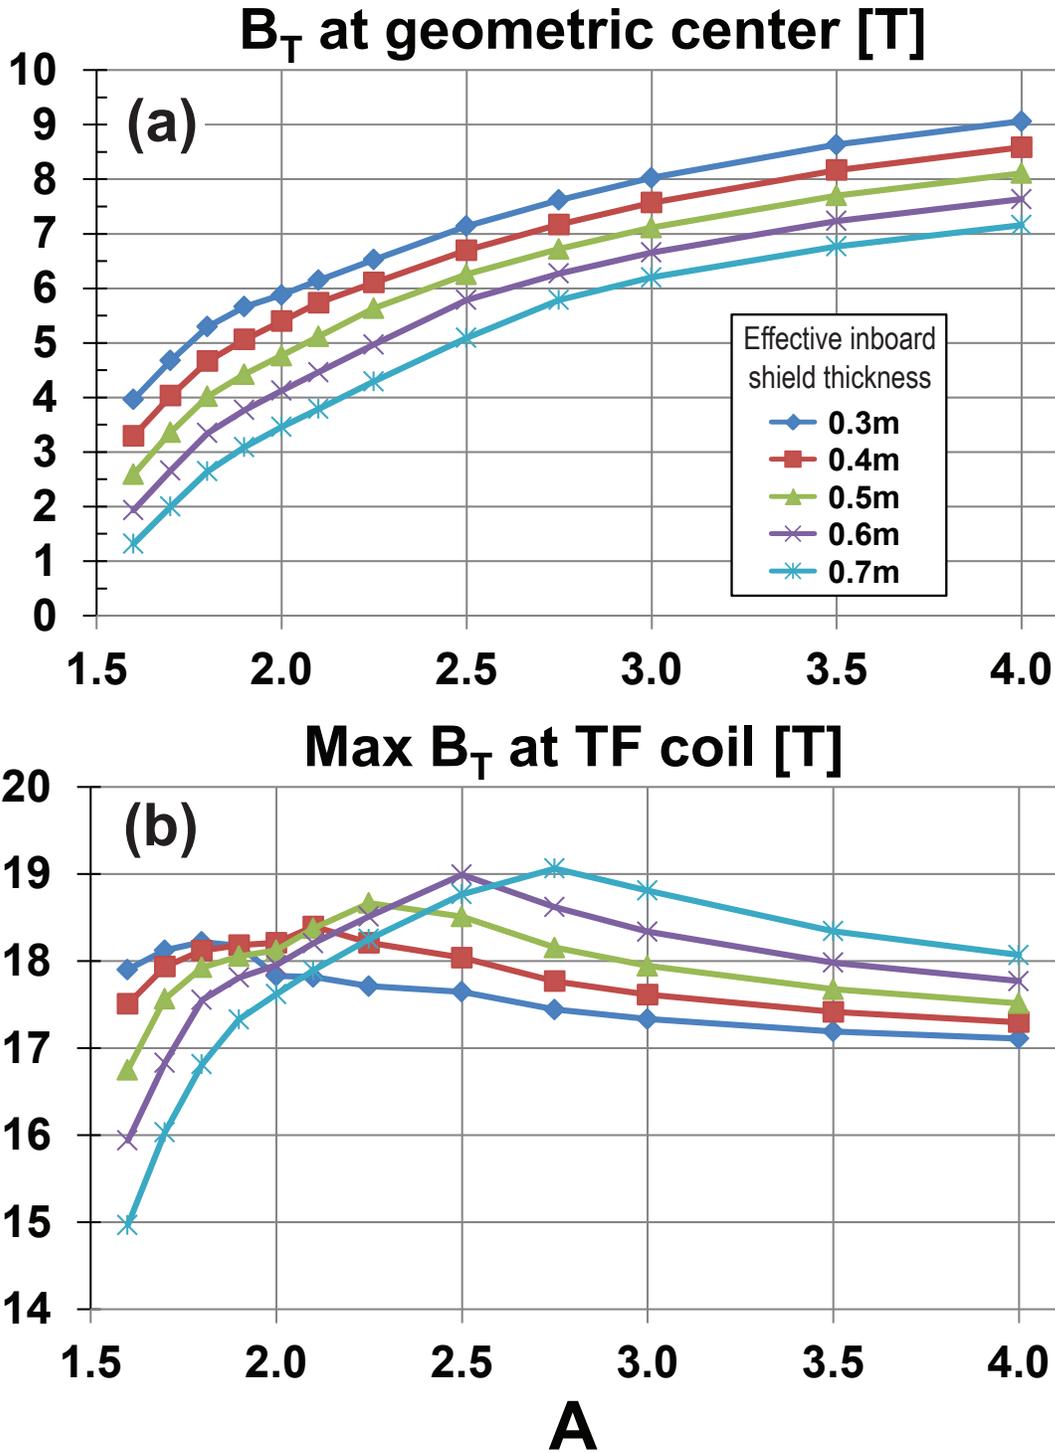


Figure 43. (a) Vacuum toroidal magnetic field at plasma geometric center, and (b) peak fields at TF magnet for $R_0 = 3\text{m}$ HTS TF ST/AT pilot plants versus aspect ratio A and effective (WC-equivalent) inboard shielding thickness.

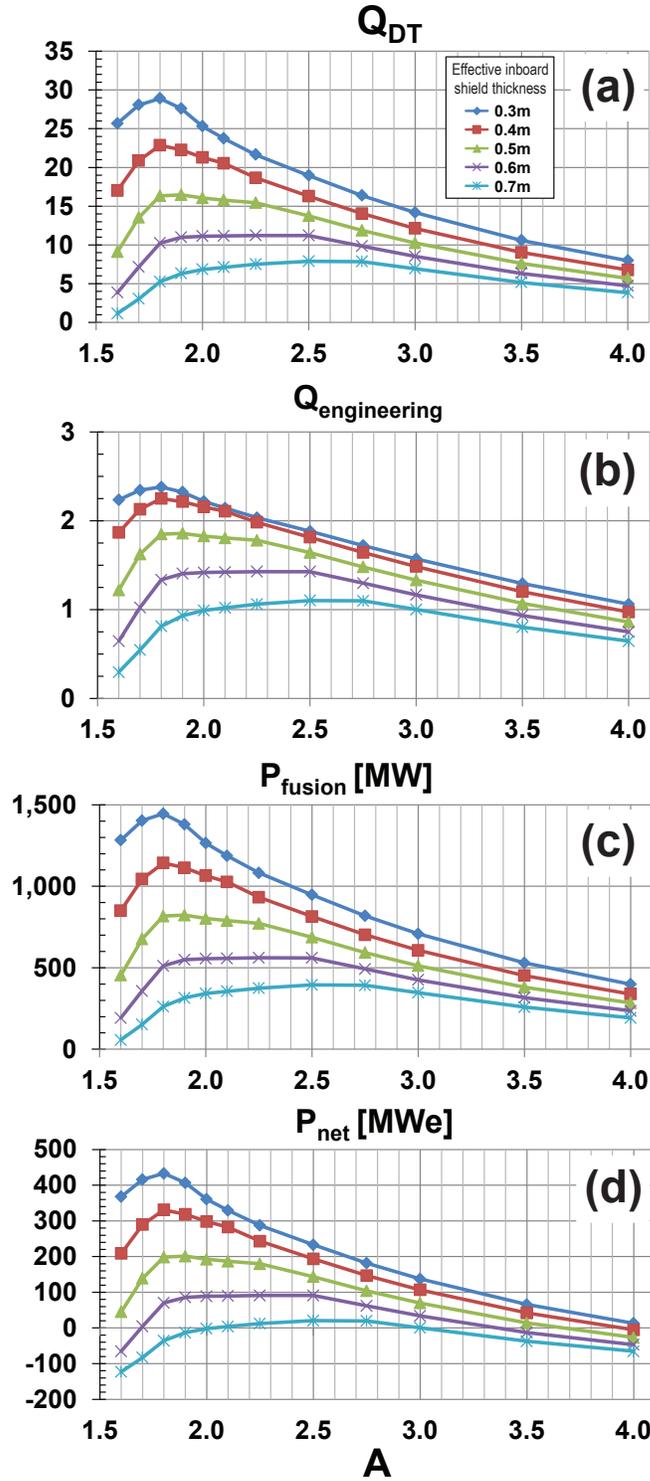


Figure 44. (a) Fusion gain Q_{DT} , (b) engineering gain Q_{eng} , (c) fusion power P_{fusion} , and (d) net electrical power for $R_0 = 3\text{m}$ HTS ST/AT pilot plants versus aspect ratio A and effective inboard shielding thickness.

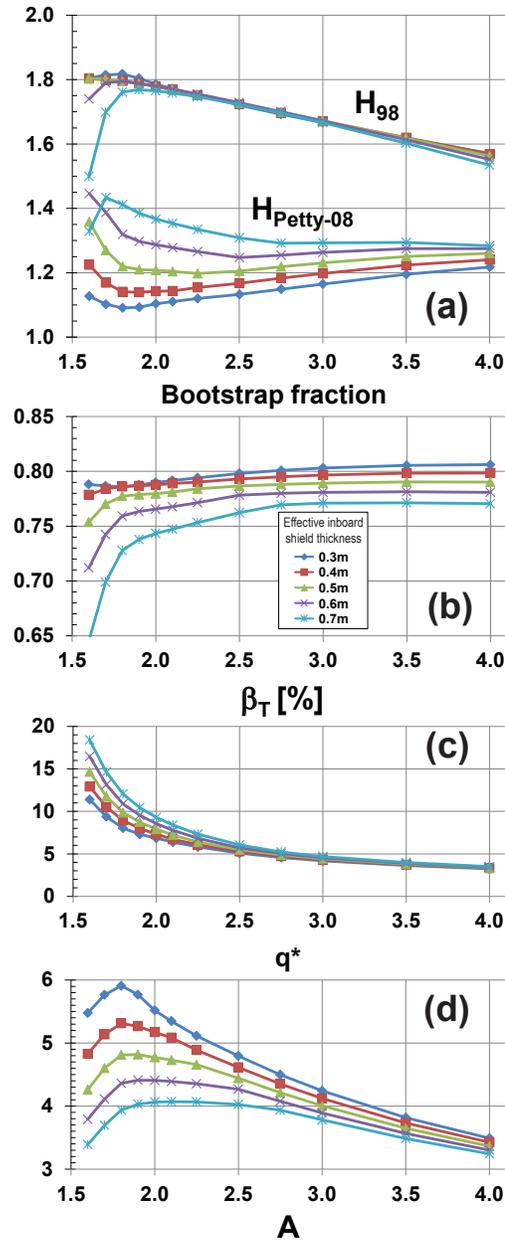


Figure 45. (a) Confinement multipliers H_{98} and $H_{Petty-08}$, (b) bootstrap fraction, (c) toroidal beta, and (d) kink safety factor q^* for $R_0 = 3\text{m}$ HTS ST/AT pilot plants versus aspect ratio A and effective inboard shielding thickness.

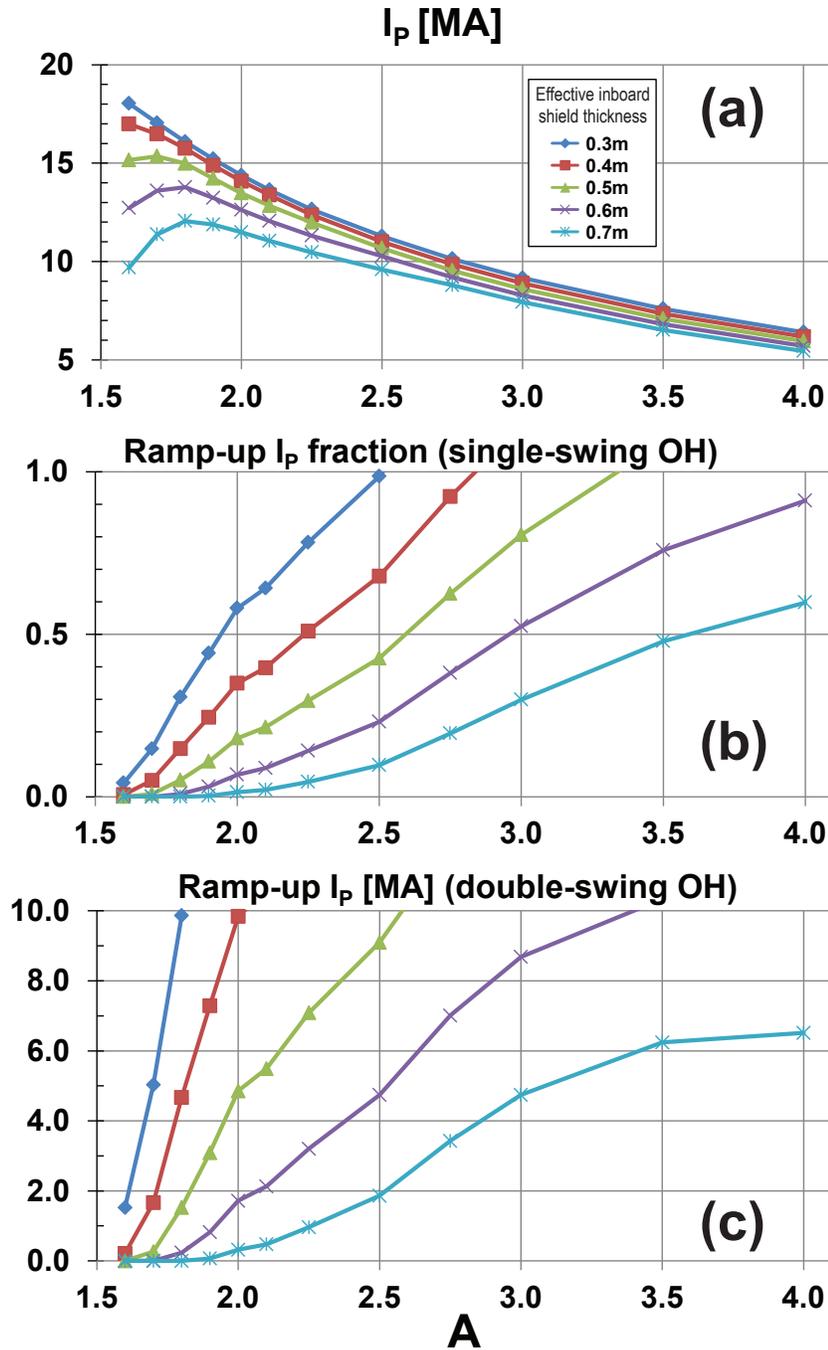


Figure 46. (a) Steady-state full-non-inductive plasma current, (b) fraction of steady-state plasma current achievable with assist of single-polarity swing of ohmic heating (OH) solenoid, and ramp-up plasma current achievable with double-swing OH for $R_0 = 3\text{m}$ HTS ST/AT pilot plants versus aspect ratio A and effective inboard shielding thickness.

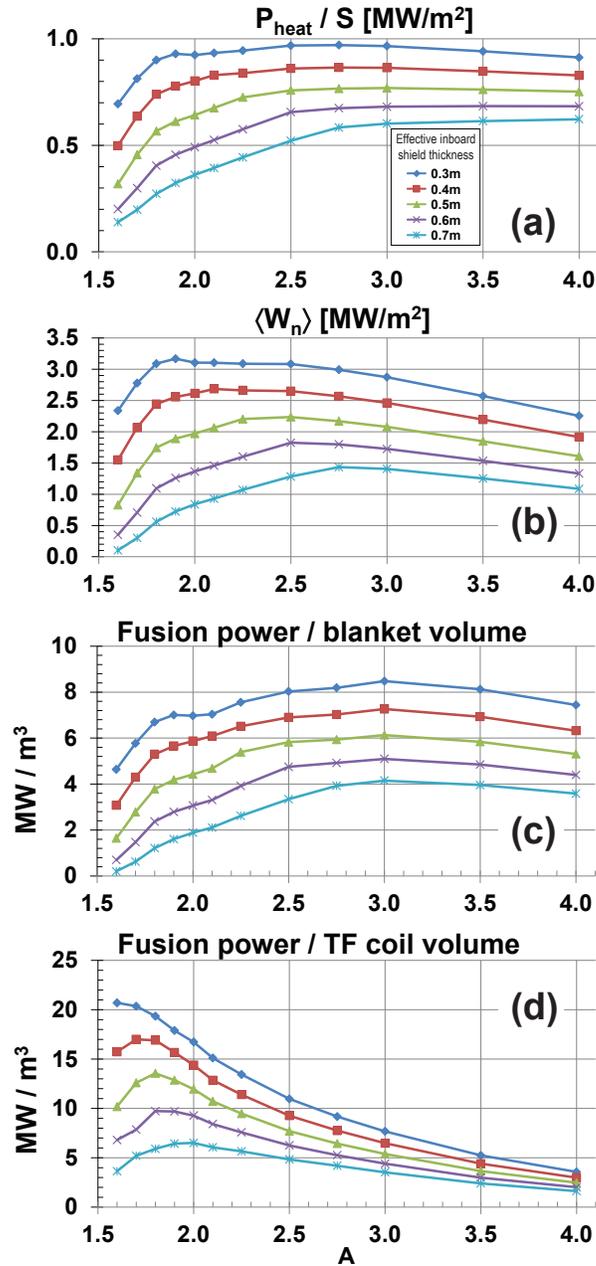


Figure 47. (a) Total heating power (NBI + α) normalized to surface area at plasma boundary, (b) surface-average neutron flux at plasma boundary, (c) fusion power normalized to estimated volume of breeding blankets, and (d) fusion power normalized to estimated volume of toroidal field magnets for $R_0 = 3\text{m}$ HTS ST/AT pilot plants versus aspect ratio A and effective inboard shielding thickness.

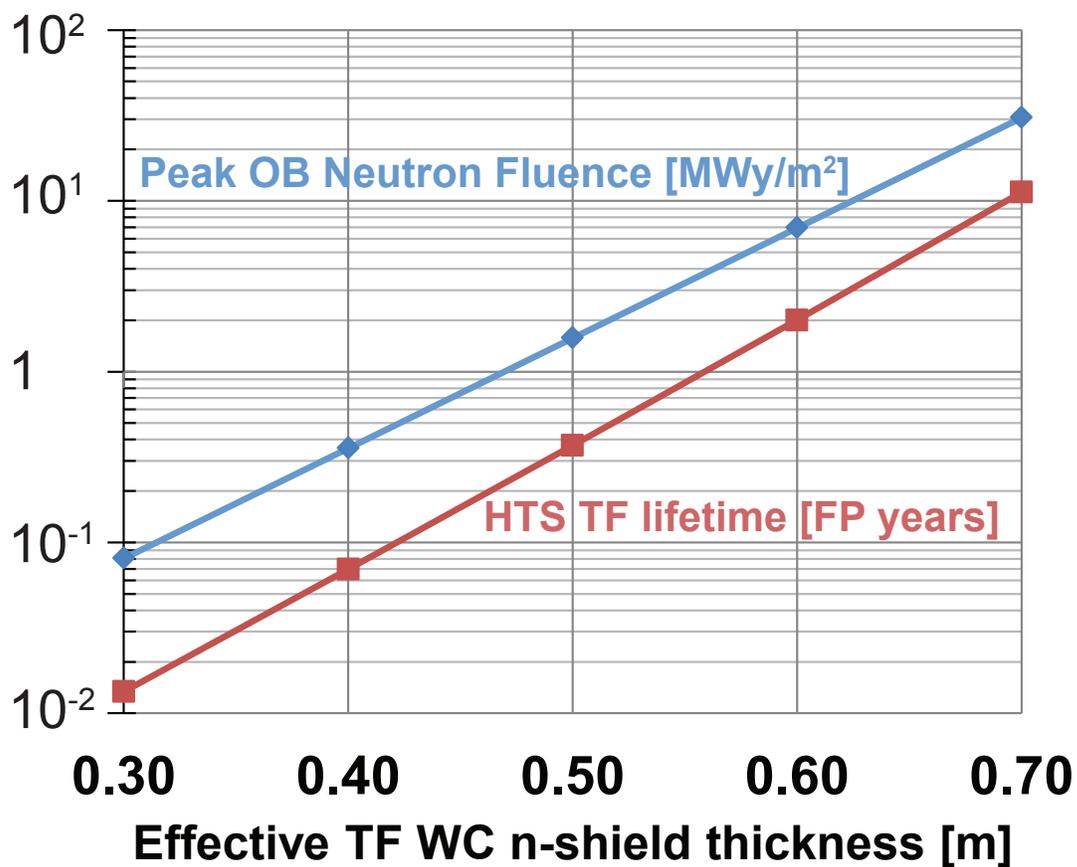


Figure 48. Minimum HTS TF magnet lifetime in full-power years selected from all aspect ratios (red) and peak outboard neutron fluence (blue) versus effective inboard shielding thickness for $R_0 = 3\text{m}$ HTS ST/AT pilot plants.

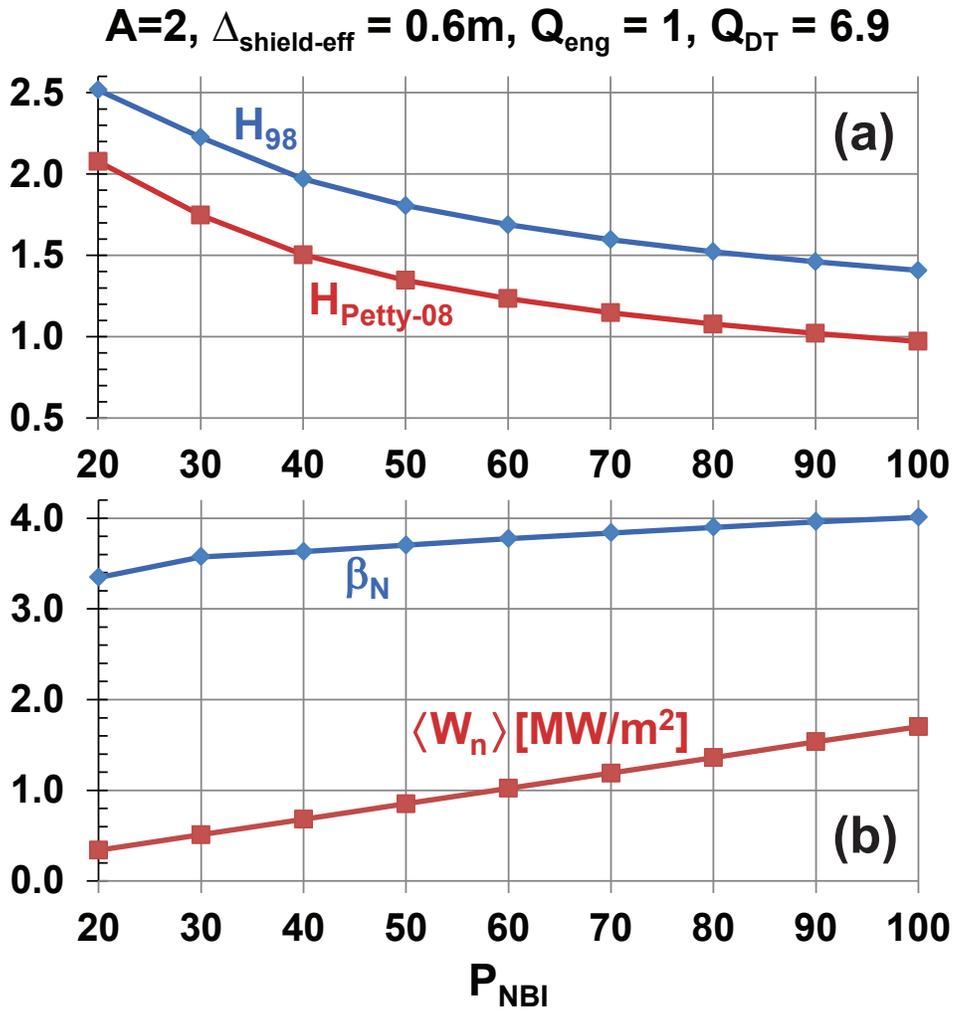


Figure 49. (a) Confinement multipliers H_{98} and $H_{\text{Petty-08}}$ and (b) normalized beta and surface-average neutron flux at plasma boundary at A=2 with an effective inboard shielding thickness = 0.6m and fixed $Q_{\text{eng}} = 1$ and $Q_{\text{DT}} = 6.9$.

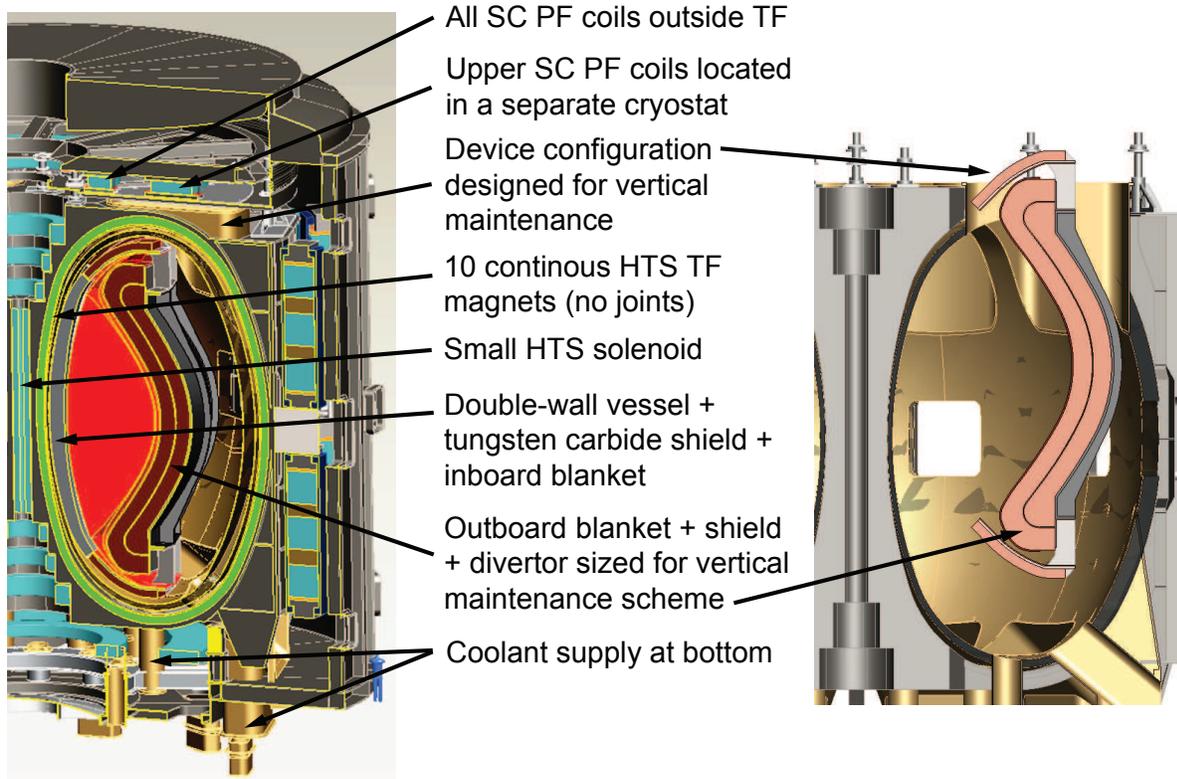


Figure 50. Cross-sectional views of $A=2$, $R_0 = 3\text{m}$ HTS FNSF / Pilot Plant.

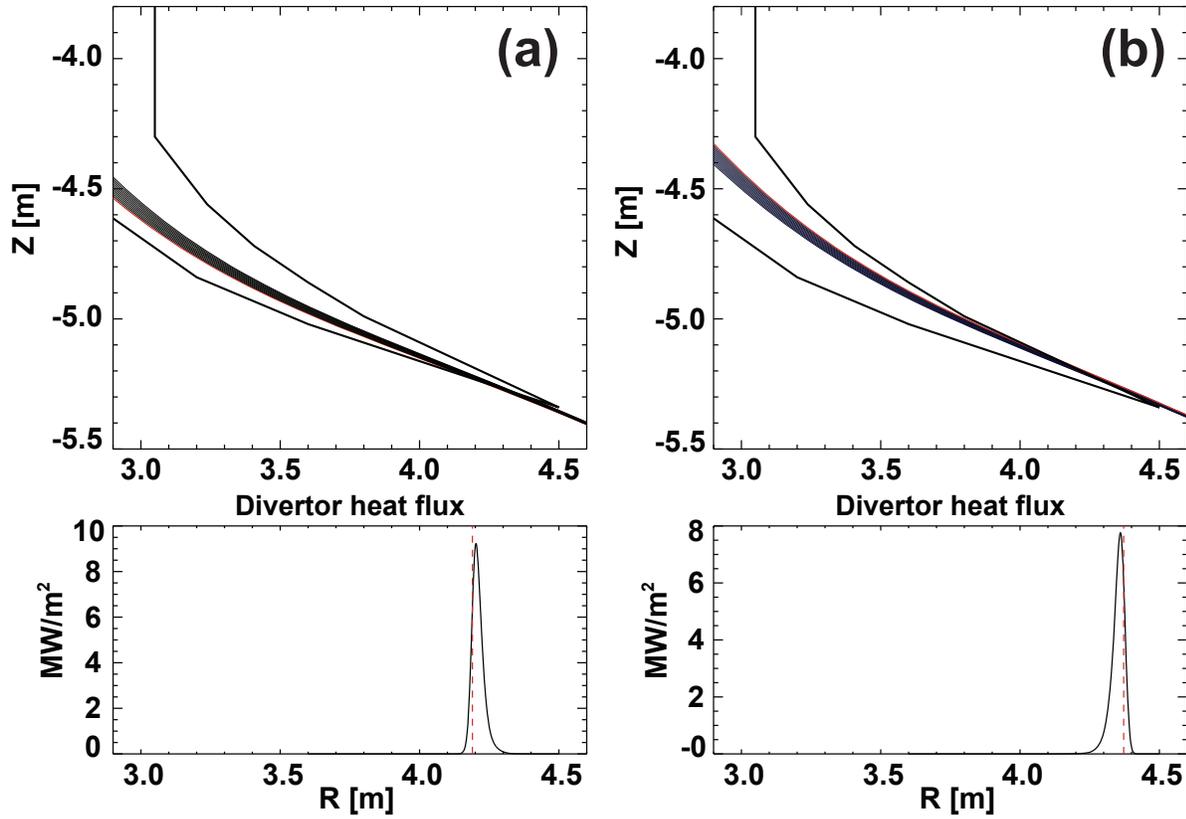


Figure 51. (Upper) Long-leg divertor regions including limiter outlines (thicker black lines) and poloidal flux contours (thinner black lines) with separatrix flux contours shown in red, and (bottom) divertor heat flux profiles with radii of strike-points indicated by red dashed line for divertor target locations (a) farther and (b) closer to mid-plane for $A=2$, $R_0 = 3\text{m}$ HTS FNSF / Pilot Plant with $P_{NBI} = 50\text{MW}$ and $P_{fusion} = 560\text{MW}$.

- [1] NEILSON, G. H., BROWN, T. G., GATES, D. A., KESSEL, C. E., MENARD, J. E., et al., *Fusion Science and Technology* **64** (2013) 463.
- [2] WAGANER, L., NAJMABADI, F., and TILLACK, M., What must DEMO do?, in *Proceedings of 16th International Symposium on Fusion Engineering*, volume 2, pp. 1157–1161, IEEE, 1995.
- [3] MENARD, J., BROMBERG, L., BROWN, T., BURGESS, T., DIX, D., et al., *Nuclear Fusion* **51** (2011) 103014.
- [4] PENG, Y.-K. M., FOGARTY, P. J., BURGESS, T. W., STRICKLER, D. J., NELSON, B. E., et al., *Plasma Physics and Controlled Fusion* **47** (2005) B263.
- [5] Y.-K.M. Peng, T.W. Burgess, A.J. Carroll, C.L. Neumeyer, J.M. Canik, M.J. Cole, W.D. Dorland, P.J. Fogarty, L. Grisham, D.L. Hillis, Y. Katoh, K. Korsah, M. Kotschenreuther, R. LaHaye, S. Mahajan, R. Majeski, B.E. Nelson, B.D. Patton, D.A. Rasmussen, S.A., A. S. and R.E. Stoller, C.-C. Tsai, P. Valanju, J.C. Wagner, G. Y., *Fusion Science and Technology* **56** (2009) 957.
- [6] VOSS, G., DAVIS, S., DNESTROVSKIJ, A., KIRK, A., KNIGHT, P., et al., *Fusion Engineering and Design* **83** (2008) 1648.
- [7] KOTSCHENREUTHER, M., VALANJU, P., MAHAJAN, S., and SCHNEIDER, E., *Fusion Engineering and Design* **84** (2009) 83.
- [8] KUTEEV, B., AZIZOV, E., A.S. BYKOV, DNESTROVSKY, A., DOKUKA, V., et al., *Nuclear Fusion* **51** (2011) 073013.
- [9] CHAN, V., STAMBAUGH, R., and GAROFALO, A., *Fusion Science and Technology* **57** (2010) 66.
- [10] GAROFALO, A., CHAN, V., CANIK, J., SAWAN, M., CHOI, M., et al., *Nuclear Fusion* **54** (2014) 073015.
- [11] ABDOU, M., BERK, S., YING, A., PENG, Y., SHARAFAT, S., et al., *Fusion Technology* **29** (1996) 1.
- [12] FISHPOOL, G., CANIK, J., CUNNINGHAM, G., HARRISON, J., KATRAMADOS, I., et al., *Journal of Nuclear Materials* **438** (2013) S356.
- [13] GOLDSTON, R., WHITE, R., and BOOZER, A., *Physical Review Letters* **47** (1981) 647.
- [14] PANKIN, A., BATEMAN, G., BUDNY, R., KRITZ, A., MCCUNE, D., et al., *Computer Physics Communications* **164** (2004) 421.
- [15] PANKIN, A., MCCUNE, D., ANDRE, R., BATEMAN, G., and KRITZ, A., *Computer Physics Communications* **159** (2004) 157.
- [16] HUBA, J. D., *NRL Plasma Formulary*, Naval Research Laboratory, Washington, DC, 2013.
- [17] MENARD, J. E., BELL, M. G., BELL, R. E., GATES, D. A., KAYE, S. M., et al., *Physics of Plasmas* **11** (2004) 639.
- [18] MENARD, J., JARDIN, S., KAYE, S., KESSEL, C., and MANICKAM, J., *Nuclear Fusion* **37** (1997) 595.
- [19] WONG, C., WESLEY, J., STAMBAUGH, R., and CHENG, E., *Nuclear Fusion* **42** (2002) 547.
- [20] MENARD, J. E., BELL, M. G., BELL, R. E., GATES, D. A., KAYE, S. M., et al., *Unified Ideal Stability Limits for Advanced Tokamak and Spherical Torus Plasmas*, Technical report, PPPL-3779, 2003.
- [21] NAJMABADI, F., *Fusion Engineering and Design* **65** (2003) 143.
- [22] PENG, Y., PARK, J., CANIK, J., DIEM, S., SONTAG, A., et al., *Fusion Nuclear Science Facility (FNSF)*, in *2011 IEEE/NPSS 24th Symposium on Fusion Engineering*, pp. 1–7, IEEE, 2011.
- [23] LUMSDAINE, A. and PENG, M., *Structural analysis of an optimally designed spherical tokamak centerpost*, in *2011 IEEE/NPSS 24th Symposium on Fusion Engineering*, pp. 1–6, IEEE, 2011.
- [24] LUMSDAINE, A., TIPTON, J., and PENG, M., *Fusion Engineering and Design* **87** (2012) 1190.
- [25] ROBERTO, M. and GALVAO, R., *Nuclear Fusion* **32** (1992) 1666.
- [26] KOLEMEN, E., GATES, D., GERHARDT, S., KAITA, R., KUGEL, H., et al., *Nuclear Fusion* **51** (2011) 113024.
- [27] MENARD, J., GERHARDT, S., BELL, M., BIALEK, J., BROOKS, A., et al., *Nuclear Fusion* **52** (2012) 083015.

- [28] GERHARDT, S., ANDRE, R., and MENARD, J., *Nuclear Fusion* **52** (2012) 083020.
- [29] GERHARDT, S., BELL, R., DIALLO, A., GATES, D., LEBLANC, B., et al., *Nuclear Fusion* **53** (2013) 043020.
- [30] SABBAGH, S. A., BELL, R. E., BELL, M. G., BIALEK, J., GLASSER, A. H., et al., *Physics of Plasmas* **9** (2002) 2085.
- [31] PAOLETTI, F., SABBAGH, S., MANICKAM, J., MENARD, J., AKERS, R., et al., *Nuclear Fusion* **42** (2002) 418.
- [32] SABBAGH, S., A.C SONTAG, BIALEK, J., GATES, D., A.H GLASSER, et al., *Nuclear Fusion* **46** (2006) 635.
- [33] MENARD, J., WANG, Z., LIU, Y., BELL, R., KAYE, S., et al., *Physical Review Letters* **113** (2014) 255002.
- [34] BERKERY, J., SABBAGH, S., BELL, R., GERHARDT, S., LEBLANC, B., et al., *Nuclear Fusion* **55** (2015) 123007.
- [35] BONDESON, A. and WARD, D., *Physical Review Letters* **72** (1994) 2709.
- [36] BETTI, R. and FREIDBERG, J., *Physical review letters* **74** (1995) 2949.
- [37] BOOZER, A. H., *Physics of Plasmas* **2** (1995) 4521.
- [38] SONTAG, A. C., SABBAGH, S. A., ZHU, W., BIALEK, J. M., MENARD, J. E., et al., *Physics of Plasmas* **12** (2005) 056112.
- [39] A.C SONTAG, SABBAGH, S., ZHU, W., MENARD, J., BELL, R., et al., *Nuclear Fusion* **47** (2007) 1005.
- [40] LIU, Y., CHU, M. S., GIMBLETT, C. G., and HASTIE, R. J., *Physics of Plasmas* **15** (2008) 092505.
- [41] LIU, Y., CHU, M. S., CHAPMAN, I. T., and HENDER, T. C., *Physics of Plasmas* **15** (2008) 112503.
- [42] BERKERY, J. W., SABBAGH, S. A., BETTI, R., HU, B., BELL, R. E., et al., *Physical Review Letters* **104** (2010) 035003.
- [43] BERKERY, J. W., SABBAGH, S. A., REIMERDES, H., BETTI, R., HU, B., et al., *Physics of Plasmas* **17** (2010) 082504.
- [44] MENARD, J., BELL, R., GATES, D., GERHARDT, S., PARK, J.-K., et al., *Nuclear Fusion* **50** (2010) 045008.
- [45] BERKERY, J., SABBAGH, S., BETTI, R., BELL, R., GERHARDT, S., et al., *Physical Review Letters* **106** (2011) 3.
- [46] BIALEK, J., BOOZER, A. H., MAUEL, M. E., and NAVRATIL, G. A., *Physics of Plasmas* **8** (2001) 2170.
- [47] SABBAGH, S., BIALEK, J., BELL, R., A.H GLASSER, LEBLANC, B., et al., *Nuclear Fusion* **44** (2004) 560.
- [48] SABBAGH, S., BELL, R., MENARD, J., GATES, D., SONTAG, A., et al., *Physical Review Letters* **97** (2006) 045004.
- [49] SABBAGH, S., BERKERY, J., BELL, R., BIALEK, J., GERHARDT, S., et al., *Nuclear Fusion* **50** (2010) 025020.
- [50] KATSURO-HOPKINS, O., BIALEK, J., MAURER, D., and NAVRATIL, G., *Nuclear Fusion* **47** (2007) 1157.
- [51] KATSURO-HOPKINS, O., SABBAGH, S., and BIALEK, J., Analysis of resistive wall mode LQG control in NSTX with mode rotation, in *Proceedings of the 48th IEEE Conference on Decision and Control (CDC) held jointly with 2009 28th Chinese Control Conference*, pp. 309–314, IEEE, 2009.
- [52] ITER Physics Expert Group on Confinement and Transport and Confinement Modelling and Database and ITER Physics Basis Editors, *Nuclear Fusion* **39** (1999) 2175.
- [53] DOYLE, E., HOULBERG, W., KAMADA, Y., MUKHOVATOV, V., OSBORNE, T., et al., *Nuclear Fusion* **47** (2007) S18.
- [54] KAYE, S., LEVINTON, F., STUTMAN, D., TRITZ, K., YUH, H., et al., *Nuclear Fusion* **47**

- (2007) 499.
- [55] KAYE, S., BELL, R., GATES, D., LEBLANC, B., LEVINTON, F., et al., *Physical Review Letters* **98** (2007) 1.
- [56] VALOVIC, M., AKERS, R., CUNNINGHAM, G., GARZOTTI, L., LLOYD, B., et al., *Nuclear Fusion* **49** (2009) 075016.
- [57] VALOVIC, M., AKERS, R., DE BOCK, M., MCCONE, J., GARZOTTI, L., et al., *Nuclear Fusion* **51** (2011) 073045.
- [58] LUCE, T. C., PETTY, C. C., and CORDEY, J. G., *Plasma Physics and Controlled Fusion* **50** (2008) 043001.
- [59] PETTY, C. C., *Physics of Plasmas* **15** (2008) 080501.
- [60] GREENWALD, M., TERRY, J., WOLFE, S., EJIMA, S., BELL, M., et al., *Nuclear Fusion* **28** (1988) 2199.
- [61] GREENWALD, M., *Plasma Physics and Controlled Fusion* **44** (2002) R27.
- [62] MAINGI, R., BELL, R., LEBLANC, B., GATES, D., KAYE, S., et al., *Journal of Nuclear Materials* **390-391** (2009) 440.
- [63] MAINGI, R., BELL, R. E., CANIK, J. M., GERHARDT, S. P., KAYE, S. M., et al., *Physical Review Letters* **105** (2010) 135004.
- [64] GERHARDT, S., CANIK, J., MAINGI, R., BATTAGLIA, D., BELL, R., et al., *Nuclear Fusion* **54** (2014) 083021.
- [65] ONO, M., *Physics of Plasmas* **2** (1995) 4075.
- [66] MENARD, J., MAJESKI, R., KAITA, R., ONO, M., and MUNSAT, T., *Physics of Plasmas* **6** (1999) 2002.
- [67] TAYLOR, G., BELL, R. E., HOSEA, J. C., LEBLANC, B. P., PHILLIPS, C. K., et al., *Physics of Plasmas* **17** (2010) 056114.
- [68] HOSEA, J., BELL, R. E., LEBLANC, B. P., PHILLIPS, C. K., TAYLOR, G., et al., *Physics of Plasmas* **15** (2008) 056104.
- [69] PHILLIPS, C., BELL, R., BERRY, L., BONOLI, P., HARVEY, R., et al., *Nuclear Fusion* **49** (2009) 075015.
- [70] GREEN, D., BERRY, L., CHEN, G., RYAN, P., CANIK, J., et al., *Physical Review Letters* **107** (2011) 1.
- [71] PERKINS, R., HOSEA, J., KRAMER, G., AHN, J.-W., BELL, R., et al., *Physical Review Letters* **109** (2012) 1.
- [72] PERKINS, R., AHN, J.-W., BELL, R., DIALLO, A., GERHARDT, S., et al., *Nuclear Fusion* **53** (2013) 083025.
- [73] BERTELLI, N., JAEGER, E., HOSEA, J., PHILLIPS, C., BERRY, L., et al., *Nuclear Fusion* **54** (2014) 083004.
- [74] ROSENBERG, A. L., MENARD, J. E., WILSON, J. R., MEDLEY, S. S., ANDRE, R., et al., *Physics of Plasmas* **11** (2004) 2441.
- [75] LIU, D., HEIDBRINK, W. W., PODESTÀ, M., BELL, R. E., FREDRICKSON, E. D., et al., *Plasma Physics and Controlled Fusion* **52** (2010) 025006.
- [76] HARVEY, R. W., PETROV, Y. V., LIU, D., HEIDBRINK, W. W., TAYLOR, G., et al., **314** (2014) 314.
- [77] TAYLOR, G., HOSEA, J. C., KESSEL, C. E., LEBLANC, B. P., MUELLER, D., et al., *Physics of Plasmas* **19** (2012) 042501.
- [78] TAYLOR, G., EFTHIMION, P. C., KESSEL, C. E., HARVEY, R. W., SMIRNOV, A. P., et al., *Physics of Plasmas* **11** (2004) 4733.
- [79] PREINHAELTER, J., *AIP Conference Proceedings* **787** (2005) 349.
- [80] URBAN, J., DECKER, J., PEYSSON, Y., PREINHAELTER, J., SHEVCHENKO, V., et al., *Nuclear Fusion* **51** (2011) 083050.
- [81] JONES, B., EFTHIMION, P., TAYLOR, G., MUNSAT, T., WILSON, J., et al., *Physical Review Letters* **90** (2003) 1.

- [82] DIEM, S., TAYLOR, G., CAUGHMAN, J., EFTHIMION, P., KUGEL, H., et al., *Nuclear Fusion* **49** (2009) 095027.
- [83] DIEM, S., TAYLOR, G., CAUGHMAN, J., EFTHIMION, P., KUGEL, H., et al., *Physical Review Letters* **103** (2009) 1.
- [84] KOTSCHENREUTHER, M., DORLAND, W., LIU, Q., ZARNSTORFF, M., MILLER, R., et al., *Nuclear Fusion* **40** (2000) 677.
- [85] KAYE, S., SOLOMON, W., BELL, R., LEBLANC, B., LEVINTON, F., et al., *Nuclear Fusion* **49** (2009) 045010.
- [86] YUH, H. Y., LEVINTON, F. M., BELL, R. E., HOSEA, J. C., KAYE, S. M., et al., *Physics of Plasmas* **16** (2009) 056120.
- [87] JANEV, R., BOLEY, C., and POST, D., *Nuclear Fusion* **29** (1989) 2125.
- [88] HEMSWORTH, R., *Nuclear Fusion* **43** (2003) 851.
- [89] VON HALLE, A., BOWEN, O., EDWARDS, J., GRISHAM, L., NEWMAN, R., et al., TPX Neutral Beam injection system design, in *15th IEEE/NPSS Symposium. Fusion Engineering*, volume 1, pp. 212–215, IEEE, 1993.
- [90] PAMELA, J., *Plasma Physics and Controlled Fusion* **37** (1995) A325.
- [91] BACAL, M., *Nuclear Fusion* **46** (2006) S250.
- [92] KOJIMA, A., HANADA, M., TANAKA, Y., INOUE, T., WATANABE, K., et al., *Review of Scientific Instruments* **81** (2010) 02B112.
- [93] KOJIMA, A., HANADA, M., TANAKA, Y., KAWAI, M., AKINO, N., et al., *Nuclear Fusion* **51** (2011) 083049.
- [94] KOJIMA, A., HANADA, M., YOSHIDA, M., TOBARI, H., KASHIWAGI, M., et al., *The Review of scientific instruments* **85** (2014) 02B312.
- [95] HEMSWORTH, R., DECAMPS, H., GRACEFFA, J., SCHUNKE, B., TANAKA, M., et al., *Nuclear Fusion* **49** (2009) 045006.
- [96] FRANZEN, P., HEINEMANN, B., FANTZ, U., WÜNDERLICH, D., KRAUS, W., et al., *Fusion Engineering and Design* **88** (2013) 3132.
- [97] IVANOV, A. A., ABDRAHIMOV, G. F., ANASHIN, V. V., BELCHENKO, Y. I., BURDAKOV, A. V., et al., *Review of Scientific Instruments* **85** (2014) 02B102.
- [98] START, D. F. H., CORDEY, J. G., and JONES, E. M., *Plasma Physics* **22** (1980) 303.
- [99] CORDEY, J. G., *Plasma Physics and Controlled Fusion* **26** (1984) 123.
- [100] FISCH, N., *Reviews of Modern Physics* **59** (1987) 175.
- [101] MENARD, J., BELL, R., GATES, D., KAYE, S., LEBLANC, B., et al., *Physical Review Letters* **97** (2006) 095002.
- [102] GERHARDT, S., FREDRICKSON, E., GATES, D., KAYE, S., MENARD, J., et al., *Nuclear Fusion* **51** (2011) 033004.
- [103] STRACHAN, J., BELL, M., BITTER, M., BUDNY, R., HAWRYLUK, R., et al., *Nuclear Fusion* **33** (1993) 991.
- [104] BICKERTON, R. J., CONNOR, J. W., and TAYLOR, J. B., *Nature Physical Science* **229** (1971) 110.
- [105] ZARNSTORFF, M., BELL, M., BITTER, M., GOLDSTON, R., GREK, B., et al., *Physical Review Letters* **60** (1988) 1306.
- [106] WILSON, H., *Nuclear Fusion* **32** (1992) 257.
- [107] PODESTA, M., GORELENKOV, N. N., WHITE, R. B., FREDRICKSON, E. D., GERHARDT, S. P., et al., *Physics of Plasmas* **20** (2013) 082502.
- [108] FREDRICKSON, E., GORELENKOV, N., PODESTA, M., BORTOLON, A., GERHARDT, S., et al., *Nuclear Fusion* **54** (2014) 093007.
- [109] NAJMABADI, F., ABDOU, A., BROMBERG, L., BROWN, T., CHAN, V., et al., *Fusion Engineering and Design* **80** (2006) 3.
- [110] CANIK, J. M., GRAY, T. K., MAINGI, R., and MENARD, J. E., Power and particle exhaust in an ST-FNSF, in *2013 IEEE 25th Symposium on Fusion Engineering (SOFE)*, pp. 1–6, IEEE,

- 2013.
- [111] RYUTOV, D. D., *Physics of Plasmas* **14** (2007) 064502.
 - [112] KOTSCHENREUTHER, M., VALANJU, P. M., MAHAJAN, S. M., and WILEY, J. C., *Physics of Plasmas* **14** (2007) 072502.
 - [113] TENNEY, F., *A Tokamak Hybrid Study*, Technical report, Princeton Plasma Physics Laboratory, Report Number 1284, 1976.
 - [114] VALANJU, P. M., KOTSCHENREUTHER, M., MAHAJAN, S. M., and CANIK, J., *Physics of Plasmas* **16** (2009) 056110.
 - [115] KOTSCHENREUTHER, M., VALANJU, P., MAHAJAN, S., ZHENG, L., PEARLSTEIN, L., et al., *Nuclear Fusion* **50** (2010) 035003.
 - [116] HERRMANN, A., *Plasma Physics and Controlled Fusion* **44** (2002) 883.
 - [117] LABOMBARD, B., GOETZ, J., HUTCHINSON, I., JABLONSKI, D., KESNER, J., et al., *Journal of Nuclear Materials* **241-243** (1997) 149.
 - [118] LOARTE, A., *Plasma Physics and Controlled Fusion* **43** (2001) R183.
 - [119] SOUKHANOVSII, V. A., BELL, R. E., DIALLO, A., GERHARDT, S., KAYE, S., et al., *Physics of Plasmas* **19** (2012) 082504.
 - [120] AHN, J.-W. and COUNSELL, G., *Journal of Nuclear Materials* **290-293** (2001) 820.
 - [121] COUNSELL, G. F., AHN, J.-W., AKERS, R., ARENDS, E., BUTTERY, R., et al., *Plasma Physics and Controlled Fusion* **44** (2002) B23.
 - [122] PAUL, S., MAINGI, R., SOUKHANOVSII, V., KAYE, S., and KUGEL, H., *Journal of Nuclear Materials* **337-339** (2005) 251.
 - [123] TURNBULL, A. D., LIN-LIU, Y. R., MILLER, R. L., TAYLOR, T. S., and TODD, T. N., *Physics of Plasmas* **6** (1999) 1113.
 - [124] BROWN, T., MENARD, J., TITUS, P., ZOLFAGHARI, A., GUEBALY, L. E., et al., *Progress in developing the STFNSF configuration*, in *2013 IEEE 25th Symposium on Fusion Engineering (SOFE)*, pp. 1–6, IEEE, 2013.
 - [125] MUZZI, L., De Marzi, G., Di Zenobio, A., and DELLA CORTE, A., *Superconductor Science and Technology* **28** (2015) 053001.
 - [126] ILYIN, Y., BESSETTE, D., ZAPRETELINA, E., LUONGO, C., SIMON, F., et al., *IEEE Transactions on Applied Superconductivity* **20** (2010) 415.
 - [127] LIM, B., SIMON, F., ILYIN, Y., GUNG, C. Y., SMITH, J., et al., *IEEE Transactions on Applied Superconductivity* **21** (2011) 1918.
 - [128] EVERITT, D., REIERSEN, W., MARTOVETSKY, N., HUSSUNG, R., LITHERLAND, S., et al., *ITER Central Solenoid design*, in *2013 IEEE 25th Symposium on Fusion Engineering (SOFE)*, pp. 1–8, IEEE, 2013.
 - [129] KIM, K., OH, S., PARK, J. S., LEE, C., IM, K., et al., *Fusion Engineering and Design* **96-97** (2015) 281.
 - [130] TAKAYASU, M., CHIESA, L., BROMBERG, L., and MINERVINI, J. V., *Superconductor Science and Technology* **25** (2012) 014011.
 - [131] VAN DER LAAN, D. C., NOYES, P. D., MILLER, G. E., WEIJERS, H. W., and WILLERING, G. P., *Superconductor Science and Technology* **26** (2013) 045005.
 - [132] EICH, T., SIEGLIN, B., SCARABOSIO, A., FUNDAMENSKI, W., GOLDSTON, R. J., et al., *Physical Review Letters* **107** (2011) 215001.
 - [133] GOLDSTON, R., *Nuclear Fusion* **52** (2012) 013009.
 - [134] MAKOWSKI, M. A., ELDER, D., GRAY, T. K., LABOMBARD, B., LASNIER, C. J., et al., *Physics of Plasmas* **19** (2012) 056122.
 - [135] EICH, T., A.W. LEONARD, PITTS, R., FUNDAMENSKI, W., GOLDSTON, R., et al., *Nuclear Fusion* **53** (2013) 093031.
 - [136] MEIER, E., GERHARDT, S., MENARD, J., ROGNLIEN, T., and SOUKHANOVSII, V., *Nuclear Fusion* **55** (2015) 086002.
 - [137] SCHNEIDER, R., BONNIN, X., BORRASS, K., COSTER, D. P., KASTELEWICZ, H., et al.,

- Contributions to Plasma Physics **46** (2006) 3.
- [138] BRAAMS, B. J., Contributions to Plasma Physics **36** (1996) 276.
- [139] REITER, D., BAELMANS, M., and BÖRNER, P., Fusion Science and Technology **47** (2005) 172.
- [140] MARTIN, Y. R., TAKIZUKA, T., and GROUP, T. I. C. H.-M. T. D., Journal of Physics: Conference Series **123** (2008) 012033.
- [141] LABOMBARD, B., MARMAR, E., IRBY, J., TERRY, J., VIEIRA, R., et al., Nuclear Fusion **55** (2015) 053020.
- [142] HAWRYLUK, R., An empirical approach to tokamak transport, in Coppi, B.; Leotta, G.G.; Pfirsch, D.; Pozzoli, R.; Sindoni, E., editor, *Physics of Plasmas Close to Thermonuclear Conditions*, volume 1, pp. 19–46, International school of plasma physics; Varenna, Italy; 27 Aug - 8 Sep 1979, 1981, Commission of the European Communities, Brussels (Belgium).
- [143] ONGENA, J., EVRARD, M., and MCCUNE, D., Fusion Science and Technology **45** (2004) 371.
- [144] MUELLER, D., Physics of Plasmas **20** (2013) 058101.
- [145] RAMAN, R. and SHEVCHENKO, V. F., Plasma Physics and Controlled Fusion **56** (2014) 103001.
- [146] RAMAN, R., JARBOE, T. R., NELSON, B. A., MUELLER, D., JARDIN, S. C., et al., IEEE Transactions on Plasma Science **42** (2014) 2154.
- [147] RAMAN, R., Fusion Science and Technology **68** (2015).
- [148] RAMAN, R., JARBOE, T., MUELLER, D., SCHAFFER, M., MAQUEDA, R., et al., Nuclear Fusion **41** (2001) 1081.
- [149] SCHAFFER, M., MAINGI, R., HYATT, A., and MAHDAVI, M. A., Nuclear Fusion **36** (1996) 495.
- [150] CLINARD, F., HURLEY, G., and HOBBS, L., Journal of Nuclear Materials **108-109** (1982) 655.
- [151] SCHULTZ, J., Sizing of the thermal and electrical systems for an FED bundle divertor design with MgO insulation, Technical Report DOE/ET/51013-2, 1981.
- [152] TANAKA, K., HIROSE, E., TAKAHASHI, H., AGARI, K., TOYODA, A., et al., IEEE Transactions on Applied Superconductivity **14** (2004) 402.
- [153] EL-GUEBALY, L., MYNSBERGE, L., MENARD, J., BROWN, T., MALANG, S., et al., IEEE Transactions on Plasma Science **42** (2014) 1457.
- [154] BROWN, T., MENARD, J., EL-GUEBLAY, L., and DAVIS, A., Fusion Science and Technology **68** (2015).
- [155] SNYDER, P., WILSON, H., FERRON, J., LAO, L., A.W LEONARD, et al., Nuclear Fusion **44** (2004) 320.
- [156] SNYDER, P. B., WILSON, H. R., OSBORNE, T. H., and LEONARD, A. W., Plasma Physics and Controlled Fusion **46** (2004) A131.
- [157] DIALLO, A., MAINGI, R., KUBOTA, S., SONTAG, A., OSBORNE, T., et al., Nuclear Fusion **51** (2011) 103031.
- [158] DIALLO, A., CANIK, J., GÖERLER, T., KU, S.-H., KRAMER, G., et al., Nuclear Fusion **53** (2013) 093026.
- [159] ONO, M., CHRZANOWSKI, J., DUDEK, L., GERHARDT, S., HEITZENROEDER, P., et al., Nuclear Fusion **55** (2015) 073007.
- [160] YUSHMANOV, P., Nuclear Fusion **23** (1983) 1599.
- [161] MCCLEMENTS, K. G. and HOLE, M. J., Physics of Plasmas **19** (2012) 072514.
- [162] URANO, H., KAMIYA, K., KOIDE, Y., TAKIZUKA, T., OYAMA, N., et al., Plasma Physics and Controlled Fusion **48** (2006) A193.
- [163] SHINOHARA, K., SAKURAI, S., ISHIKAWA, M., TSUZUKI, K., SUZUKI, Y., et al., Nuclear Fusion **47** (2007) 997.
- [164] SAIBENE, G., OYAMA, N., LÖNNROTH, J., ANDREW, Y., LUNA, E. D. L., et al., Nuclear Fusion **47** (2007) 969.

- [165] Los Alamos National Laboratory, A General Monte Carlo N-Particle (MCNP) Transport Code; <https://mcnp.lanl.gov/>, 2015.
- [166] University of Wisconsin - Madison Fusion Technology Institute, DAGMC Users Guide; <http://svalinn.github.io/DAGMC/usersguide/>, 2015.
- [167] MALANG, S., TILLACK, M., WONG, C. P. C., MORLEY, N., and SMOLENTSEV, S., *Fusion Science & Technology* **60** (2011) 249.
- [168] SIMON, N., Radiation Limits for Nb₃Sn Superconductors for ITER Magnets: A literature review, Technical report, Oak Ridge Operations, Oak Ridge, TN, 1995.
- [169] KURODA, K., KATAGIRI, K., KODAKA, H., YUYAMA, M., WADA, H., et al., *Journal of the Atomic Energy Society of Japan / Atomic Energy Society of Japan* **37** (1995) 652.
- [170] NISHIMURA, A., TAKEUCHI, T., NISHIJIMA, S., NISHIJIMA, G., SHIKAMA, T., et al., *Fusion Engineering and Design* **84** (2009) 1425.
- [171] SCHULTZ, J., Radiation resistance of fusion magnet materials, in *20th IEEE/NPSS Symposium on Fusion Engineering, 2003.*, pp. 423–426, IEEE, 2003.
- [172] NISHIMURA, A., IZUMI, Y., IMAIZUMI, M., and NISHIJIMA, S., Radiation effect on interlaminar shear strength of the electric insulation system with cyanate ester and epoxy blended resin, in *Advances in Cryogenic Engineering*, pp. 99–106, 2012.
- [173] ITER Magnet Superconducting and Electrical Design Criteria (ITER_D.22GRQH v1.2), 2009.
- [174] BOUTBOUL, T., ABAECHERLI, V., BERGER, G., HAMPSHIRE, D., PARRELL, J., et al., *IEEE Transactions on Applied Superconductivity* **26** (2016) 1.
- [175] BAUMGARTNER, T., EISTERER, M., WEBER, H. W., FLÜKIGER, R., SCHEUERLEIN, C., et al., *Scientific Reports* **5** (2015) 10236.
- [176] ZINKLE, S. J., *Physics of Plasmas* **12** (2005) 058101.
- [177] ZINKLE, S. J. and BUSBY, J. T., *Materials Today* **12** (2009) 12.
- [178] ZINKLE, S., MÖSLANG, A., MUROGA, T., and TANIGAWA, H., *Nuclear Fusion* **53** (2013) 104024.
- [179] STORK, D., AGOSTINI, P., BOUTARD, J.-L., BUCKTHORPE, D., DIEGELE, E., et al., *Fusion Engineering and Design* **89** (2014) 1586.
- [180] FABRITSIEV, S., ZINKLE, S., and SINGH, B., *Journal of Nuclear Materials* **233-237** (1996) 127.
- [181] REIERSEN, W., DAHLGREN, F., FAN, H., NEUMEYER, C., and ZATZ, I., *Fusion Engineering and Design* **65** (2003) 303.
- [182] TOBITA, K., NISHIO, S., SATO, M., SAKURAI, S., HAYASHI, T., et al., *Nuclear Fusion* **47** (2007) 892.
- [183] NI, M., WANG, Y., YUAN, B., JIANG, J., and WU, Y., *Fusion Engineering and Design* **88** (2013) 2422.
- [184] BAKER, N., MCKEE, B., and MCNAB, I., *IEEE Transactions on Magnetics* **22** (1986) 1386.
- [185] WERST, M., BRUNSON, G., HSIEH, K., SLEDGE, R., and WELDON, W., Design of a prototype 20 Tesla, single turn, toroidal field coil for the Fusion Ignition Experiment (IGNITEX), in *IEEE Thirteenth Symposium on Fusion Engineering*, pp. 43–46, IEEE, 1989.
- [186] HSIEH, K., DRIGA, M., WELDON, W., and WERST, M., Electromechanical analysis of a prototype 20 Tesla, single turn toroidal field coil for IGNITEX, in *IEEE Thirteenth Symposium on Fusion Engineering*, pp. 1138–1141, IEEE, 1989.
- [187] WERST, M., INGRAM, S., WEHRLIN, D., and WELDON, W., *IEEE Transactions on Magnetics* **30** (1994) 2550.
- [188] HONG, B., HWANG, Y., KANG, J., LEE, D., JOO, H., et al., *Nuclear Fusion* **51** (2011) 113013.
- [189] GI, K., ONO, Y., NAKAMURA, M., SOMEYA, Y., UTOH, H., et al., *Nuclear Fusion* **55** (2015) 063036.
- [190] WINDSOR, C., MORGAN, J., and BUXTON, P., *Nuclear Fusion* **55** (2015) 023014.
- [191] SORBOM, B., BALL, J., PALMER, T., MANGIAROTTI, F., SIERCHIO, J., et al., *Fusion Engineering and Design* **100** (2015) 378.

- [192] GATES, D., MENARD, J., MAINGI, R., KAYE, S., SABBAGH, S., et al., *Nuclear Fusion* **47** (2007) 1376.
- [193] LAZARUS, E. A., CHU, M. S., FERRON, J. R., HELTON, F. J., HOGAN, J. T., et al., *Physics of Fluids B: Plasma Physics* **3** (1991) 2220.
- [194] ZOHRM, H., ANGIONI, C., FABLE, E., FEDERICI, G., GANTENBEIN, G., et al., *Nuclear Fusion* **53** (2013) 073019.
- [195] SCHWARTZ, J., *Journal of Fusion Energy* **11** (1992) 19.
- [196] BARTH, C., MONDONICO, G., and SENATORE, C., *Superconductor Science and Technology* **28** (2015) 045011.
- [197] PROKOPEC, R., FISCHER, D. X., WEBER, H. W., and EISTERER, M., *Superconductor Science and Technology* **28** (2015) 014005.
- [198] EL-GUEBALY, L., *Fusion Engineering and Design* **80** (2006) 99.
- [199] EL-GUEBALY, L. A., *Fusion Engineering and Design* **65** (2003) 263.
- [200] COSTLEY, A., HUGILL, J., and BUXTON, P., *Nuclear Fusion* **55** (2015) 033001.
- [201] GRYAZNEVICH, M., SHEVCHENKO, V., and SYKES, A., *Nuclear Fusion* **46** (2006) S573.
- [202] TOBITA, K., NISHIO, S., ENOEDA, M., SATO, M., ISONO, T., et al., *Fusion Engineering and Design* **81** (2006) 1151.
- [203] NISHITANI, T., YAMAUCHI, M., NISHIO, S., and WADA, M., *Fusion Engineering and Design* **81** (2006) 1245.